RoHS Compliant

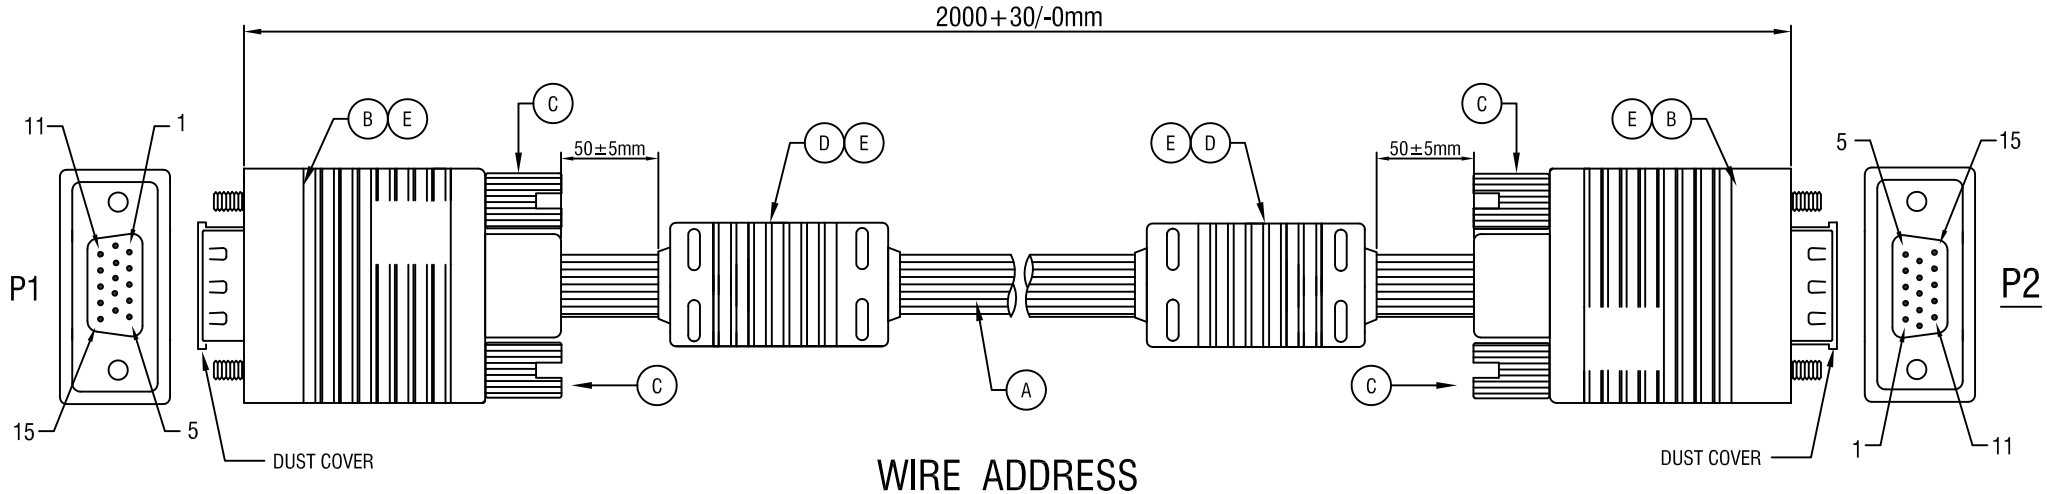

WIRE ADDRESS

P1	P2		
1	1	CENTER	Red Coax
6	6	GND	
2	2	CENTER	Green Coax
7	7	GND	
3	3	CENTER	Blue Coax
8	8	GND	
4	4		
5	5		
9	9		
10	10		
11	11		
12	12		
13	13		
14	14		
15	15		
64	64		

Electrical Test:
1.100% TEST OPEN SHORT MIS-WIRE.
2.CONTACT RESISTANCE:3Ω MAX.
3.INSULATION RESISTANCE:5MΩ MIN.
4.HI-POT:300V DC/10MS.
5.Real Test Passed 1280*1024.
6.Real Test Not Twinkling,Double Vision and Decolor.

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
E	45P BLACK PVC		G
D	Ferrite Core (17.5*28.5*9.5mm)	2	PCS
C	HD37.7 Screw	4	PCS
B	HDB15P MALE(Black Insulator Nickel Plated)	2	PCS
A	UL2919,28# 3COAX+28#*9C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	1	PCS

ROLINE High Quality Cable with Ferrite + DDC, HD15 M - HD15 M, 2.0m

Item	11.04.5652	
Draw	Kobe	Date: 2020.05.13
Approval		
Duty	F16	BOM.NO:13926
Sample NO.		

SECOMP

Drawings of 1 (2) | Proportion: 1:1 | Unit(mm) | A4