


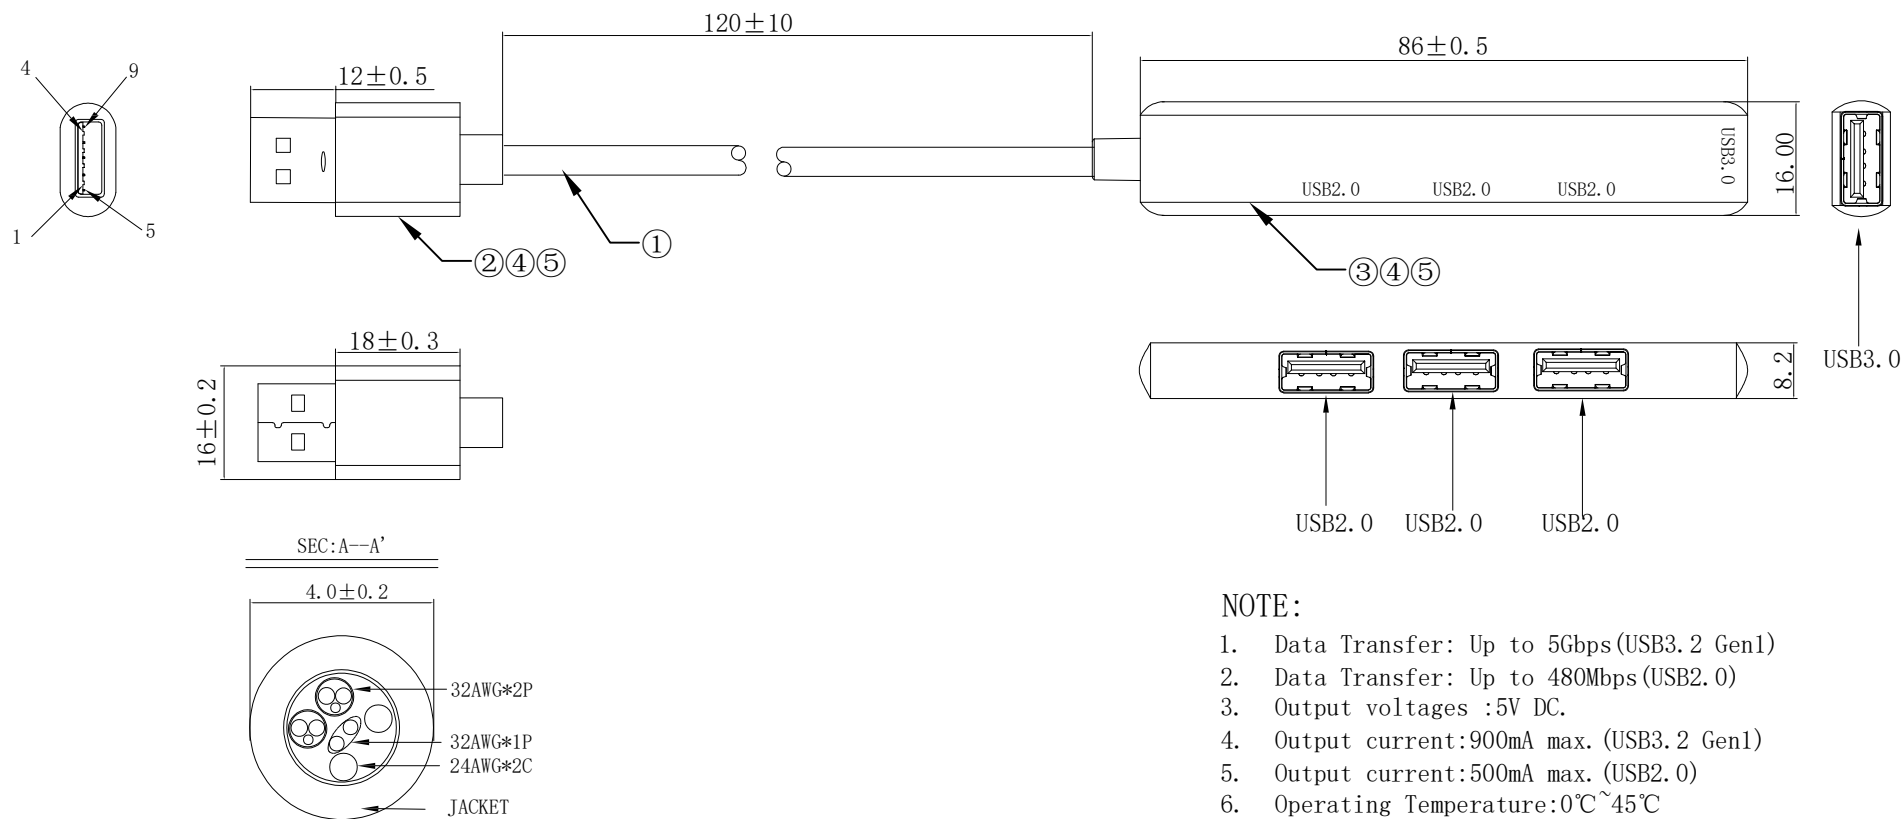

- NOTE:
1. Data Transfer: Up to 5Gbps(USB3.2 Gen1)
 2. Data Transfer: Up to 480Mbps(USB2.0)
 3. Output voltages :5V DC.
 4. Output current:900mA max. (USB3.2 Gen1)
 5. Output current:500mA max. (USB2.0)
 6. Operating Temperature:0℃~45℃
 7. Storage Temperature:-20℃~ 70℃
 8. RoHS 2.0 and REACH compliant

MATERIAL LIST:

⑤	MOULD	40P PVC BLACK	2	
④	HOUSING	ALUMINUM GREY	2	
③	CONNECTOR 2	USB2.0*3+USB3.0+PCBA, THE PIN GOLD PLATED, BLUE PBT INSULATION, THE SHELL FOR NICKEL PLATED	1	
②	CONNECTOR 1	USB A/M , THE PIN GOLD PLATED, BLUE PBT INSULATION, THE SHELL FOR NICKEL PLATED	1	
①	CABLE	(32AWG*1P+AL+MY)*2C+32AWG*1P+24AWG*2C+AL PVC/BLACK OD=4.0±0.2mm	L±T	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
Gao	Arvin	CHANGE THE ITEM NO.⚠	2025-12-09	A1
		NEW	2022-09-21	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

⚠

11.55.3018	Standard USB 4-in-1 Hub, Type A Male - 4x Port A Female
ITEM NO.	DESC.

SECOMP