


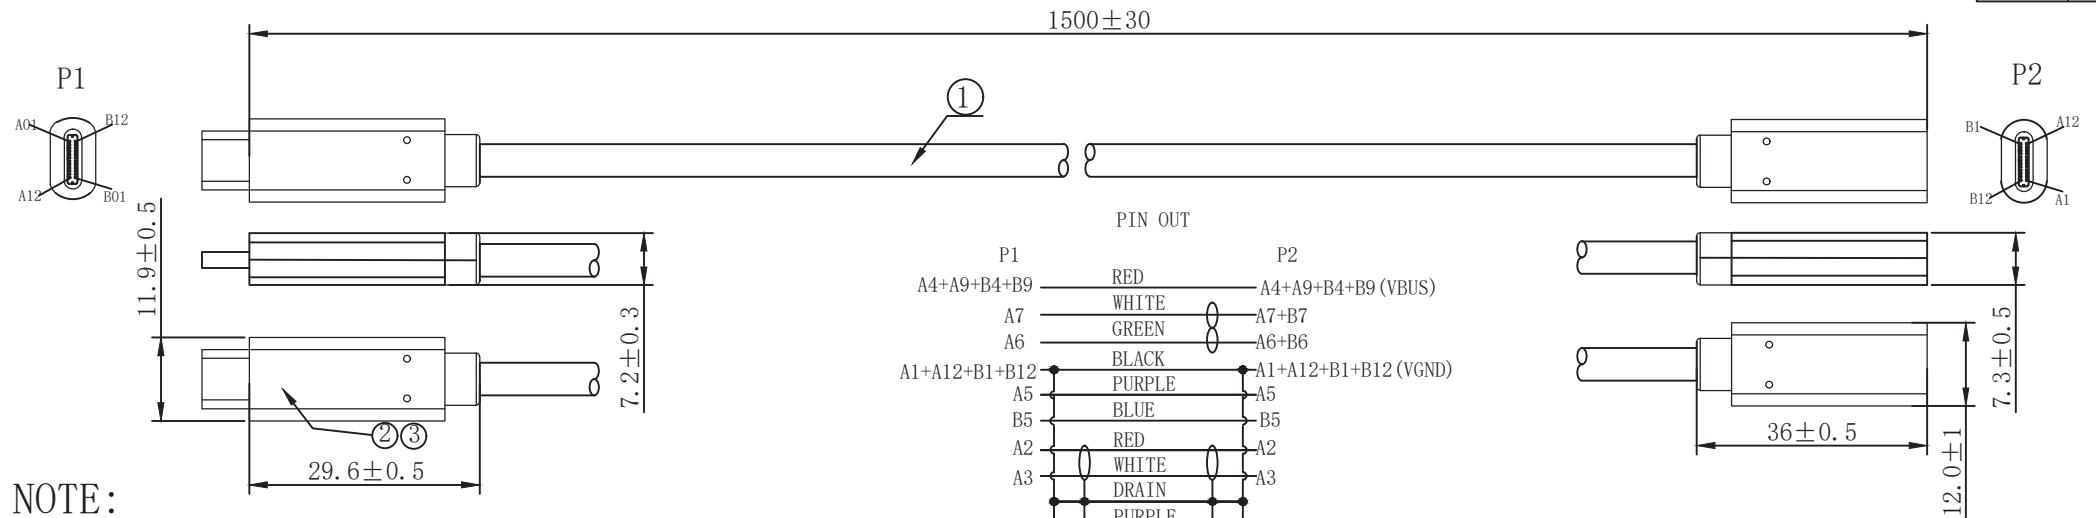

NOTE:

- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance:DC 300V 10M ohm;
 - Contact resistance:3 ohm;
- RoHS 2011/65/EU and amendment directives (EU) 2015/863 compliant; REACH 1907/2006/EC compliant.
- PRINTING: SUPER HIGH SPEED USB 3.2 CABLE
- Current Rate:60W/3A max
- Data Transfer: 20 Gbps
- Operating Temperature: $0^{\circ}\text{C} \sim 45^{\circ}\text{C}$
- Storage Temperature: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$

MATERIAL LIST:

④	OUTER MOLD	PVC color For black	1	
③	USB C TYPE	USB C/F Solder Type,Black PBT Insulation,The Pin Gold Plating, the shell for Nickel Plating	1	
②	USB C TYPE	USB C/M Solder Type,Black PBT Insulation,The Pin Gold Plating, the shell for Nickel Plating	2	
①	CABLE	USB 3.2 CABLE [1P*32AWG+D+AL+MY]*4C+1P*32AWG+4C*32AWG+2C*22AWG+F+AL+B PVC BLACK Jacket, OD:4.5±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	2025-04-01	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

11.99.5496	VALUE USB 3.2 2X2 CM/CF EXT. Cable, 20G, 60W, 1.5M, Video Only,Black
ITEM NO.	DESC.

SECOMP