



Datenblatt - Fiche technique - Data sheet


**11.99.5537**



VALUE Monitorkabel HDMI High Speed, ST-ST, 3,0 m

VALUE Câble de raccordement pour écran HDMI High Speed M-M, 3,0 m

VALUE HDMI High Speed Cable, M/M, 3.0 m

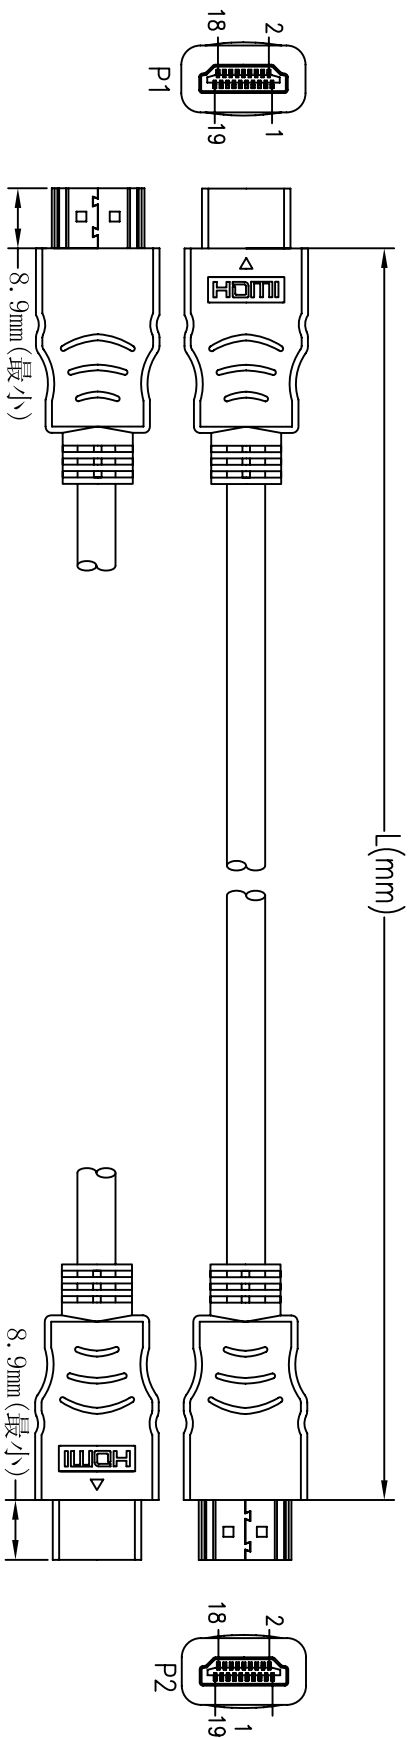

PIN OUT

P1	P2		
1	1	BLUE	RED
3	3	WHITE	AM
5	5	DRAIN	AM
4	4	BLUE	SILVER
6	6	WHITE	AM
2	2	DRAIN	AM
7	7	BLUE	BLUE
9	9	WHITE	AM
11	11	DRAIN	BROWN
10	10	BLUE	
12	12	WHITE	
8	8	DRAIN	
13	13	GREEN	
14	14	PURPLE	
15	15	YELLOW	
16	16	ORANGE	
17	17	RED	
18	18	WHITE	
19	19	BLUE	

P/N表

P/N	L
11.99.5526	1000±30mm
11.99.5527	2000±50mm
11.99.5537	3000±70mm
11.99.5557	5000±70mm

NOTES:

1. MATERIAL

- 1.1 HDMI CABLE: (7/0.1BC\*1P+7/0.1CCS+AM)\*4PCS+7/0.10CCS\*5C+7/0.10CCS\*1P +AM+7/0.12CCS+128/0.12ALM+BLACK PVC JACKET.

OD:  $\varnothing 6.0 \pm 0.2$  mm

CABLE MARKING: E324703 **AWM** STYLE 20276 80°C 30V

HIGH SPEED HDMI® CABLE

- 1.2 HDMI TYPE A MALE: BLACK INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- 1.3 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL

- 2.1 100% OPEN AND SHORT TEST.
- 2.2 CONDUCTOR RESISTANCE: 15 OHMS MAX.
- 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.
- 2.4 HDTV-DVD TEST: 1080P.

3. PACKAGING: A PC/PE-BAG.
4. ALL MATERIALS ARE ROHS & REACH COMPLIANT.

**SECCOMP**

PRODUCT NO:

CUSTOMER NO:

ENG: Zhy

CHECKED: Yiko

DRAWING NO:

PRODUCT DESCRIPTION:

HDMI AM/AM/NICKEL-PLATED

APPROVED: Sally

NEW ISSUE

2016-04-01

DATE

MODIFY DESCRIPTION

LENGTH TOLERANCE:

X. ± 0.5
.X ± 0.2
.XX ± 0.1

ANGLE TOLERANCE:

X° ± 3'
.X° ± 1'

SCALE: FREE

CUS. NAME:

UNIT: mm

VERSION: 00

PAGE: 1/1

1/1

DRAWING NO: HP2114

PRODUCT DESCRIPTION: HDMI AM/AM/NICKEL-PLATED

CUSTOMER NO:

APPROVED: Sally

A

B

C

D

E

7

6

5

4

3

2

1

A

B

C

D

E

1

2

3

4

5

6

7

8

9

10