

**NOTE:**

**1. Electrical test:**

- (1). 100% open short & miss wire test
- (2). Insulation resistance: DC 200V 10M ohm
- (3). Contactor resistance: 3 ohm
- (4). Dielectric strength: 300V AC/Sec, 2mA

2. Support Ultra HD 8K 7680 × 4320@60Hz, 10K 10240 × 4320@30Hz, 4K 3840 × 2160@120Hz

3. Support dynamic HDR

4. RoHS 2.0 and REACH Compliant

5. Operation temperature: -10°C +60°C

6. Operation temperature: -10°C +60°C



7. Marking: Ultra High Speed HDMI™ Cable with Ethernet E\*\*\*\*\* AWM STYLE 20276 80°C 30V VW-1

**MATERIAL LIST:**

⑤	HOUSING	ABS Silver color	2PC	
④	OVER MOLDING	PVC 85A Black	2PC	
③	CONN. SHIELD	Iron Shell Shield	2PC	
②	CONNECTOR	19P A/M, Crimping Type, Black insulation, Gold Plated Pin & Shell	2PC	
①	CABLE	HDMI (30AWG BC*1P+E+A+Mvlar)*5+(30AWG BC)*4+AEB Jacket: PVC, black OD: 5.5±0.2mm	1PC	

No.	Parts Name	Specification Description	Q'ty	Remark
		NEW	2019-06-18	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

**PIN OUT**

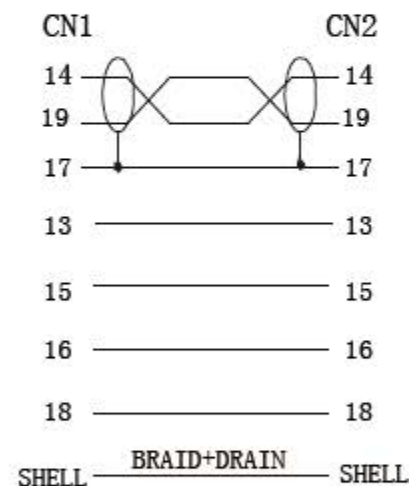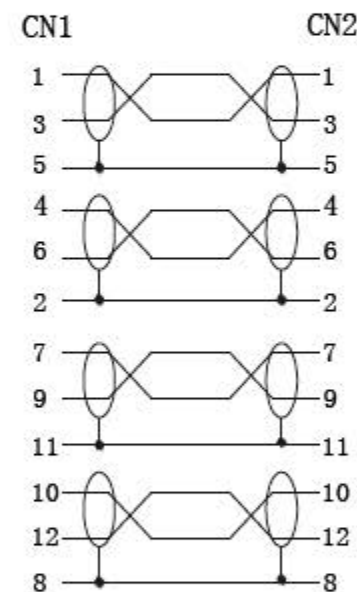

Item No.	Length
11.99.5940	1000 ± 20 mm
11.99.5941	1500 ± 30 mm
11.99.5942	2000 ± 30 mm

DESC. VALUE HDMI UHD Cable, 10K, Dynamic HDR, M/M, black

**SECOMP**