
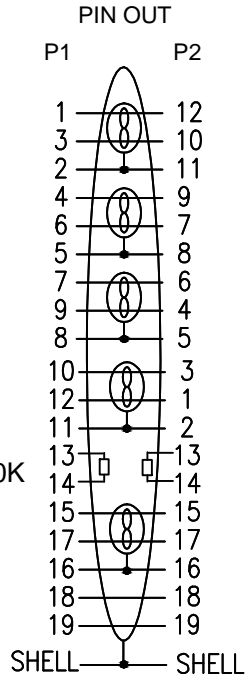
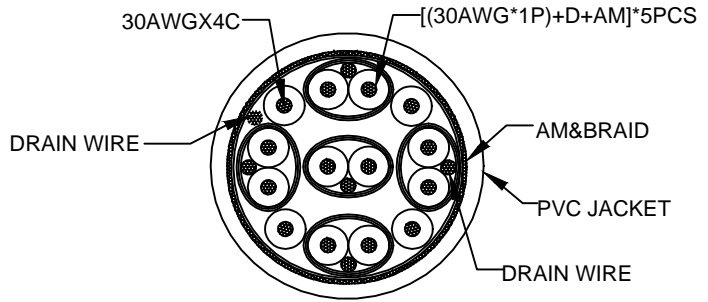


CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A0		2024/06/17	
A1	ADD LASER	2025/03/13	

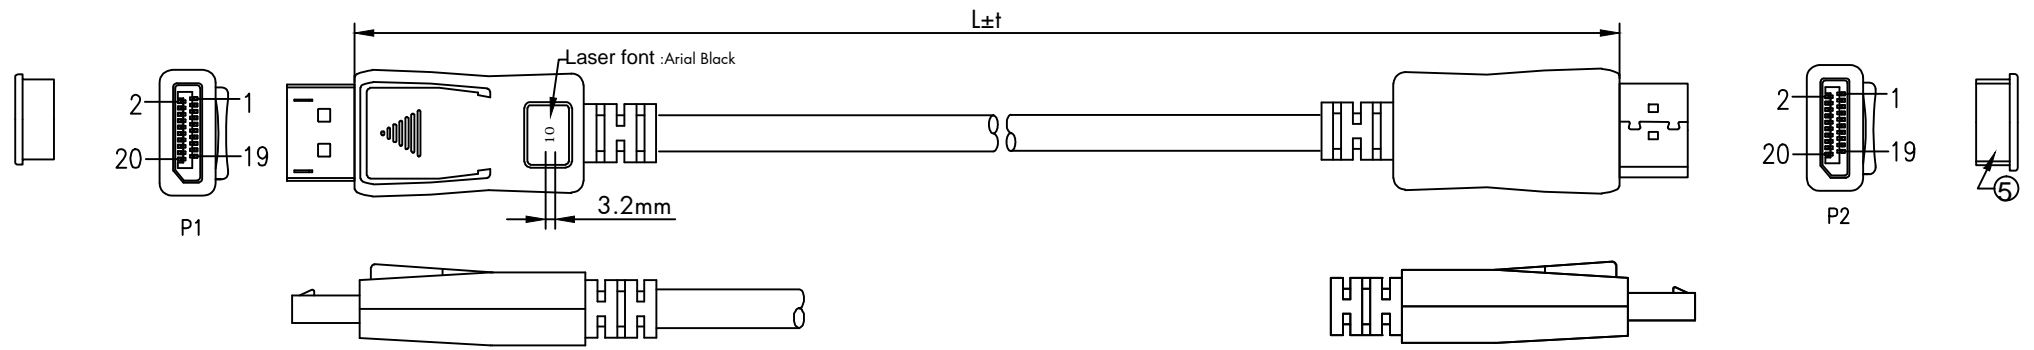

NOTE:
 1. Tested by TotalPhase Advanced Cable Tester V2 for DP2.1(40G) 10Gbps/lane UHBR10
 2. Tested by PC:3840*2160@120Hz 4:4:4 12bit
 3840*2160@60Hz 4:4:4 12bit
 3. Printing: High Speed Cable 20276 80 C 30V VW-1
 RoHS2.0(2011/65/EU) AND (2015/863/EU) WITH REACH COMPLIANT

ITEM NO	LENGTH
11.99.6020	1000±20
11.99.6022	2000±30
11.99.6023	3000±30

NO.	PART NAME	DESCRIPTION	QUANTITY	REMARKS
⑤	DUST COVER	TRANSPARENT PE	2	
④	BOOT	PVC, BLACK	2	
③	OUTER MOLD	ABS ,BLACK	2	
②	DP MALE	DP2.1 MALE, WITH LOCK, BLACK INSULATION, GOLD PLATED PIN AND SHELL	2	
①	CABLE	(30AWG/1 BC*1P+D+AM)*5+30AWG/1 BC*4+AM +D+BRAID AL-MG, JACKET: PVC /BLACK ,OD6.0±0.2MM	1	

NAME	VALUE DP 2.1 Cable, UHBR10, 40G, 10K, DP-DP M/M		
Item no.	See the chart		
SECOMP	MAPE	TOLERANCE	
		X.	±1.00
		X.X	±0.50
DRAW BY	SCALE	MM	
	PAGE	1/1	