


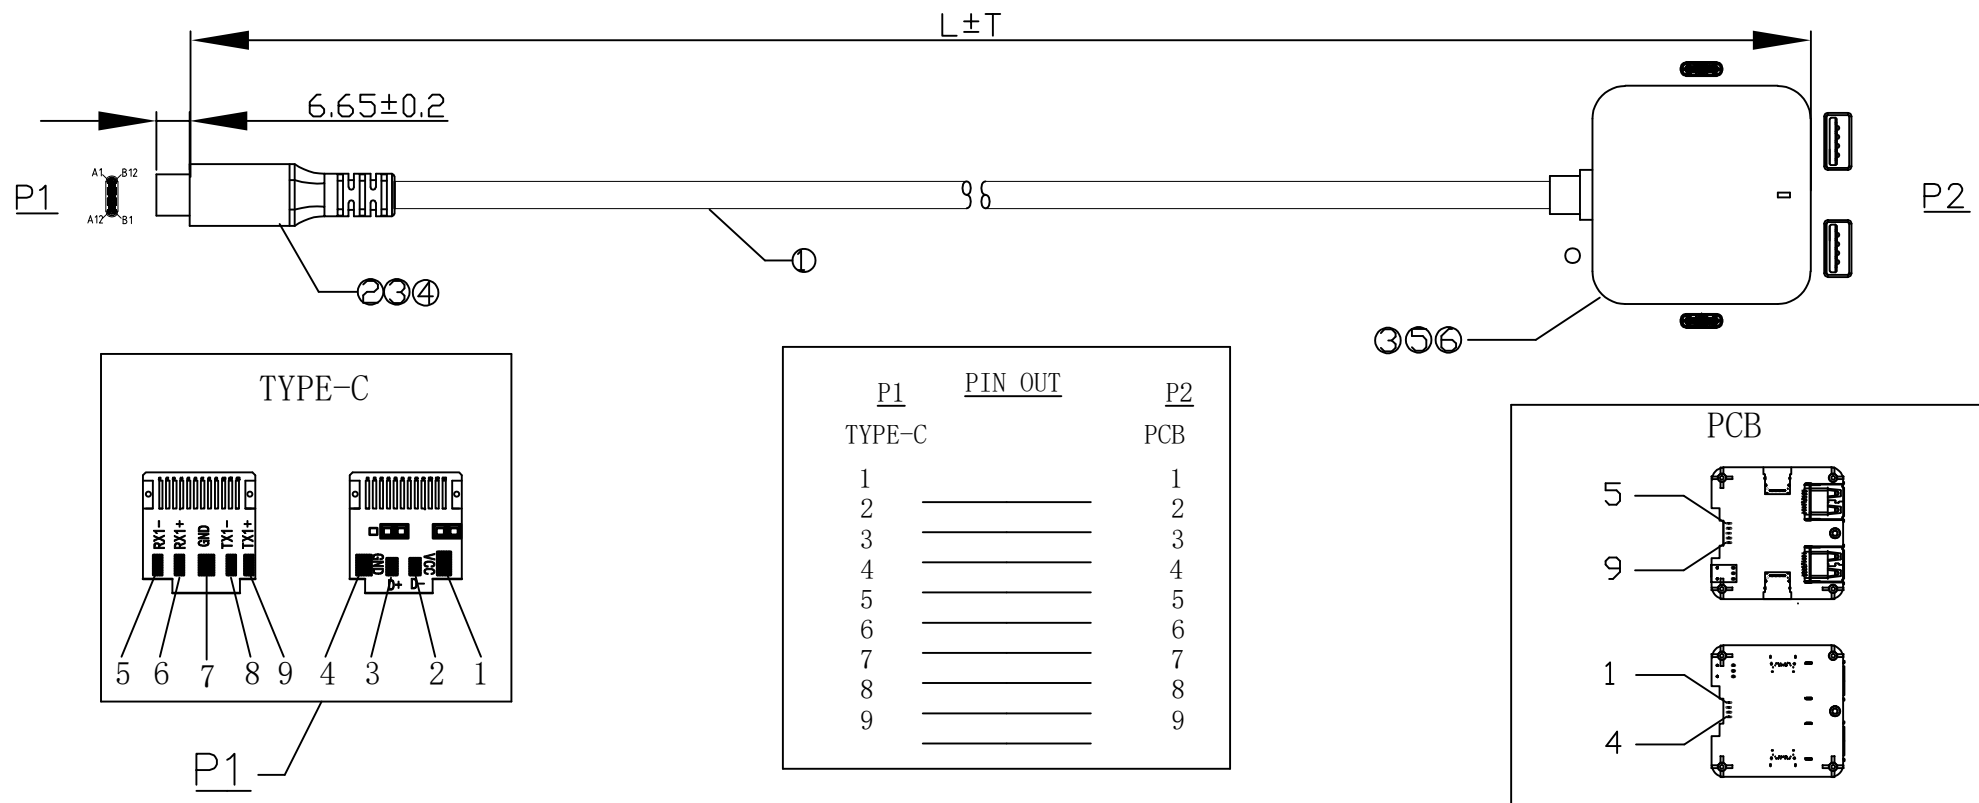

MATERIAL LIST:

⑥	PCBA	Type C male-2port A Female and 2port Type C Female	1	
⑤	Connector 2	USB3.2 2ports A Female and USB3.2 2ports Type C Female with DC, The PIN Gold Plated ,The Shell For Nickel Plated	1	
④	Mould	45P Black	1	
③	Housing	Aluminium Gray	2	
②	Connector 1	USB 3.0 C/M, The PIN Gold Plated ,The Shell For Nickel Plated	1	
①	Cable	(26AWG×2C+D+AL+HM)*2C+28AWG*1P+ (22AWG+D)*1C+F+AB OD:6.00±0.15mm PVC black	L±T	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
		NEW	2024-08-01	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

NOTE:

- Data Transfer: Up to 10Gbps
- Output voltages :5V DC.
- Output current:900mA max. (external power supply max.4A)
- Backward compatible with USB2.0/1.1/1.0
- Operating Temperature:0℃~45℃
- Storage Temperature:-20℃~ 70℃
- RoHS and REACH Compliant

ITEM NO	Length
12. 99. 1126	3000±70
DESC.	ROLINE USB 3.2 HUB, 2XUSB-A+2XUSB-C W/USB CM CABLE-3M

SECOMP