


NOTE:

1. Display port 2.1 Mode
2. Supports bandwidth up to 54Gbps
3. 10240×4320@60Hz with DSC, 7680×4320@60Hz
4. 3840×2160@120Hz, 4:4:4 8bit, 3840×2160@144Hz, 4:4:4
5. Supports 3D/HDCP2.2/DPCP1.0/EDID/HDR10
6. Support multi-streaming
7. Operation temperature : 0°C--+50°C
8. Storage temperature : -20°C--+70°C
9. RoHS and REACH Compliant

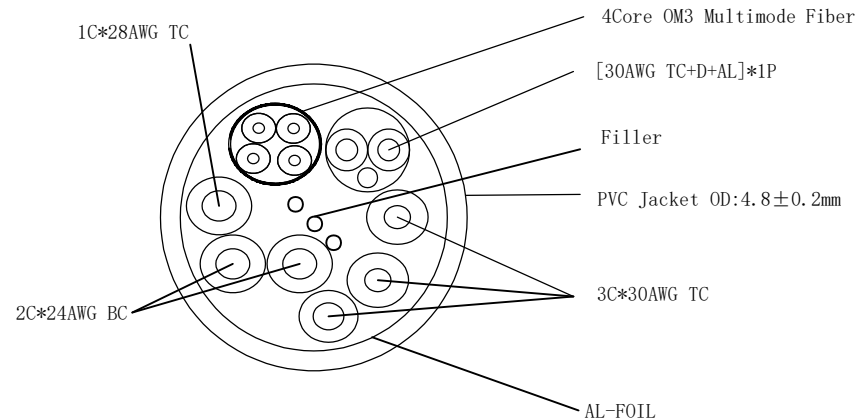

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
④	Moulding	BLACK PVC	2	
③	Housing	Zinc Alloy Black	2	
②	Connector	DP 20P/M WITH LATCHING SOLDER TYPE, BLACK INSULATION, THE PIN GOLD PLATED , THE SHELL FOR Gold PLATED	2	
①	Cable	4*OM3+30AWG TC*3C+24AWG BC*2C+28AWG TC*1C+(30AWG TC+D+AL)*1P+AL+fiber PVC OD:4.8±0.2mm black	L±T	
		NEW	2024-07-31	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

14. 01. 3504	ROLINE DisplayPort DP80 UHBR13.5 54GB AOC Cable L:50m
14. 01. 3503	ROLINE DisplayPort DP80 UHBR13.5 54GB AOC Cable L:30m
14. 01. 3502	ROLINE DisplayPort DP80 UHBR13.5 54GB AOC Cable L:20m
14. 01. 3501	ROLINE DisplayPort DP80 UHBR13.5 54GB AOC Cable L:15m
ITEM NO.	DESC.

**SECOMP**