

Bild / Picture

Anwendung / Application



14-in-1 USB-C Dockingstation


Beschreibung

Die EX-1226HM ist eine USB-C Dockingstation mit zwei HDMI- und einem DisplayPort-Anschluss mit jeweils 4K@60Hz, mehreren USB-A und USB-C Ports, Netzwerkanschluss und Kartenleser.

Ausserdem unterstützt sie USB-PD mit bis zu 100W zum Anschluss des USB-C Netzteils des Notebooks oder MacBooks wodurch diese gleichzeitig geladen werden.

Merkmale

- 14-in-1 Dockingstation mit elegantem Aluminiumdruckguss-Gehäuse
- Unterstützt USB-C Power Delivery (PD) Ladefunktion bis 100W
- 2x HDMI 4K@60Hz und 1x DisplayPort (DP) 4K@60Hz
- Unterstützt Multi Stream Transport (MST) für bis zu 3 Bildschirme mit unterschiedlichen Inhalten (MacOS: nur gleicher Inhalt möglich)
- Gigabit Ethernet RJ45-Port
- USB 3.2 Gen 2x1 Ports: 1x USB-A, 2x USB-C
- USB 3.2 Gen 1 Ports: 2x USB-A
- Ein USB-2.0 Port
- Kombierter 3,5-mm-Audioanschluss für Kopfhörer und Mikrophon
- Kartenleser für SD/SDHC/SDXC und microSD/SDHC/SDXC
- Für Notebooks/MacBooks mit USB-C Anschluss

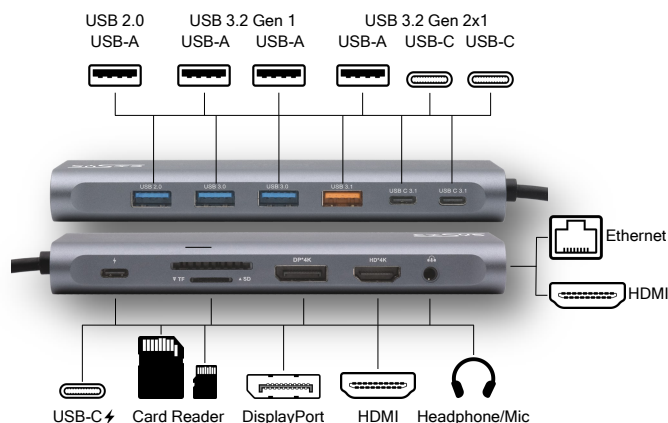

14-in-1 USB-C Docking Station

Description

The EX-1226HM is a USB-C docking station featuring two HDMI and one DisplayPort connection, each supporting 4K@60Hz. It also offers several USB-A and USB-C ports, a network connection, and a card reader.

It also supports USB-PD with up to 100W, enabling the USB-C power supply unit of a notebook or MacBook to be connected and charged simultaneously.

Features

- 14-in-1 docking station with elegant aluminum alloy case
- Supports USB-C Power Delivery (PD) charging function up to 100W
- 2x HDMI 4K@60Hz and 1x DisplayPort (DP) 4K@60Hz
- Supports Multi Stream Transport (MST) for up to 3 screens with different content (MacOS: only same content possible)
- Gigabit Ethernet RJ45 port
- USB 3.2 Gen 2x1 ports: 1x USB-A, 2x USB-C
- USB 3.2 Gen 1 ports: 2x USB-A
- One USB 2.0 port
- 3.5 mm combined audio port: headphone and microphone
- Card reader for SD/SDHC/SDXC and microSD/SDHC/SDXC
- For notebooks/MacBooks with USB-C connection

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Datentransfer-Rate:	120Mbps bis 10Gbps	Data transfer rate:	120Mbps up to 10Gbps
Anschlüsse:	1x USB-C Stecker Upstream 1x USB-C Buchse Power (PD) 100W 2x USB 3.2 Gen 2x1 C-Buchse 10 Gbit/s 1x USB 3.2 Gen 2x1 A-Buchse 10 Gbit/s 2x USB 3.2 Gen 1 A-Buchse 5 Gbit/s 1x USB 2.0 A-Buchse 2x HDMI 4K@60Hz 1x DisplayPort 4K@60Hz 1x Gigabit Ethernet RJ45 1x 3.5 mm Klinke Kopfhörer/Mikrofon 1x SD-Slot, 1x micro SD-Slot	Connectors:	1x USB-C male Upstream 1x USB-C female Power (PD) 100W 2x USB 3.2 Gen 2x1 C female 10 Gbps 1x USB 3.2 Gen 2x1 A female 10 Gbps 2x USB 3.2 Gen 1 A female 5 Gbps 1x USB 2.0 A female 2x HDMI 4K@60Hz 1x DisplayPort 4K@60Hz 1x Gigabit Ethernet RJ45 1x 3.5 mm jack headphone/microphone 1x SD slot, 1x micro SD slot
Hardwaresysteme:	USB 3.2 Gen 2x1	Hardware system:	USB 3.2 Gen 2x1
Treiber:	Benötigt keine Treiber	Driver:	No driver necessary
Betriebssysteme:	Windows XP/Vista/7/8.x/10/11 (32&64-Bit) /CE/ Server (200x & 2012 R2), Linux, Mac OS 10.x	Operating systems:	Windows XP/Vista/7/8.x/10/11 (32&64-Bit) /CE/ Server (200x & 2012 R2), Linux, Mac OS 10.x
Betriebstemperatur :	0°C bis +55°C Celsius	Operating temperature :	32°F up to 131°F Fahrenheit
Lagertemperatur:	-20°C bis +85°C Celsius	Storage temperature:	-20°F up to 167°F Fahrenheit
Rel. Luftfeuchtigkeit:	5% bis 95%, nicht kondensierend	Rel. Humidity:	5% to 95%, non-condensing
Stromversorgung:	USB-C	Current Supply:	USB-C
Abmessung:	144.00 x 51.00 x 17.00 mm	Size:	144.00 x 51.00 x 17.00 mm
Gewicht:	120 g	Weight:	120 g
EAN:	4718359122613	EAN:	4718359122613
Ursprungsland:	China	Country of origin:	China
Lieferumfang:	EX-1226HM, Handbuch	Packaging contents:	EX-1226HM, Manual

Bilder / Picture

