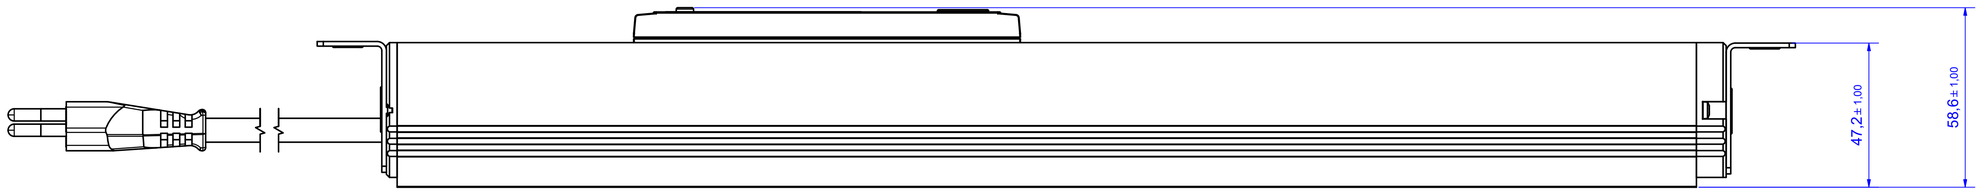

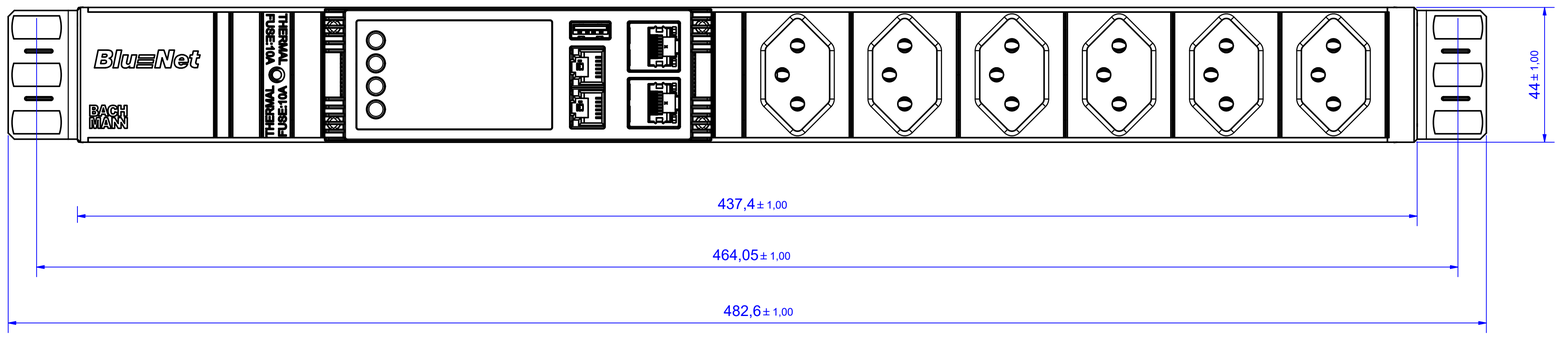

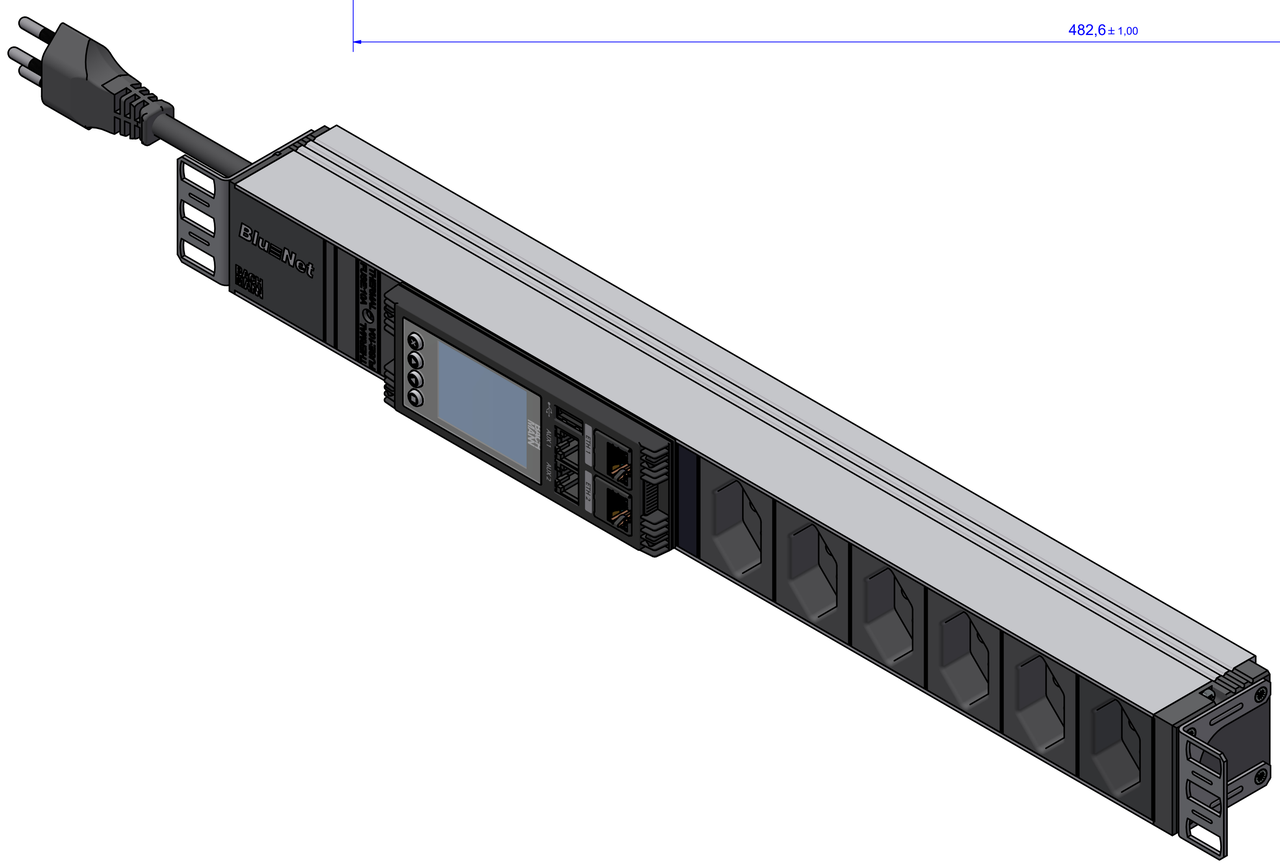

BN ESSENTIAL Metered
Messung pro Phase
Eingang: 10A/230V | 2.3kW
Thermosicherung 10A (rücksetzbar)
Ausgang: 6xCH T13 0° Steckdose
Zuleitung: 2.0m | 1.5mm²
mit T12 Stecker
Integrierte Funktion zur Messung von Strom, Spannung, Blind-, Schein-, Wirkleistung, Wirkenergie, Frequenz und Leistungsfaktor
Im Betrieb tauschbarer Controller
Integrierter Webserver mit Webinterface
2x 1Gbit/s Ethernetanschluss
1x USB-A Anschluss
2x Schnittstelle für Sensoren
2.0" TFT Farbdisplay
inkl. Haltewinkel;
mit BACHMANN Logo
Verpackt im Karton

BN ESSENTIAL Metered
Metering per Phase
Input: 10A/230V | 2.3kW
Thermal Fuse 10A (resettable)
Output: 6xCH T13 0° Socket
Supply cable: 2.0m | 1.5mm²
with T12 plug
Integrated function for measuring current, voltage, reactive, apparent and active power, active energy, frequency and power factor
Hot-swappable controller
Integrated web server with web interface
2x 1Gbit/s Ethernet connection
1x USB-A port
2x Interface for sensors
2.0" TFT color display
incl. mounting brackets
with BACHMANN logo
Packed in carton

Werkstoff / Material:	Gewicht / Weight: -	Oberfläche / Surface:	
	Bezeichnung / Title: BN ESSENTIAL Metered		
Datum / Date: 30.07.2025	Name: sc		
Freigabe / Approval:			
Zeichg.Nr / Draw.-No:			
Art.Nr. BM0026860	Maßstab / Scale: 1 : 1	Format / Draw.-Size: A1	Blatt / Sheet: 1

Status / Stage | Änderungen / Changes | Datum / Date | Name / Name

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmacksmustereintragung vorbehalten.

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.