


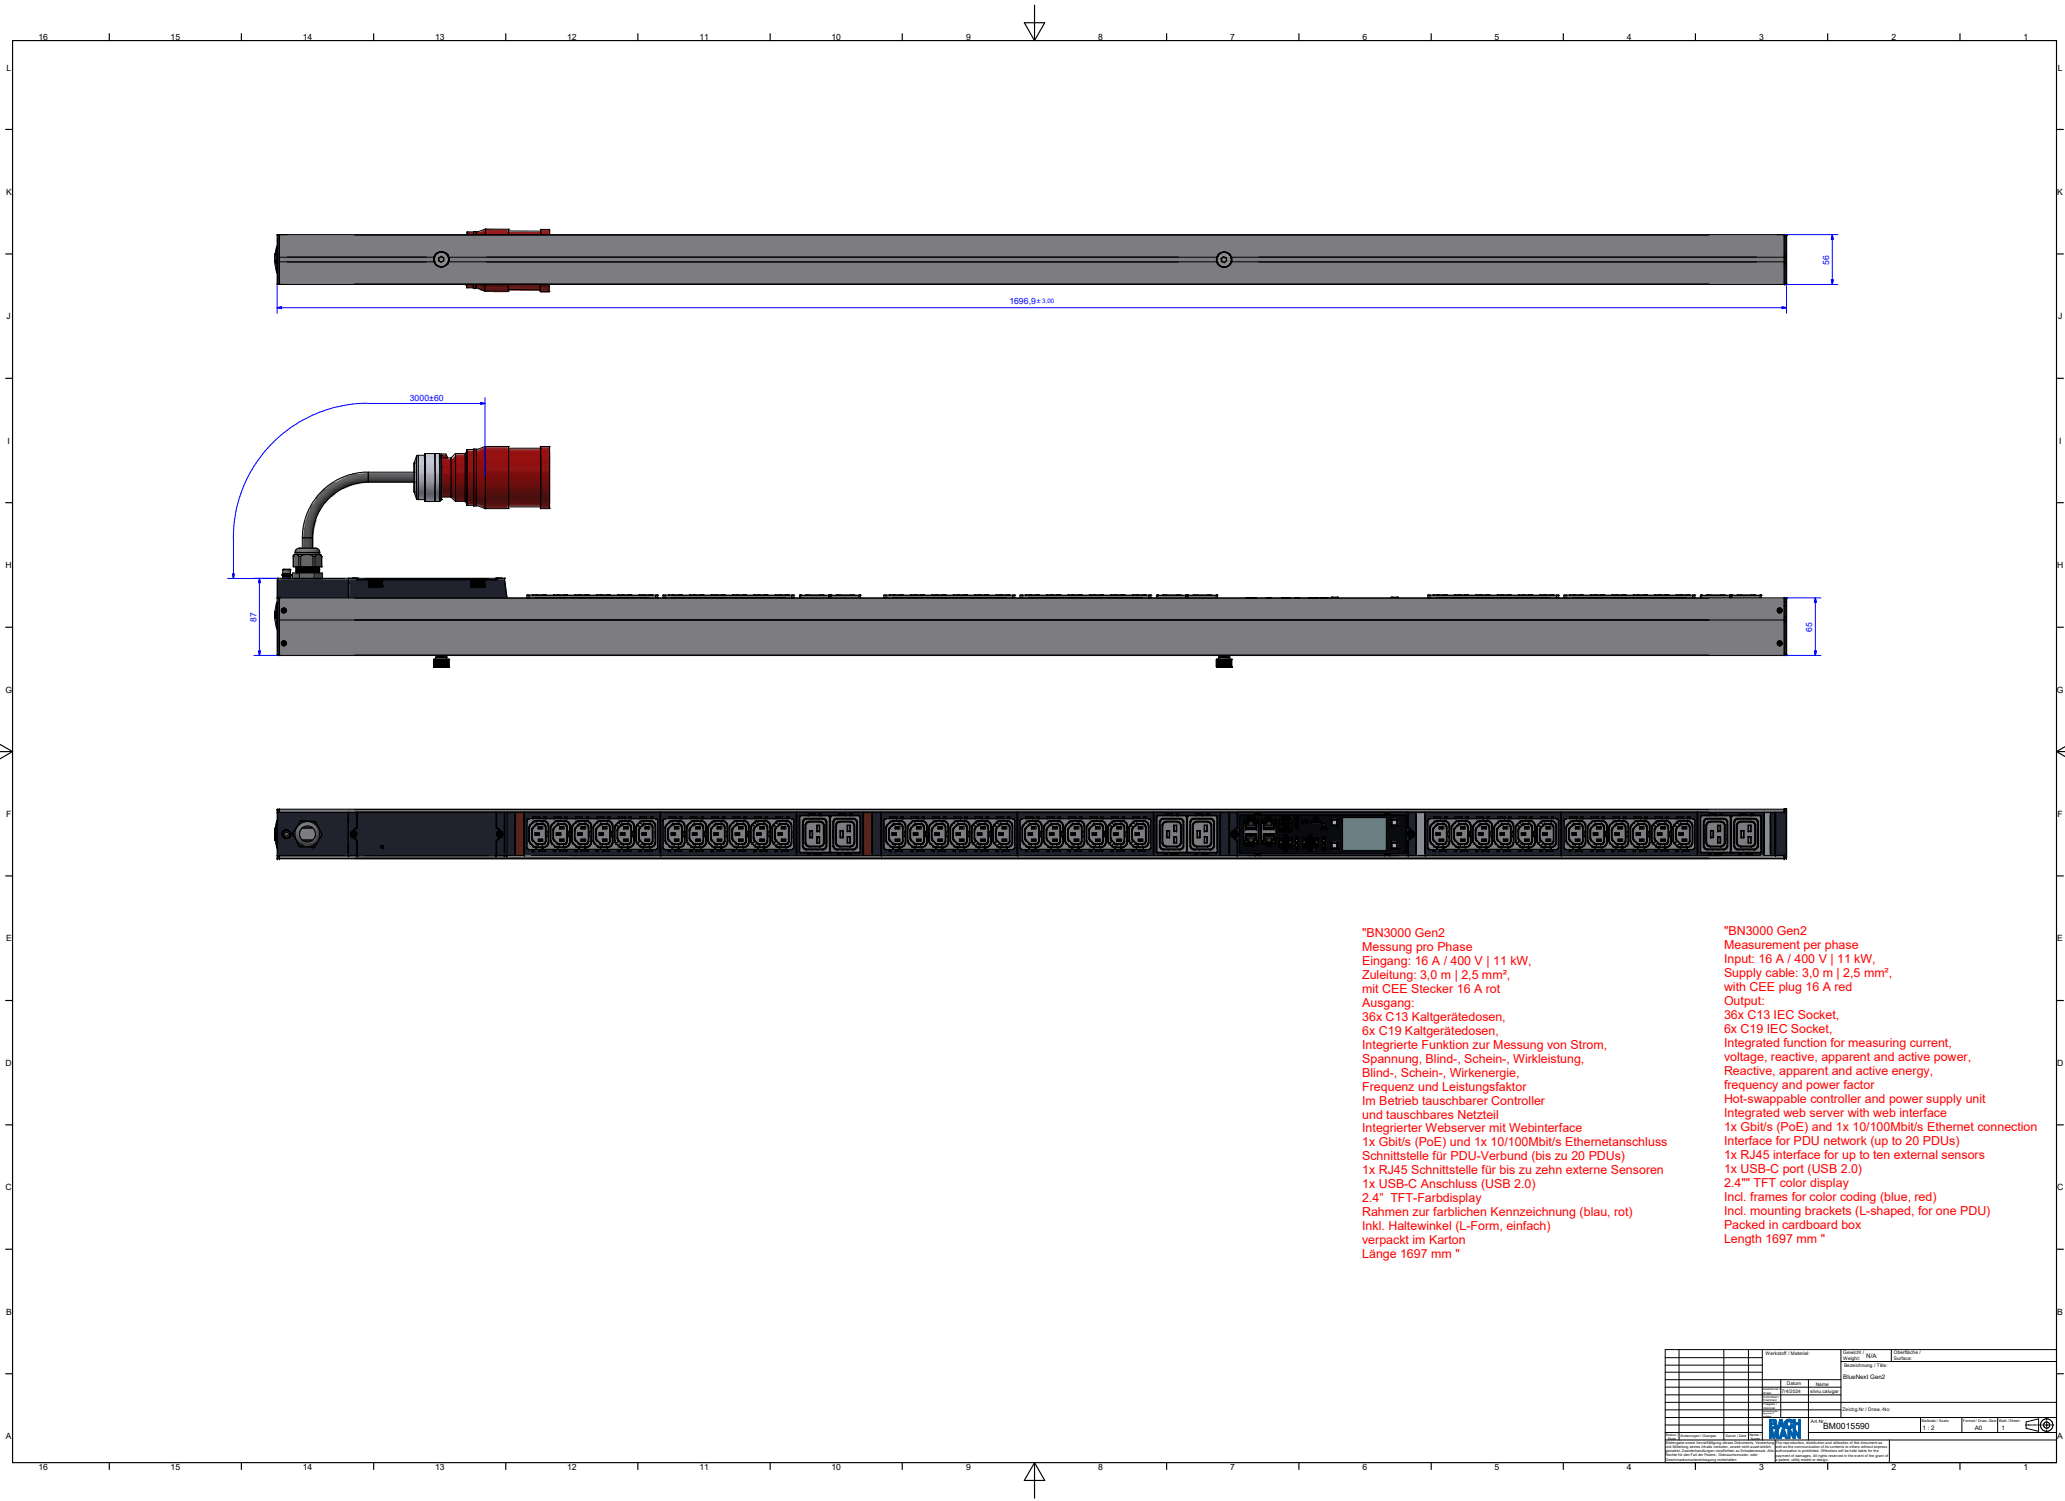

"BN3000 Gen2
Messung pro Phase
Eingang: 16 A / 400 V | 11 kW,
Zuleitung: 3,0 m | 2,5 mm²,
mit CEE Stecker 16 A rot
Ausgang:
36x C13 Kaltgerätedosen,
6x C19 Kaltgerätedosen,
Integrierte Funktion zur Messung von Strom,
Spannung, Blind-, Schein-, Wirkleistung,
Blind-, Schein-, Wirkenergie,
Frequenz und Leistungsfaktor
Im Betrieb tauschbarer Controller
und tauschbares Netzteil
Integrierter Webserver mit Webinterface
1x Gbit/s (PoE) und 1x 10/100Mbit/s Ethernetanschluss
Schnittstelle für PDU-Verbund (bis zu 20 PDUs)
1x RJ45 Schnittstelle für bis zu zehn externe Sensoren
1x USB-C Anschluss (USB 2.0)
2,4" TFT-Farbdisplay
Rahmen zur farblichen Kennzeichnung (blau, rot)
Inkl. Haltewinkel (L-Form, einfach)
verpackt im Karton
Länge 1697 mm *

"BN3000 Gen2
Measurement per phase
Input: 16 A / 400 V | 11 kW,
Supply cable: 3,0 m | 2,5 mm²,
with CEE plug 16 A red
Output:
36x C13 IEC Socket,
6x C19 IEC Socket,
Integrated function for measuring current,
voltage, reactive, apparent and active power,
Reactive, apparent and active energy,
frequency and power factor
Hot-swappable controller and power supply unit
Integrated web server with web interface
1x Gbit/s (PoE) and 1x 10/100Mbit/s Ethernet connection
Interface for PDU network (up to 20 PDUs)
1x RJ45 interface for up to ten external sensors
1x USB-C port (USB 2.0)
2.4" TFT color display
Incl. frames for color coding (blue, red)
Incl. mounting brackets (L-shaped, for one PDU)
Packed in cardboard box
Length 1697 mm *

		Werkstoff / Material		Version / N/A		MonteDate / Koffein	
				BlueNext Gen2			