
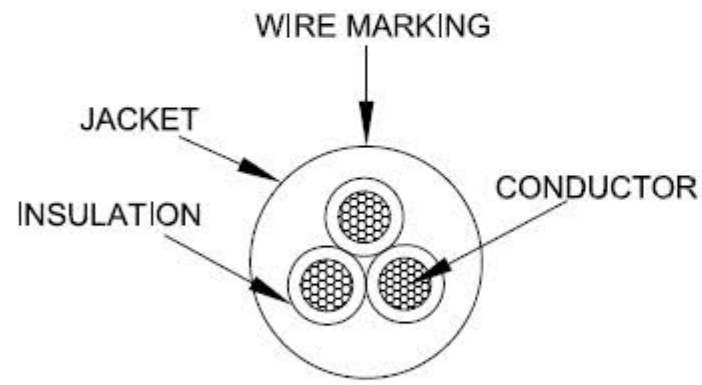


7	8	9	10
DATE	REV	DESCRIPTION	BY
2019.3.15	A/0	NEW	LTY

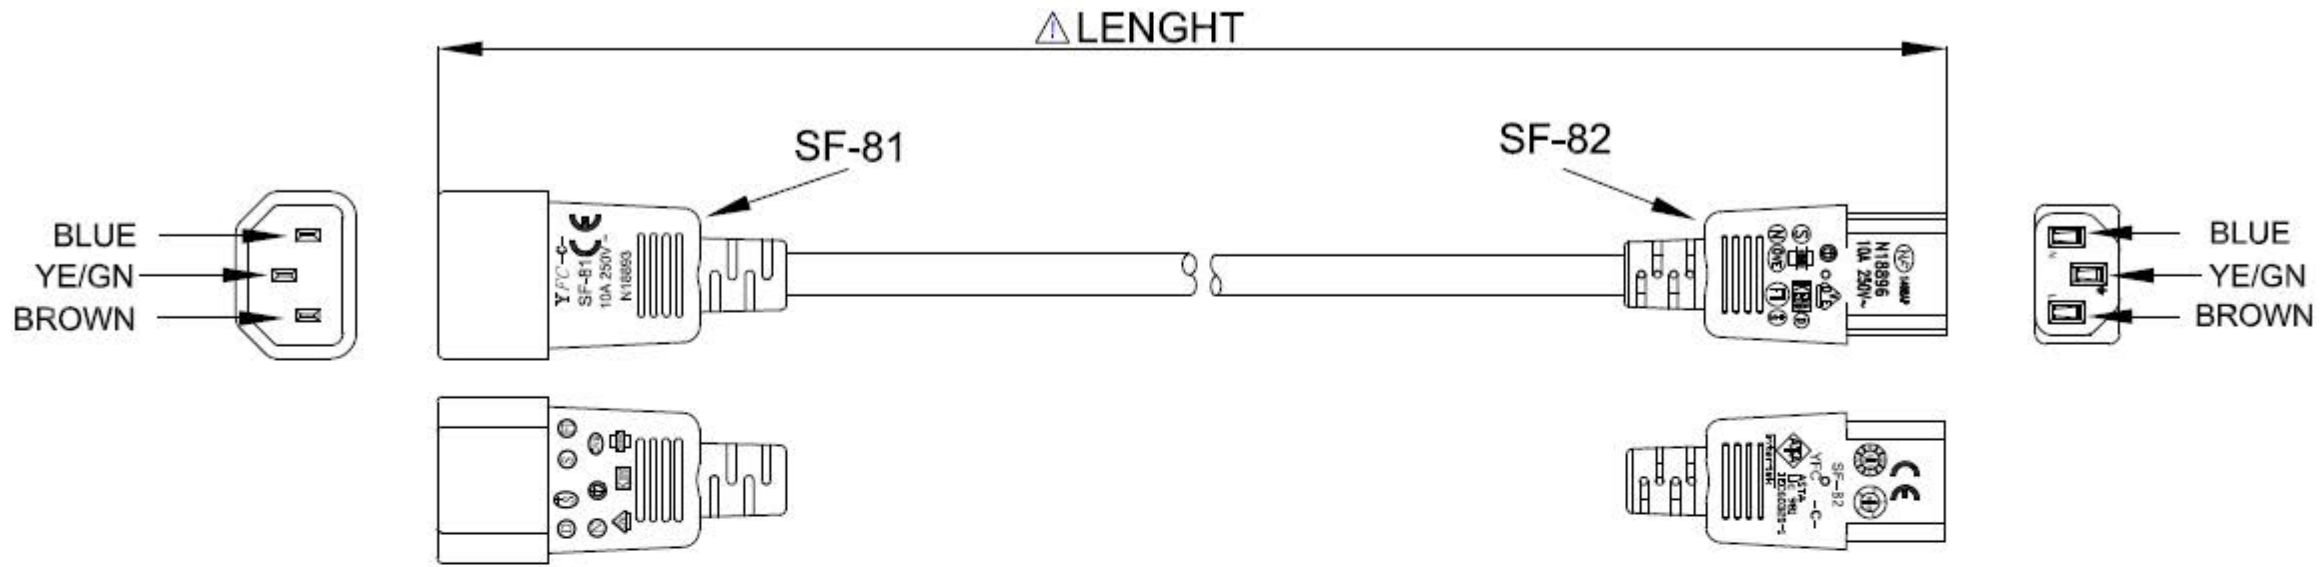

ITEM NO.	LENGTH	COLOR
19.08.1525	800±20 mm	RED
19.08.1526	800±20 mm	YELLOW
19.08.1527	800±20 mm	BLUE
19.08.1528	800±20 mm	GREEN

**REMARKS:**  
 1.DVW TEST:2000VAC,1S  
 2.POLARIZATION AND CONTINUITY TEST  
 3.PLUG (SF-81) RATED POWER:250V 10A  
 4.CONNECTOR (SF-82) RATED POWER:250V 10A  
 5.WIRE: H05VV-F 3G0.75mm<sup>2</sup> RATED VOLTAGE:300/500V

WIRE MARKING: (Hollow) NO.129		+ S + S + S KEMA-KEUR       CEBC 972 <VDE> NF-USE 1345 IEMMEQU H05VV-F 3G0.75MM <sup>2</sup> V-75 300/500V ORDINARY DUTY NSW17436 YFC BON-EAGLE							
Key Size		3RD		<b>SECOMP</b>					
Length (mm)	Tolerance								
	Critical	Normal	General	Desc.	ROLINE Power Cord, IEC320 C14/C13, 0.8m				
0-15	±0.05	±0.10	±1.0	UNIT	mm	APPROVAL	CHECKER	DRAWER	
15-60	±0.10	±0.20		PAGE	1/1		Qin Rao	LTY	
60-150	±0.15	±0.35	±1.5	Draw.No.					
150-350	±0.20	±0.50		±2.0					
350-1000	±0.40	±0.65							