


CONSTELLATION  
SERIES

## CURVED GLASS PANEL

Curved glass design with three-sided tempered glass for a wide panoramic view.

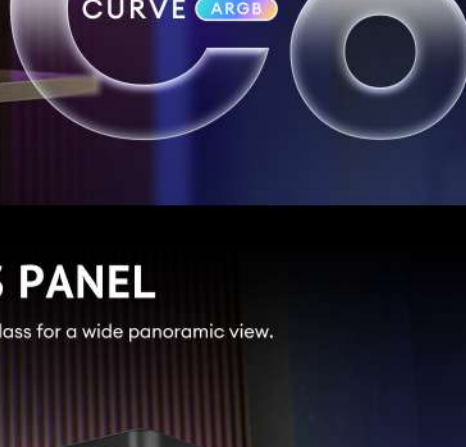

## VERTICAL COOLING

Supports up to 6 fans, with large area of vents around lower chamber, allowing for bottom-to-top vertical airflow.



## MULTI-DIRECTIONAL AIR INTAKE AND MASSIVE AIRFLOW

Fine mesh top panel combined with extensive ventilation on the front, left, right, and bottom ensures powerful and consistent airflow.



## BOTTOM AIR INTAKE OPTIMIZATION

Recessed dual fan mounts on the PSU shroud enhance bottom intake airflow.



55mm  
(max.)



## PRE-INSTALLED 2 X 120MM ARGB PWM REVERSE FANS &amp; 1 X 140MM ARGB PWM FAN

1X P14

140mm ARGB PWM fan



2 X P12 Reverse

120mm ARGB PWM fans



## RADIATOR SUPPORT

Supports installation of 360mm radiator on the top.



## SUPPORTS RTX 5090

The floating graphics card design prevents interference with side-mounted hardware.



## SUPPORTS BACK-CONNECT MOTHERBOARDS

Rear cable connections keep the front clean and create a smoother airflow path.

\*Supported models:  
ASUS TUF B760M-BTF WIFI D4,  
ASUS TX GAMING B760-BTF WIFI,  
ASUS DIX-APE B760 REVOLUTION,  
MSI B760M PROJECT ZERO,  
MSI B650M PROJECT ZERO,  
Colorful CVN B760M FROZEN WIFI V20,  
and more to come.




## TOOL FREE PANEL DESIGN



- The lower right and lower left feature detachable mesh panels secured by hooks.
- Side panels mount on studs with rear clip handles for quick, tool-free removal.
- The top panel is secured by studs for quick, tool-free installation.

## SIDE-MOUNTED PSU CHAMBER &amp; 13A EXTENSION CABLE

Equipped with a 13A high-spec extension cable for stable power delivery and high-wattage PSU support.

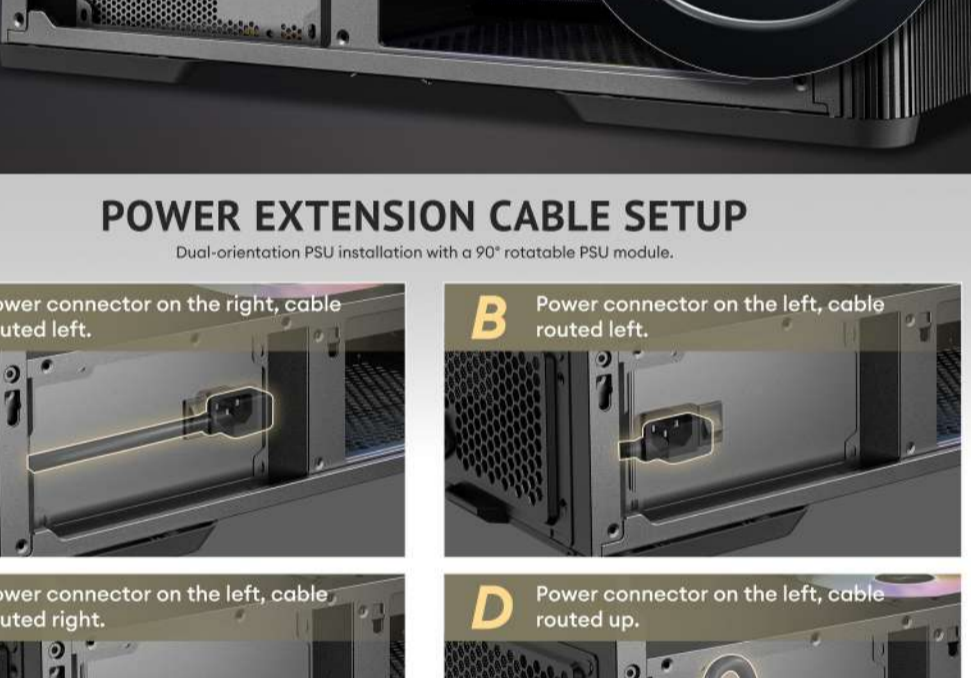

## POWER EXTENSION CABLE SETUP

Dual-orientation PSU installation with a 90° rotatable PSU module.



## INDIVIDUAL PCIE SLOT COVERS

Comes with 7 PCIe slot covers.



## I/O PANEL

- Power
- USB 3.0 x 2
- Type-C 10Gbps x 1
- Headphone/Mic Combo Jack




## ADVANCED DUST PROTECTION

Pull-out bottom dust filter plus a lower front dust filter for enhanced dust protection.




## EASY CABLE MANAGEMENT

Up to 30 mm routing space behind the motherboard, with 2 rubber grommets, 3 plastic cable clips, and 2 Velcro straps for a clean, organized build.

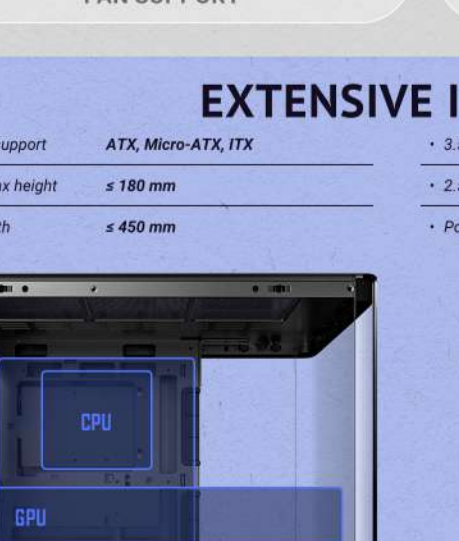


## COOLING COMPATIBILITY

Simultaneously supports 6 x 120mm fans.

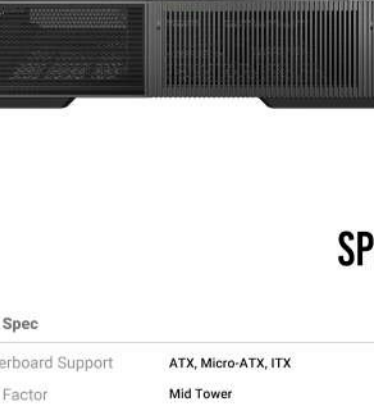

FAN SUPPORT

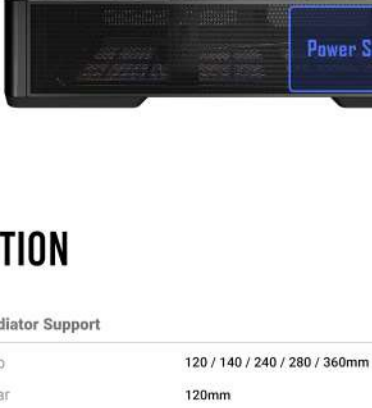

RADIATOR SUPPORT

## EXTENSIVE INTERIOR

- Motherboard support: ATX, Micro-ATX, ITX
- CPU cooler max height: ≤ 180mm
- GPU max length: ≤ 450mm



- 3.5"
- 1"
- 2.5"
- 1"
- Power Supply max length: Standard mounting (excluding cables) ≤ 150mm; Side mounting (excluding cables) ≤ 160mm



## SPECIFICATION

## Main Spec

Motherboard Support	ATX, Micro-ATX, ITX
Form Factor	Mid Tower
Case Material	Steel + Plastic + Glass
Side Window Material	4mm Tempered Glass
I/O Ports	Power, USB 3.0 x 2, Type-C 3.2 Gen 2 x 1 (10Gbps), Headphone / Mic Combo Jack
Case Dimensions (DxWxH)	480 x 235 x 470 mm
Box Dimensions (DxWxH)	540 x 548 x 290 mm

## Compatibility &amp; Clearances

CPU Cooler Max Height	≤ 180mm
GPU Max Length	≤ 450mm
Power Supply Max Length	Standard mounting (excluding cables) ≤ 150mm (For modular PSUs, the PSU chamber fan bracket must be removed.) Side mounting (excluding cables) ≤ 160mm

## Fan Support

Top	3 x 120mm / 2 x 140mm
Power Supply Shroud	2 x 120mm
Rear	1 x 120mm / 1 x 140mm
Included Fan(s)	2 x 120mm ARGB PWM reverse fans on the PSU shroud + 1 x 140mm ARGB PWM fan at the rear

## Radiator Support

Top	120 / 140 / 240 / 280 / 360mm
Rear	120mm

## Expansion Slots

Standard	7
----------	---

## Drive Bays

3.5"	1
2.5"	1

## General

Dust Filter	Front / Bottom
Net Weight	9.12 kg
Gross Weight	10.79 kg
Warranty	2 years
UPC#	0-761345-10287-2