


1 2 3 4 5 6

Total length (optional)

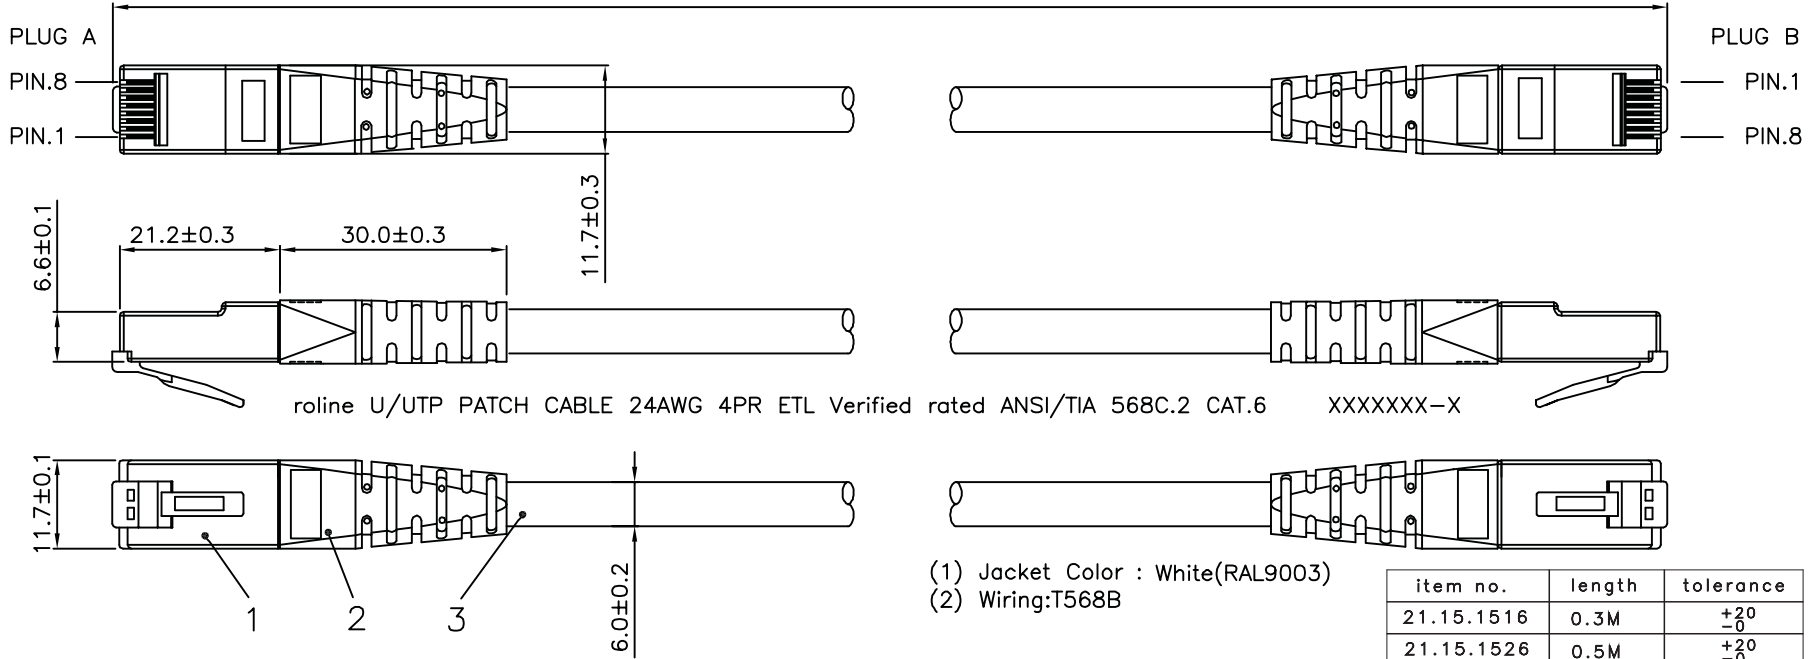

- (1) Jacket Color : White(RAL9003)
- (2) Wiring:T568B

item no.	length	tolerance
21.15.1516	0.3M	+20 -0
21.15.1526	0.5M	+20 -0
21.15.1536	1M	+20 -0
21.15.0929	1.5M	+20 -0
21.15.1546	2M	+20 -10
21.15.1556	3M	+20 -10
21.15.1566	5M	+30 -20
21.15.1576	7M	+30 -20
21.15.1586	10M	+30 -20
21.15.1596	15M	+30 -20
21.15.1606	20M	+70 -30

Specification :

- Material :
1. RJ45 Plug :
    - 1-1. Housing : Polycarbonate, Transparent color.
    - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
    - 1-3. Contact finished : Min. 50 micro-inch Gold plated.
  2. Molding: PVC.
  3. Cable :
    - 3-1. Jacket : PVC.
    - 3-2. Conductor : 24 AWG stranded copper.
    - 3-3. Isolation : PE.
    - 3-4. Isolation Cross Bar for 4 pairs : PE.
  4. Cable structure : U/UTP, 4 twisted pair with Cross Bar.
  5. Minimum Bending Radius: 50mm

item no	21.15.1516	21.15.1526	21.15.1536	21.15.0929	21.15.1546
	21.15.1556	21.15.1566	21.15.1576	21.15.1586	21.15.1596
Desc	ROLINE Cat 6 U/UTP Patch Cord,White				
"#": Matching DIM.	DRAWING	23.JuL.2016	byz		
"*": Important DIM.	CHECK	23.JuL.2016	Jane		
Others General DIM.	APPROVAL	23.JuL.2016	Jaimy		
GENERAL TOLERANCE OF DIMENSIONS		DATE	NAME		
X.XXX ±0.005	SCALE	1/1 (A4)	UNIT	mm	
X.XX ±0.05					
X.X ±0.1					
	DRAWING NO.		DRAWING CLASSIFICATION		
			S	SHEET	1 OF 1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

1 2 3 4 5 6 10cm