



Datenblatt - Fiche technique - Data sheet



**21.15.2515**



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, rot, 5,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, rouge, 5,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, red, 5.0 m

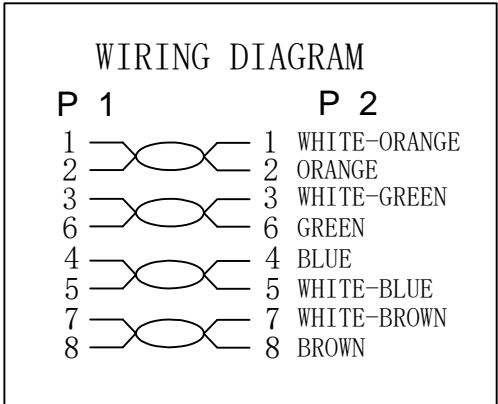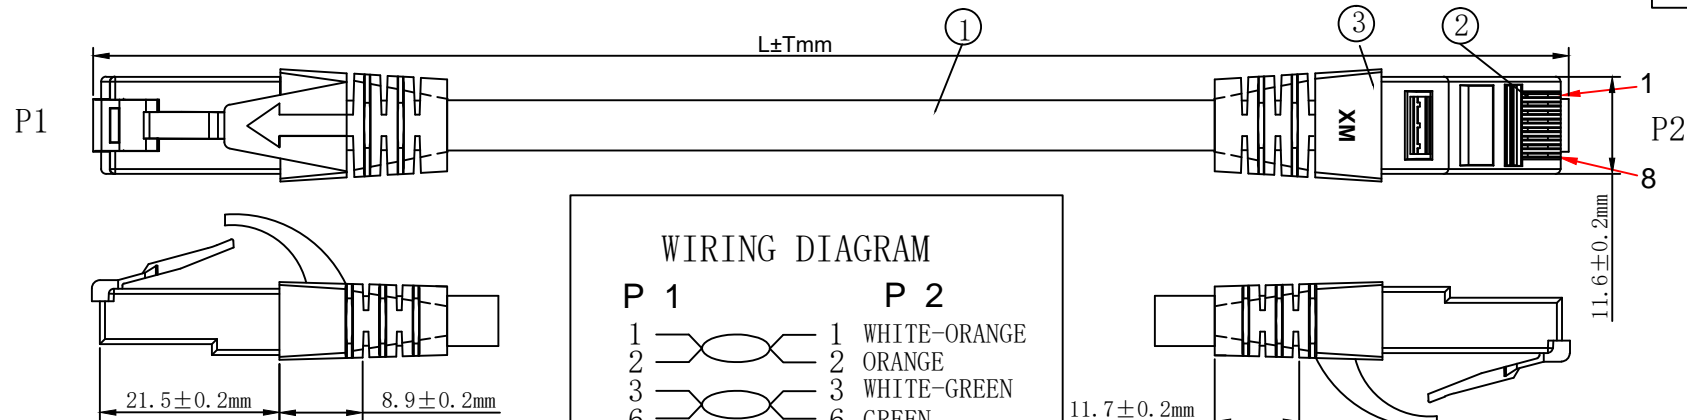

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius:50mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Red	2PCS	
②	CONNECTOR	RJ45 8P8C' S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR: Red (PANTONE: 199C)		
ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2941	300mm	±10mm
21. 15. 2510	500mm	±15mm
21. 15. 2511	1000mm	±30mm
21. 15. 2514	1500mm	±45mm
21. 15. 2512	2000mm	±60mm
21. 15. 2513	3000mm	±90mm
21. 15. 2515	5000mm	±150mm
21. 15. 2516	7500mm	±210mm
21. 15. 2517	10000mm	±300mm
21. 15. 2518	15000mm	±450mm
21. 15. 2519	20000mm	±600mm

ITEM NO.	21. 15. 2941	21. 15. 2510	21. 15. 2511	21. 15. 2512	21. 15. 2513
21. 15. 2514	21. 15. 2515	21. 15. 2516	21. 15. 2517	21. 15. 2518	21. 15. 2519
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, red				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-10-20	A

# SECOMP