



## Product Highlights

### True Gigabit Speed

Enjoy lightning-fast Gigabit speeds without the need for installing a new network card simply by using any available USB Type-C port on your device

### Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer files up to 10 times faster than with USB 2.0, at up to 5 Gbps

### Full-Resolution Video

HDMI video up to 4K @ 30 Hz Ultra HD resolution for stunning videos and images with no lag.



## DUB-M520

# 5-in-1 USB-C Hub with HDMI/Ethernet/Power Delivery

## Features

### Gigabit Ethernet Connectivity

- Achieve transfer speeds of up to 1 Gbps
- Status LEDs for connection status and data transfer speed
- Auto 10/100/1000 Mbps speed detection with auto-negotiation to always use the highest available speed

### HDMI Compatibility

- Ultra HD video resolution up to 4K @ 30 Hz
- Supports HDMI 1.4 and DisplayPort Alternate Mode over USB-C
- HDCP 2.2 compatible

### USB Type-C with Simple Installation


- Two USB 3.0 SuperSpeed 5 Gbps ports
- Backwards compatible with USB 2.0 and USB 1.1 devices
- Simply plug-and-play, no software required
- No additional hardware or software installation required

### Sturdy Aluminum Casing

- Strong aluminium alloy casing

The DUB-M520 5-in-1 USB-C Hub with HDMI/Ethernet/Power Delivery allows you to instantly add Gigabit Ethernet connectivity, a second display, and two additional USB 3.0 ports to your ultraportable computer. Just plug the DUB-M520 into an available USB Type-C port and you're ready to connect to the Internet with the reliability of a wired connection. You can also connect up to 2 more USB devices, as well as connect a second display, assuring that you don't have to solely rely on laggy wireless video streaming as an option to show things on a larger screen.

## Hardware Overview

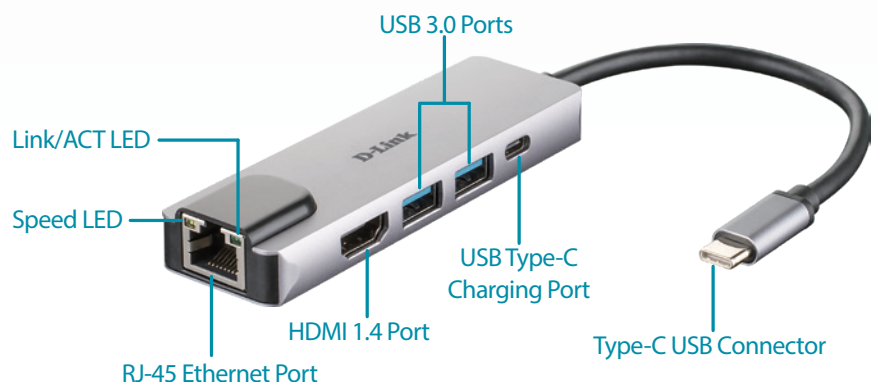

## 5-in-1 USB-C Hub with HDMI/Ethernet/Power Delivery

## Technical Specifications

## Connectivity

Device Interfaces	<ul style="list-style-type: none"> <li>• RJ-45 Ethernet Port (10/100/1000 Mbps)</li> <li>• Two USB 3.0 Type-A (female) Ports</li> <li>• HDMI Port (3840 x 2160 or 4096 x 2160 pixels @ 30 Hz)</li> </ul>	<ul style="list-style-type: none"> <li>• USB Type-C Port</li> <li>• USB Type-C Connector (Thunderbolt 3 compliant)</li> </ul>
LEDs	<ul style="list-style-type: none"> <li>• Speed (amber)</li> </ul>	<ul style="list-style-type: none"> <li>• Link/ACT (green)</li> </ul>
Standards	<ul style="list-style-type: none"> <li>• OHCI (Open Host Controller Interface)</li> <li>• EHCI (Enhanced Host Controller Interface)</li> <li>• IEEE 802.3 Ethernet</li> <li>• IEEE 802.3u Fast Ethernet</li> <li>• IEEE 802.3ab Gigabit Ethernet</li> <li>• IEEE 802.3x Full Duplex and Half Duplex</li> <li>• IEEE 802.3az Wake-On-LAN Support</li> </ul>	<ul style="list-style-type: none"> <li>• USB Specification Version 3.0</li> <li>• USB Specification Version 2.0</li> <li>• USB Specification Version 1.1</li> <li>• HDMI 1.4</li> <li>• HDCP 2.2</li> <li>• DisplayPort Alternate Mode</li> </ul>

## General

Minimum System Requirements	<ul style="list-style-type: none"> <li>• Computer running Microsoft Windows, Mac OS, or Chrome OS</li> </ul>	<ul style="list-style-type: none"> <li>• A USB Type-C Port with DisplayPort Alternate Mode Supported</li> </ul>
-----------------------------	--	---

## Physical

Dimensions (W x H x D)	<ul style="list-style-type: none"> <li>• 103 x 31 x 11 mm (4.06 x 1.22 x 0.43 in)</li> </ul>	<ul style="list-style-type: none"> <li>• Cable length: 17 cm (6.69 in)</li> </ul>
Weight	<ul style="list-style-type: none"> <li>• 49.0 g (1.73 oz)</li> </ul>	
Power	<ul style="list-style-type: none"> <li>• Input: Bus-powered</li> </ul>	<ul style="list-style-type: none"> <li>• Consumption: 120 mA, 5 V DC</li> </ul>
Temperature	<ul style="list-style-type: none"> <li>• Operating: 0 to 70 °C (32 to 158 °F)</li> </ul>	<ul style="list-style-type: none"> <li>• Storage: -25 to 85 °C (-13 to 185 °F)</li> </ul>
Humidity	<ul style="list-style-type: none"> <li>• Operating: 5% to 80% RH, non-condensing</li> </ul>	<ul style="list-style-type: none"> <li>• Storage: 5% to 80% RH, non-condensing</li> </ul>
Certifications	<ul style="list-style-type: none"> <li>• CE</li> <li>• FCC</li> </ul>	<ul style="list-style-type: none"> <li>• IC</li> <li>• RCM</li> </ul>



For more information: [www.dlink.com](http://www.dlink.com)

**D-Link European Headquarters.** D-Link (Europe) Ltd., First Floor, Artemis Building, Odyssey Business Park, West End Road, South Ruislip HA4 6QE, United Kingdom.  
Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.  
All other trademarks belong to their respective owners. ©2019 D-Link Corporation. All rights reserved. E&OE.

Updated September 2019

**D-Link®**