


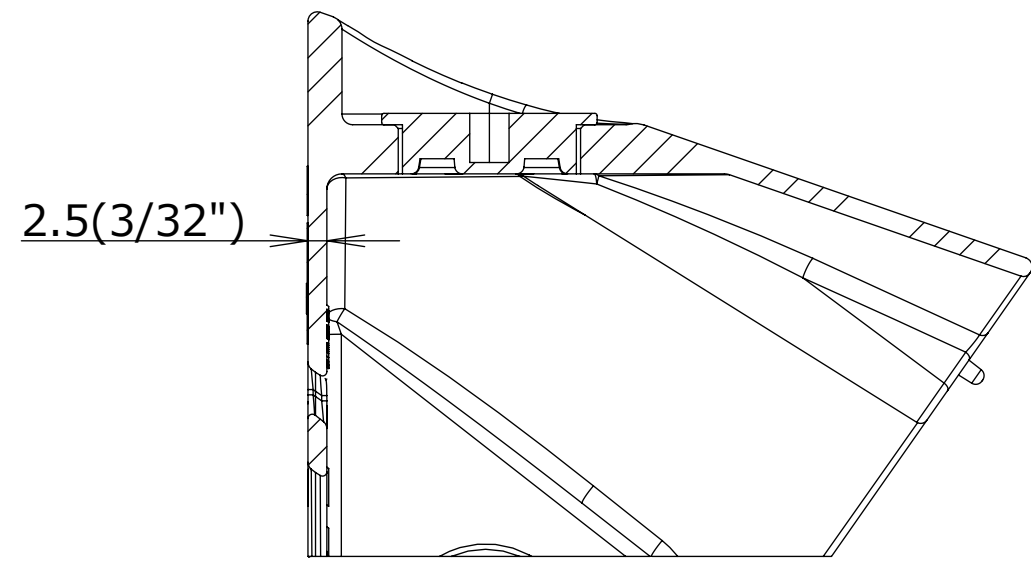
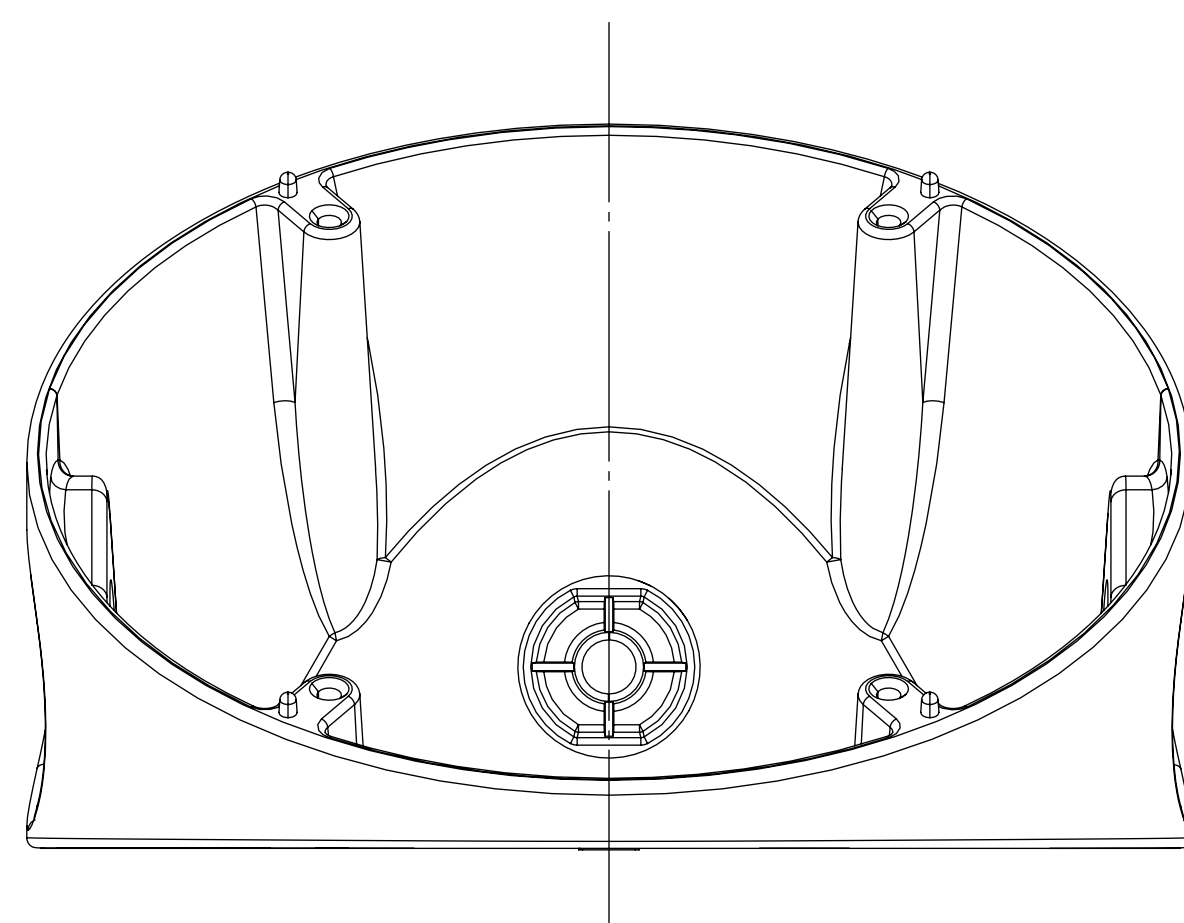
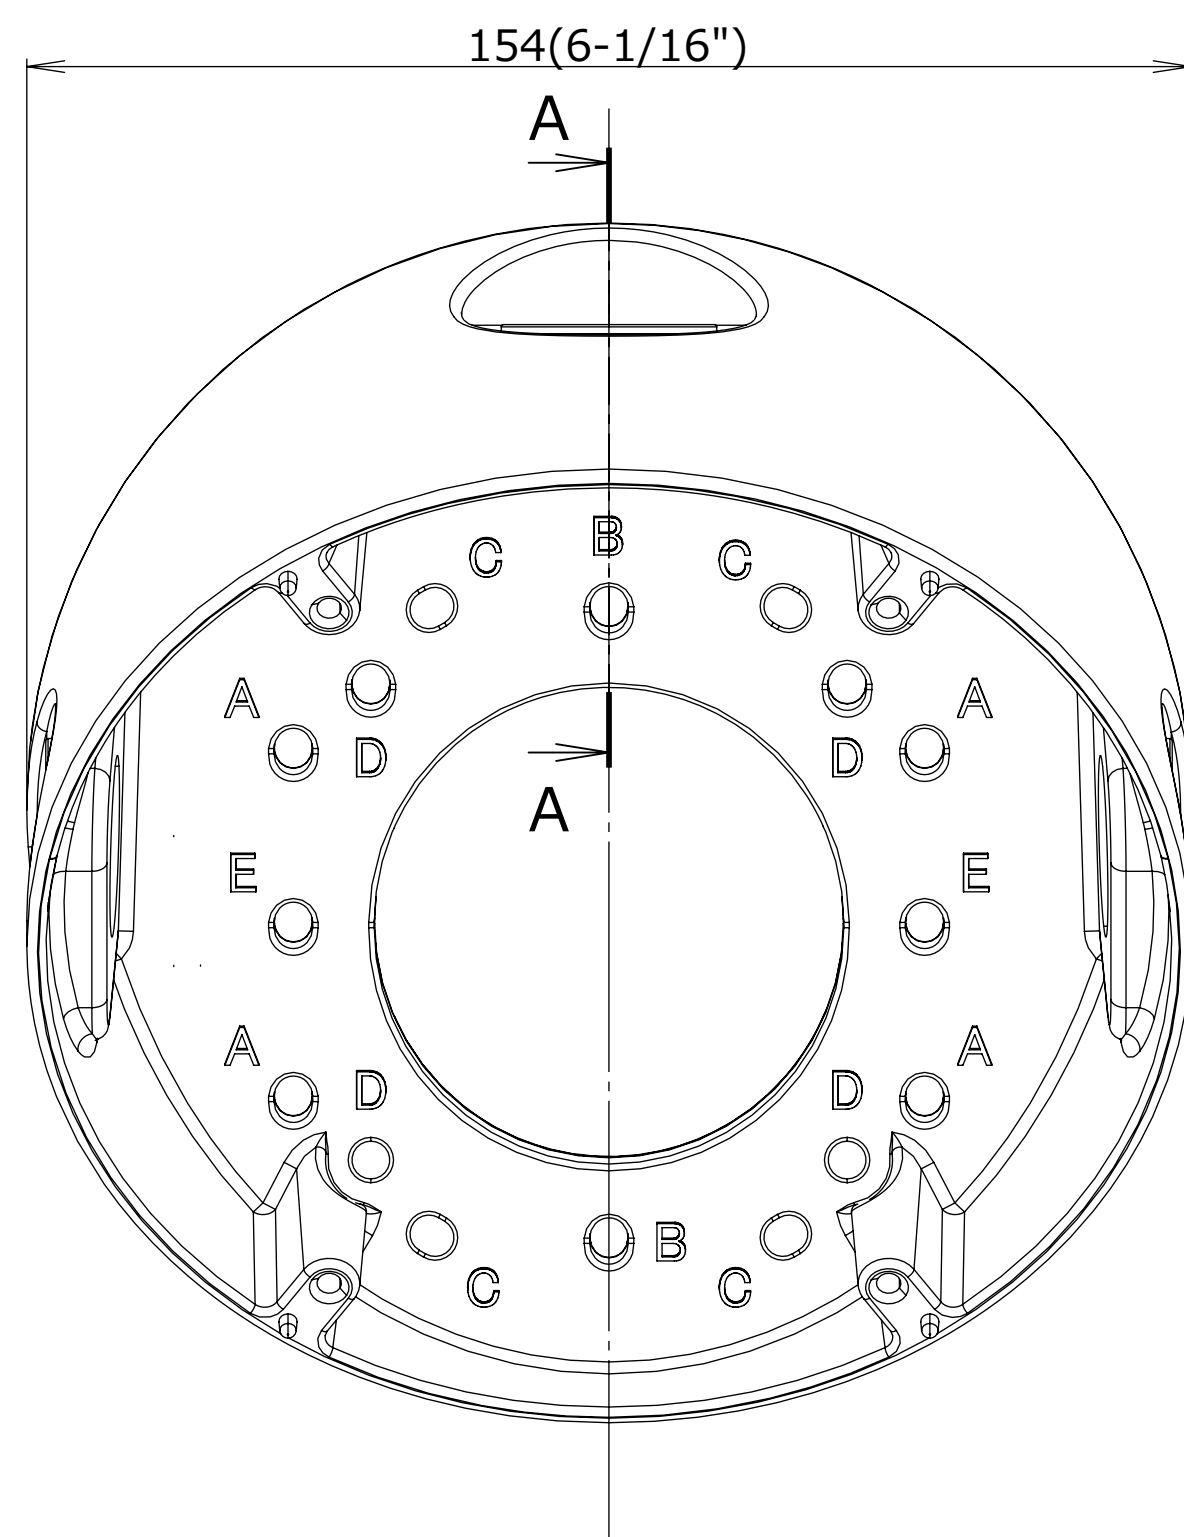
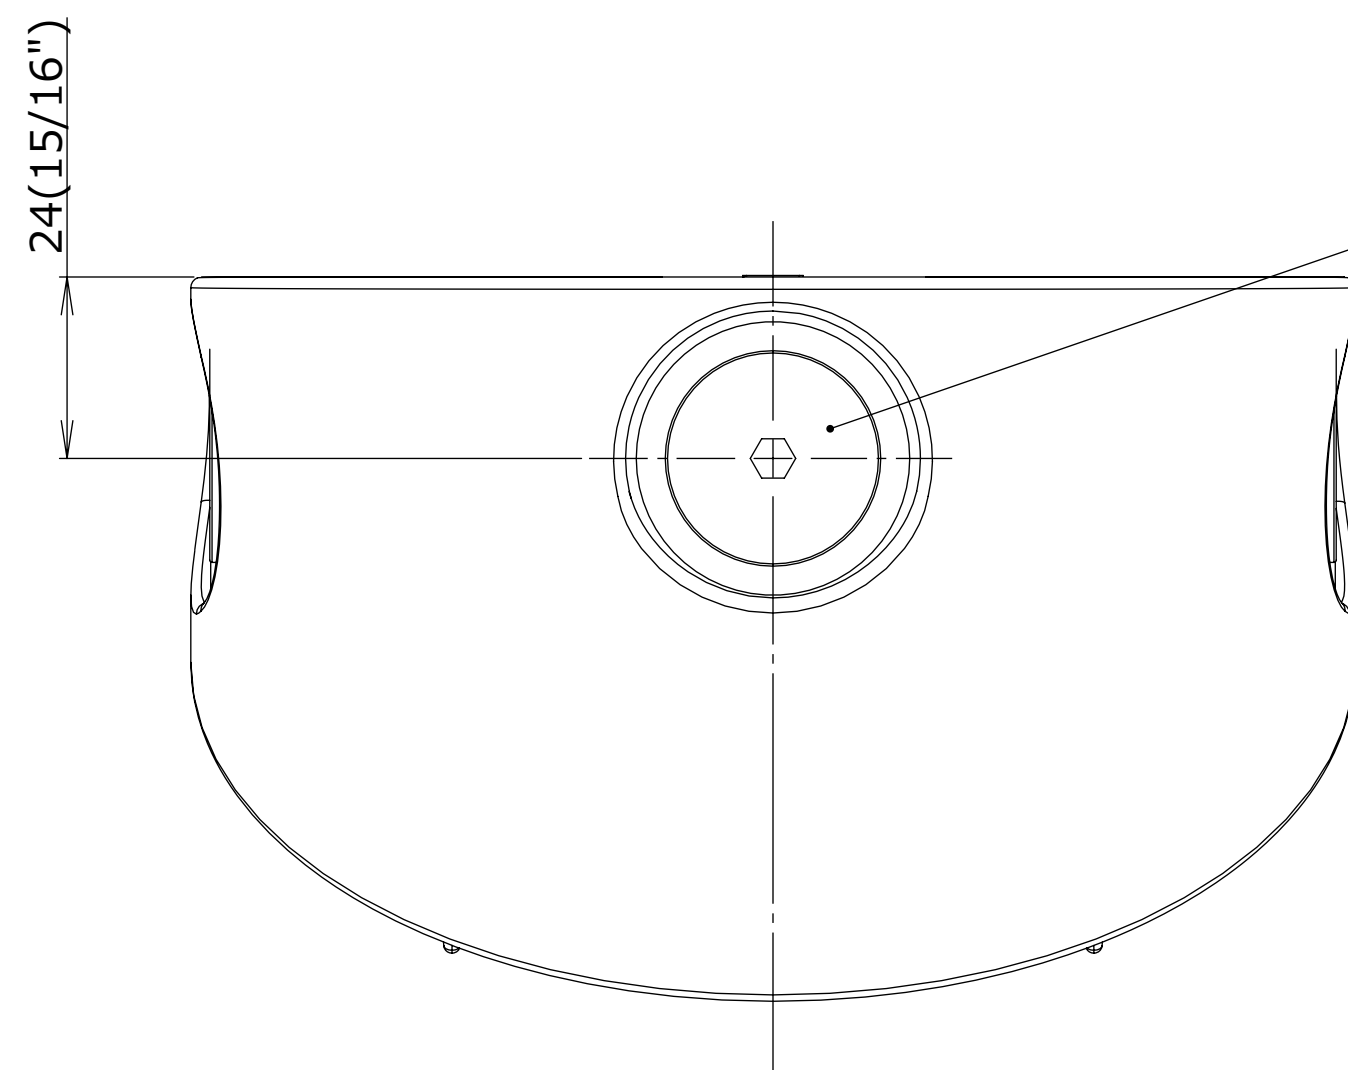


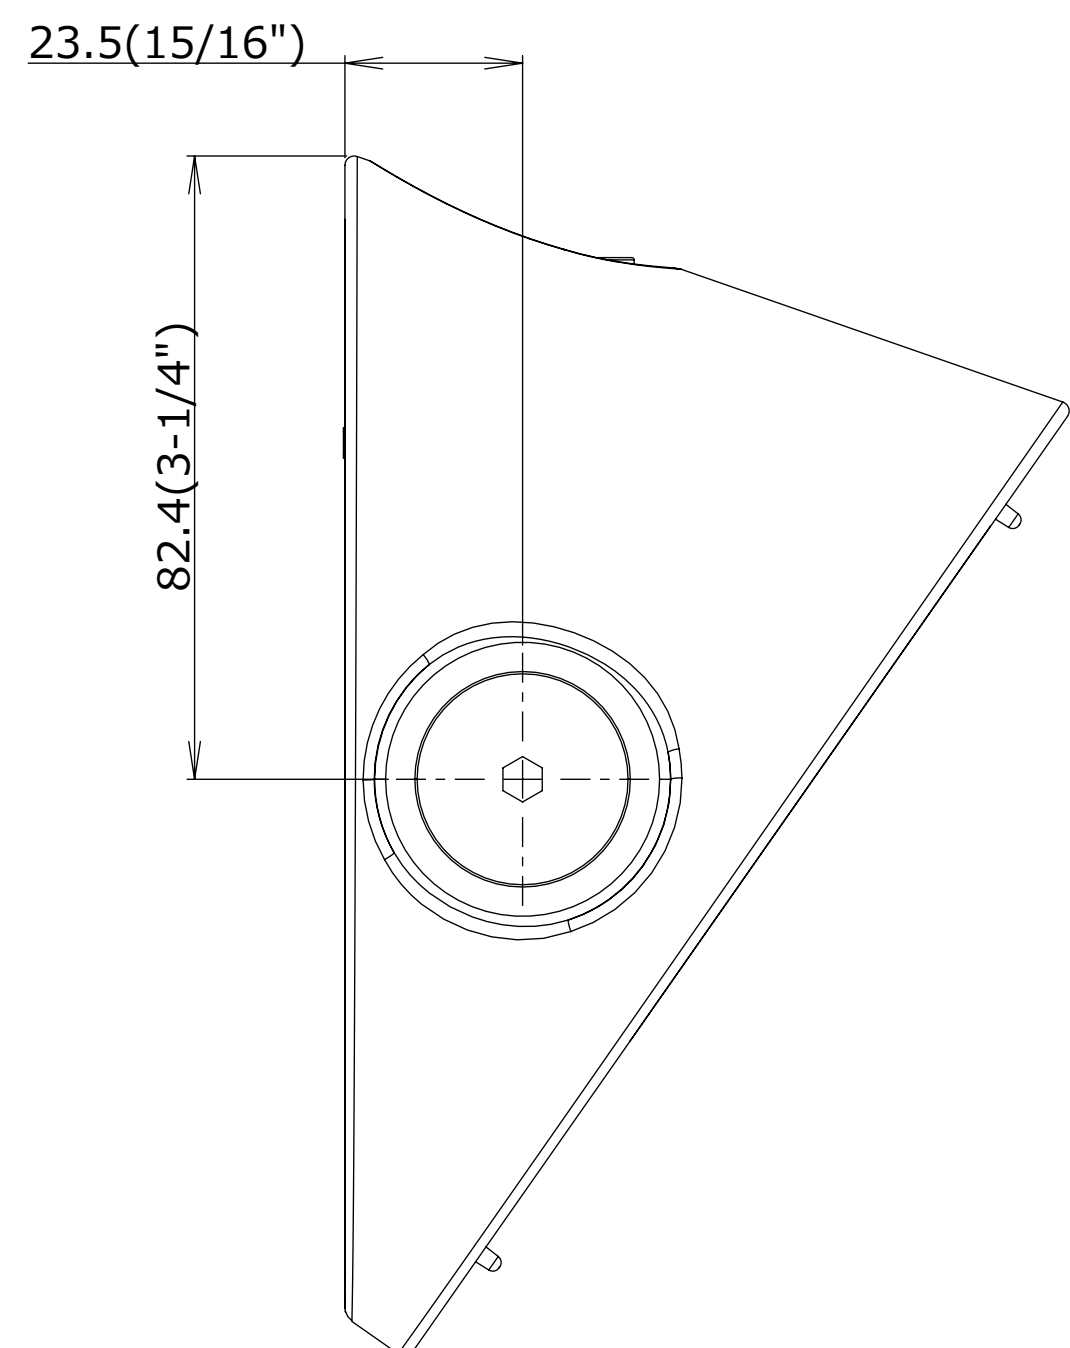


Sec A-A

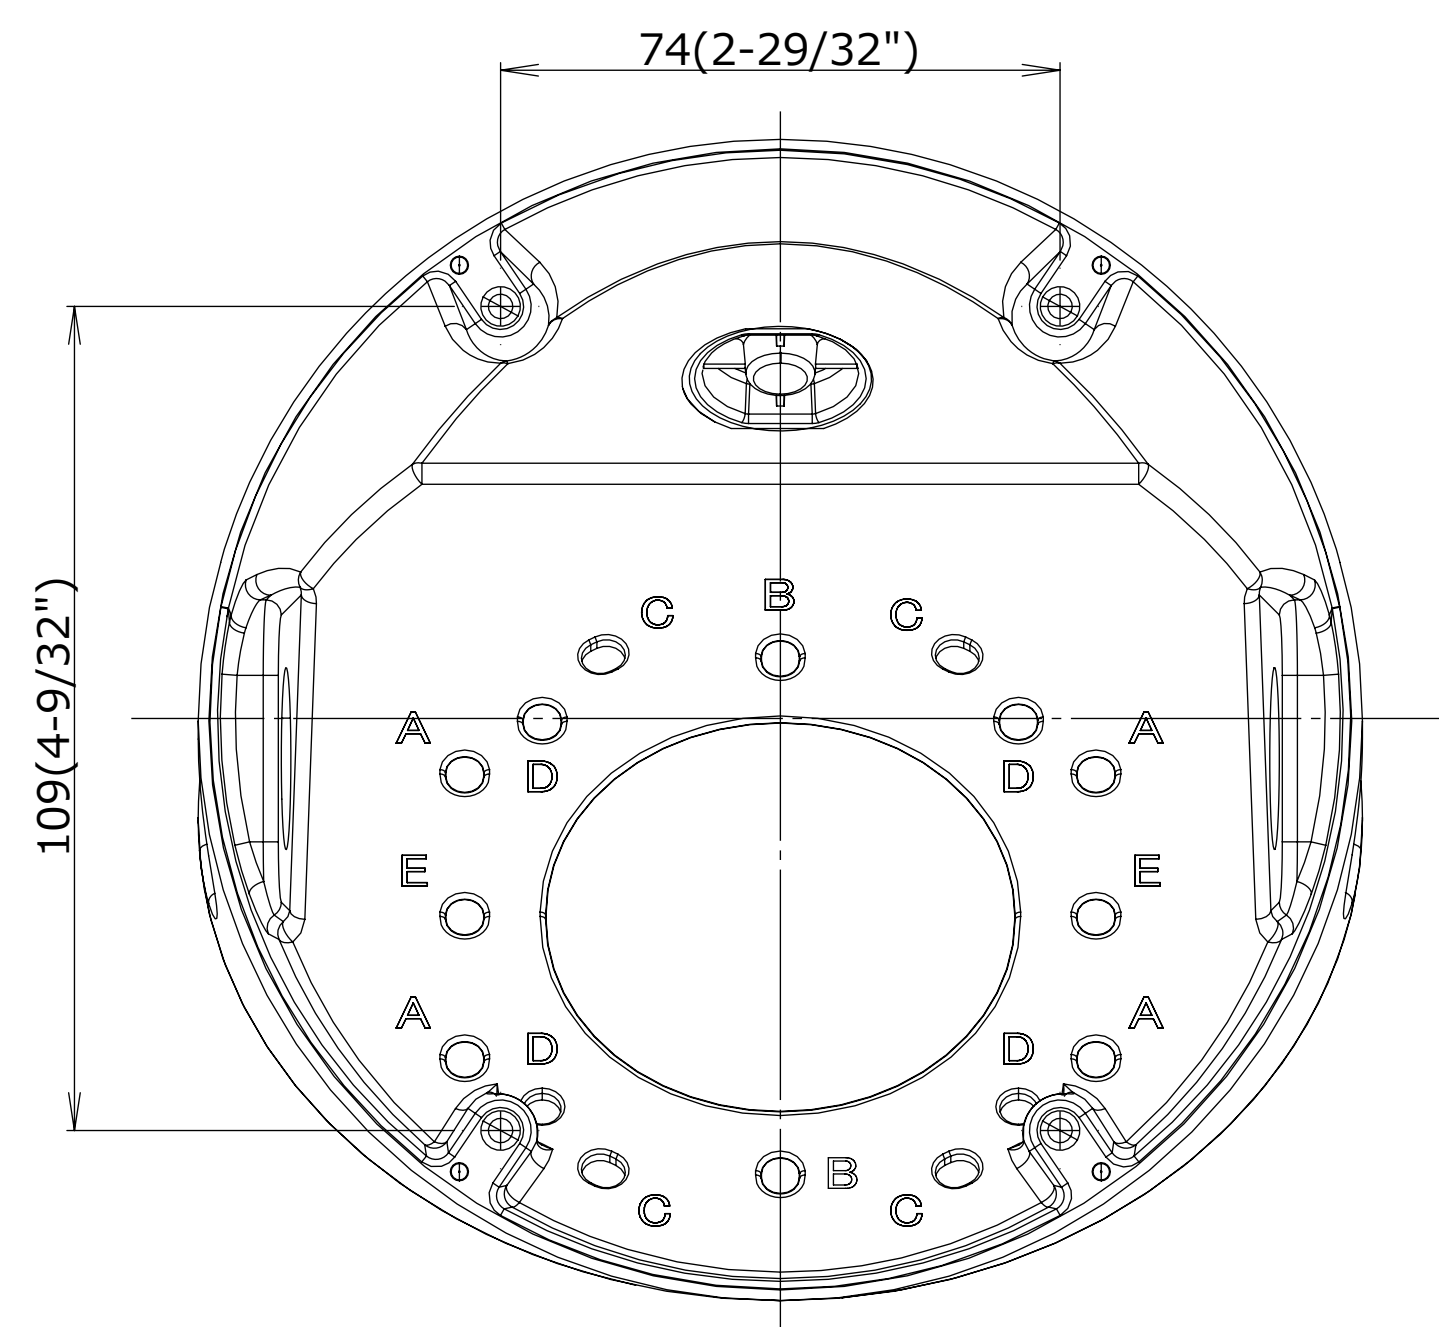

接続管用めねじ (3箇所)
Cap for the female thread for the conduit (3 places)
JIS C 8305(電線管ねじ)のCTG22、または
JIS B 0202(管用平行ねじ)のG3/4に対応しています。
The female thread for conduit is compliant with
ANSI NPSM (parallel pipe therads) 3/4 or
ISO 228-1 (parallel pipe threads) G3/4.

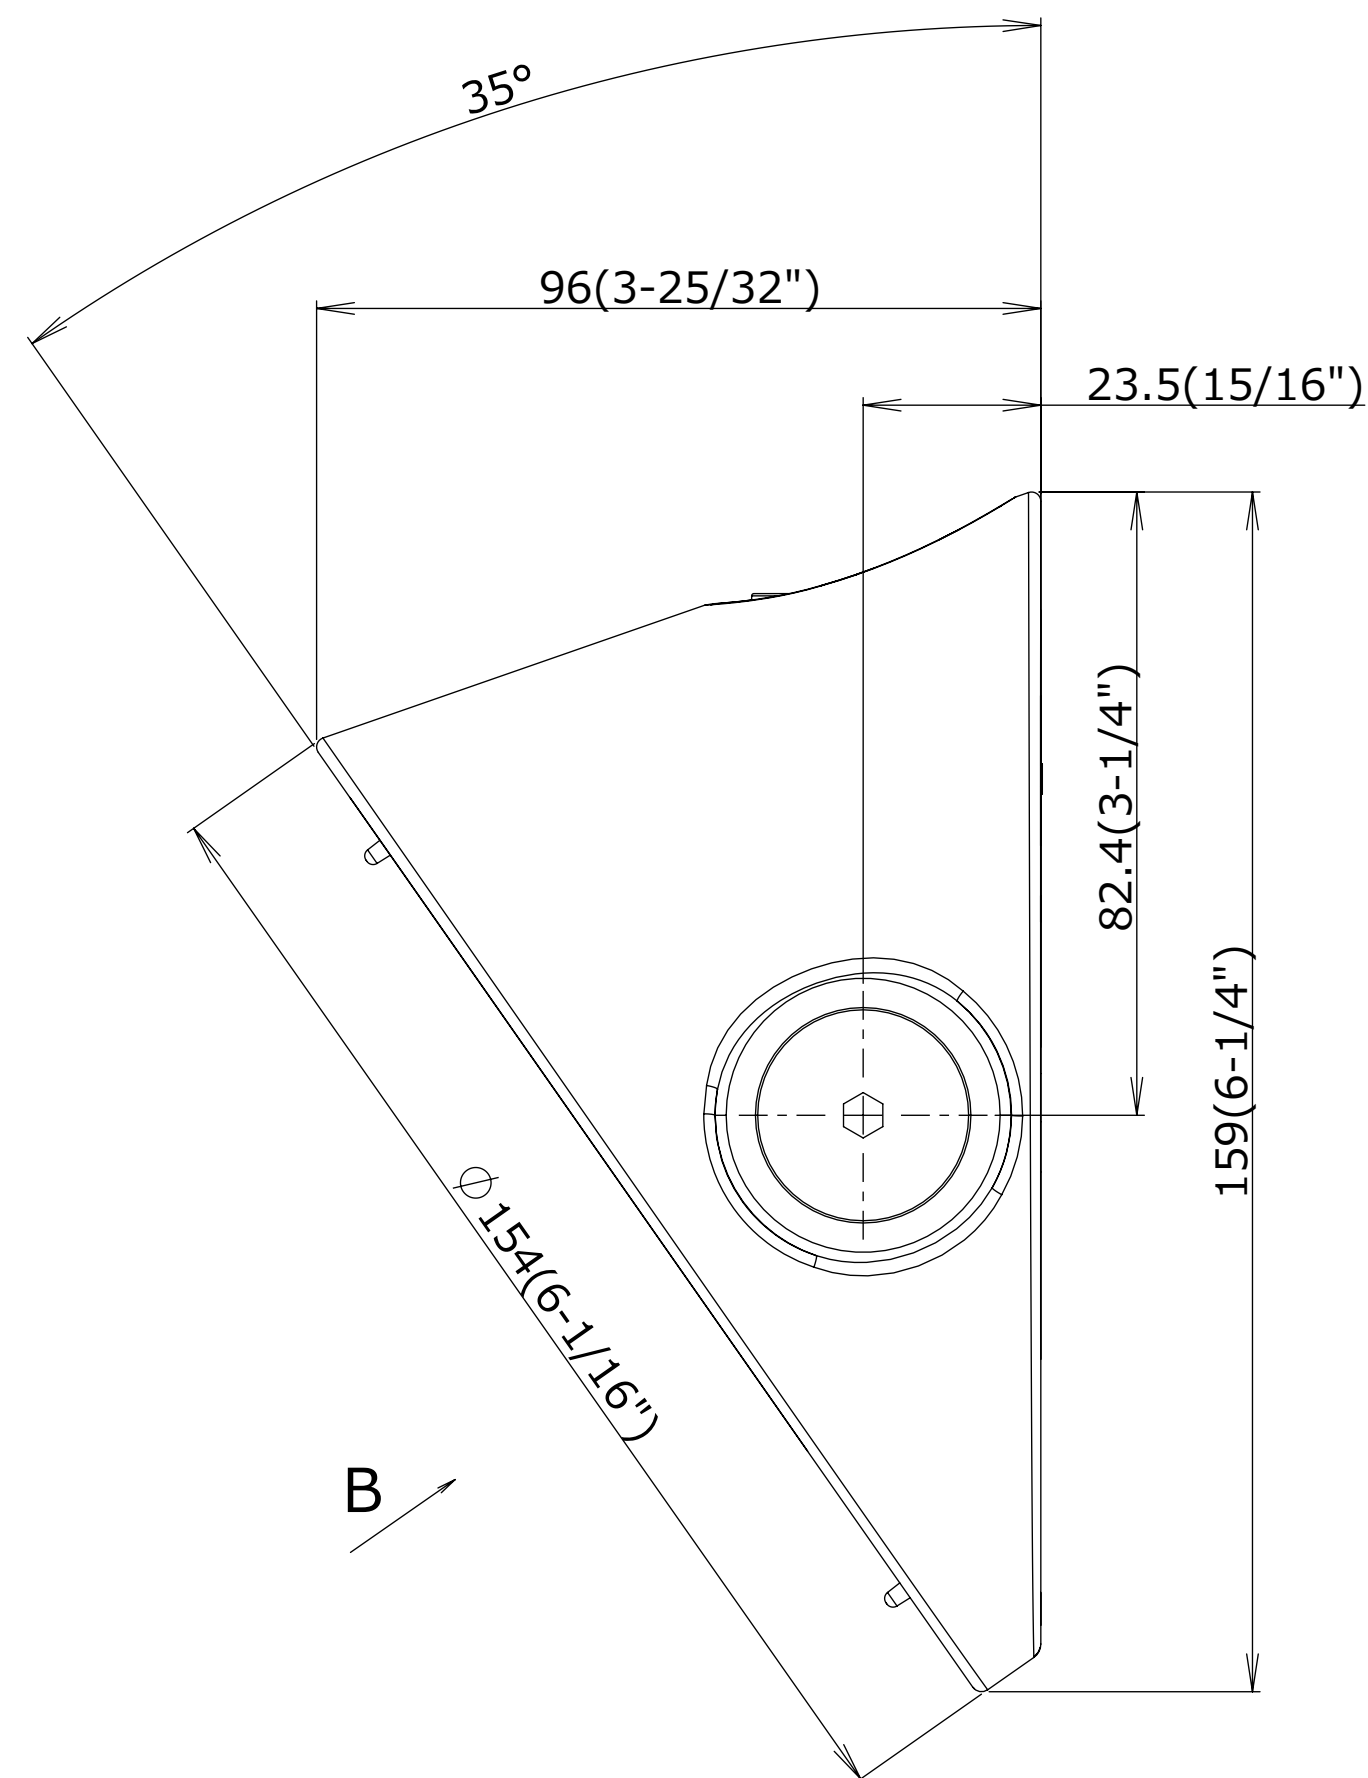


View B

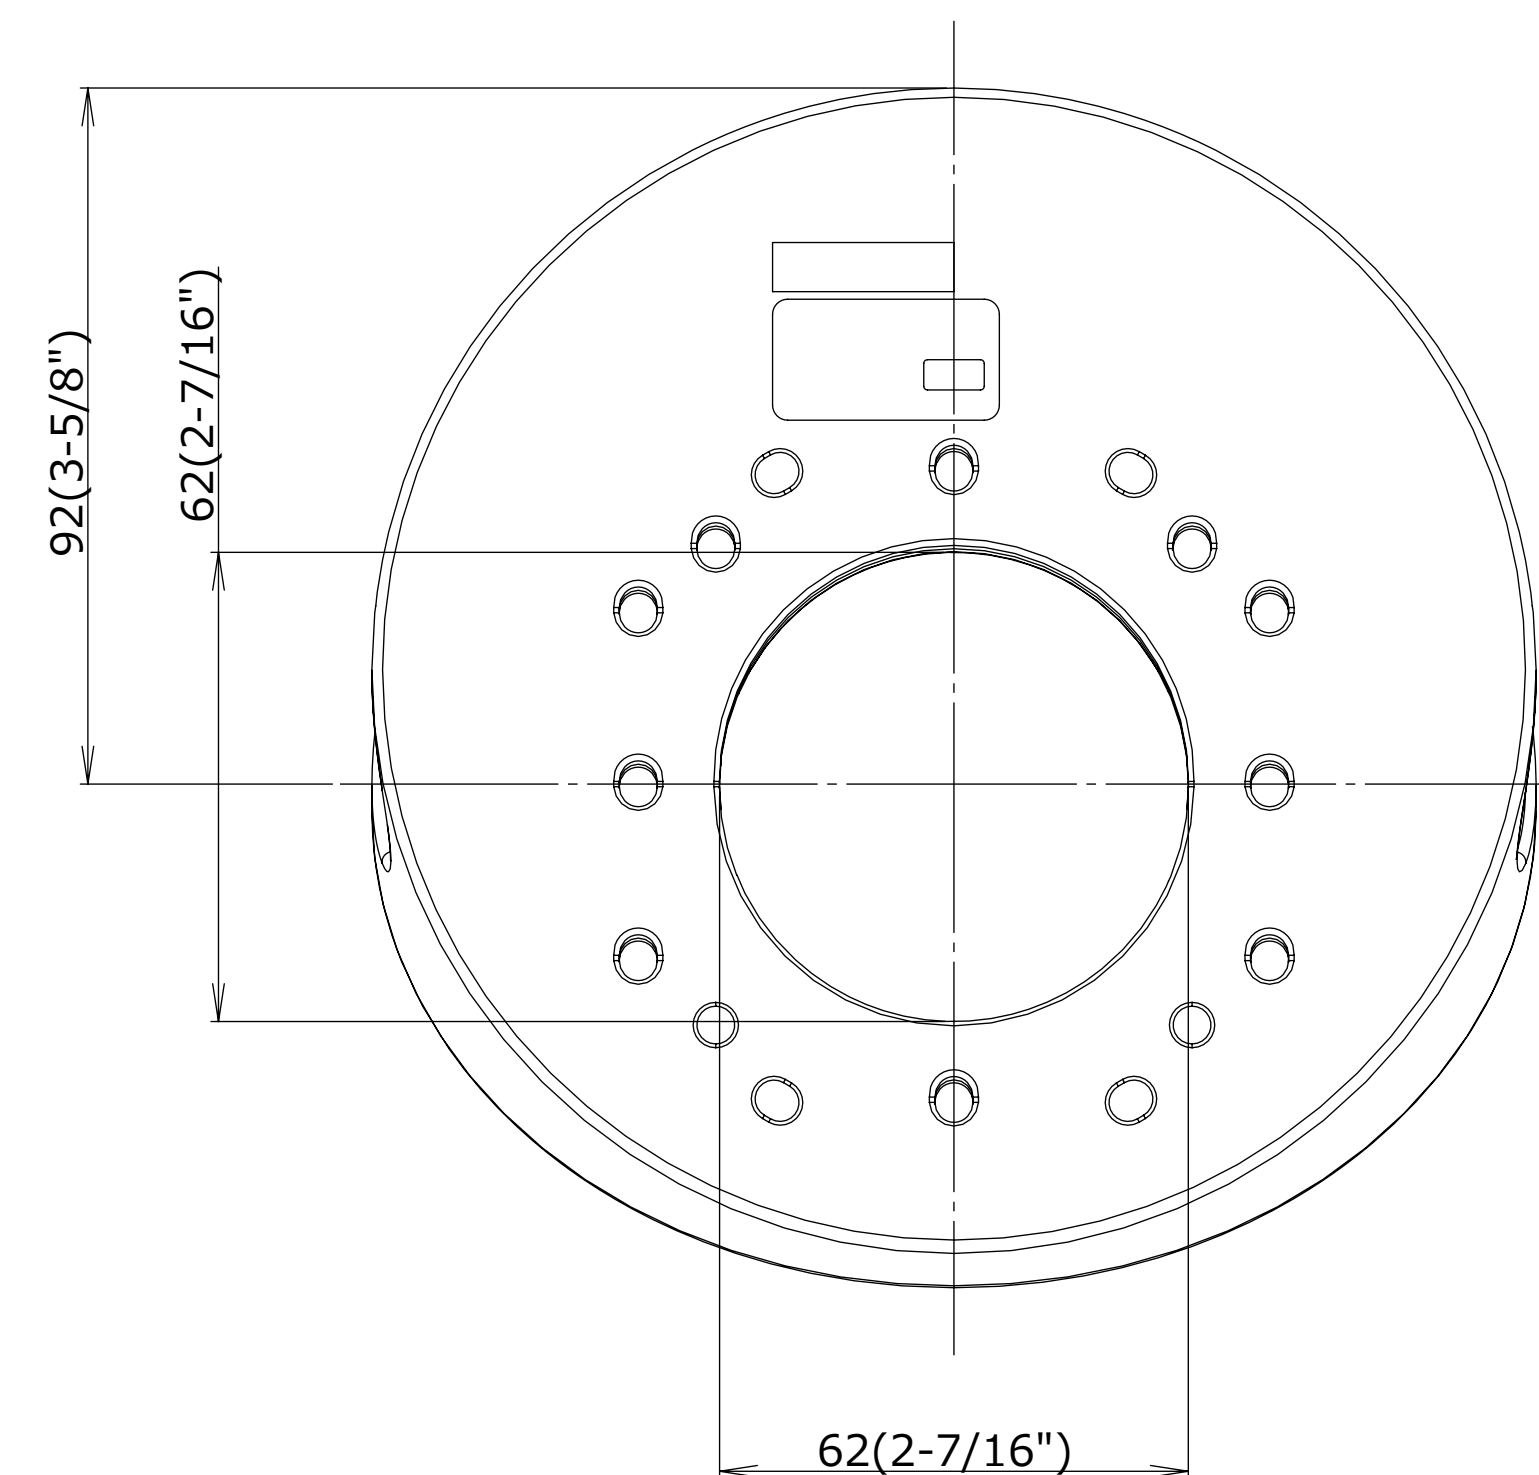


	投影面積/Projected area
側面図/Side-view	0.008(m2)
平面図/Top-view	0.013(m2)

Mass : Approx. 420 g {0.93 lbs}

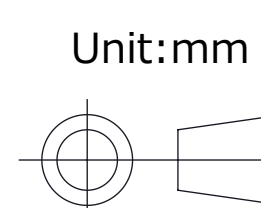


Mounting hole layout


Position A

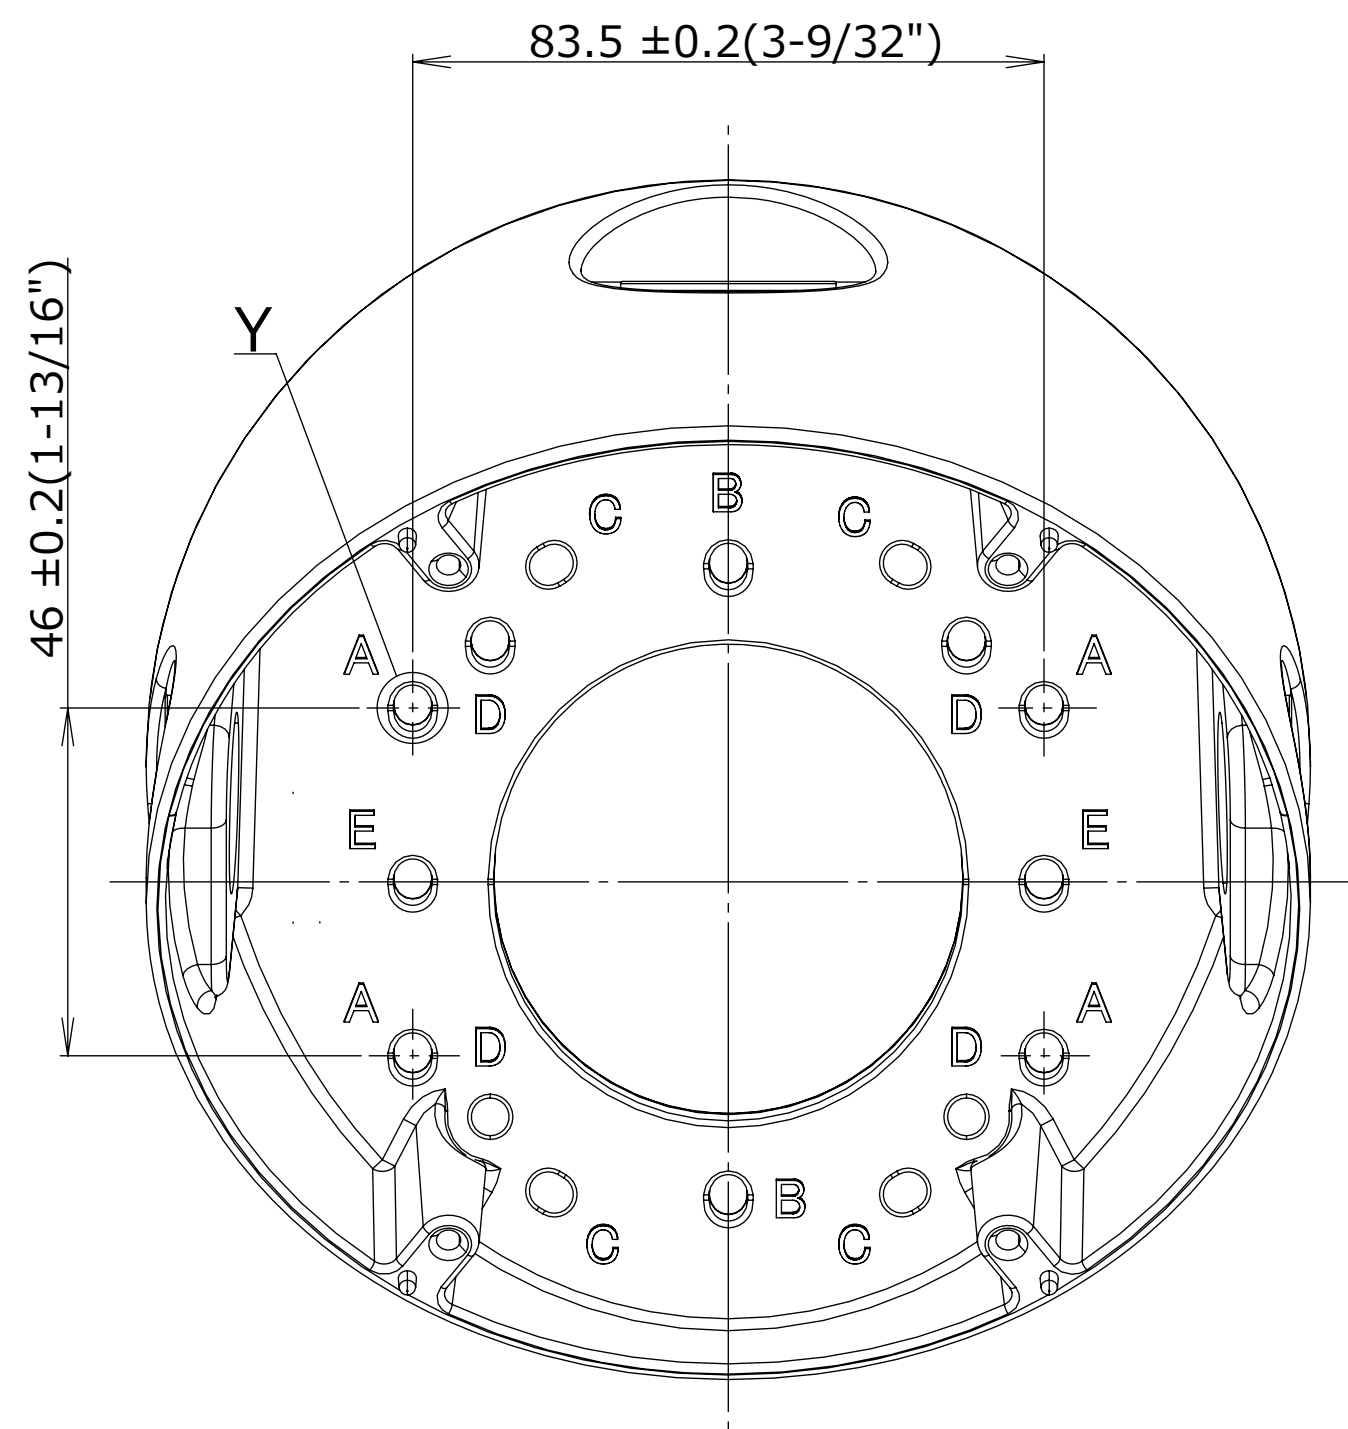


Position B

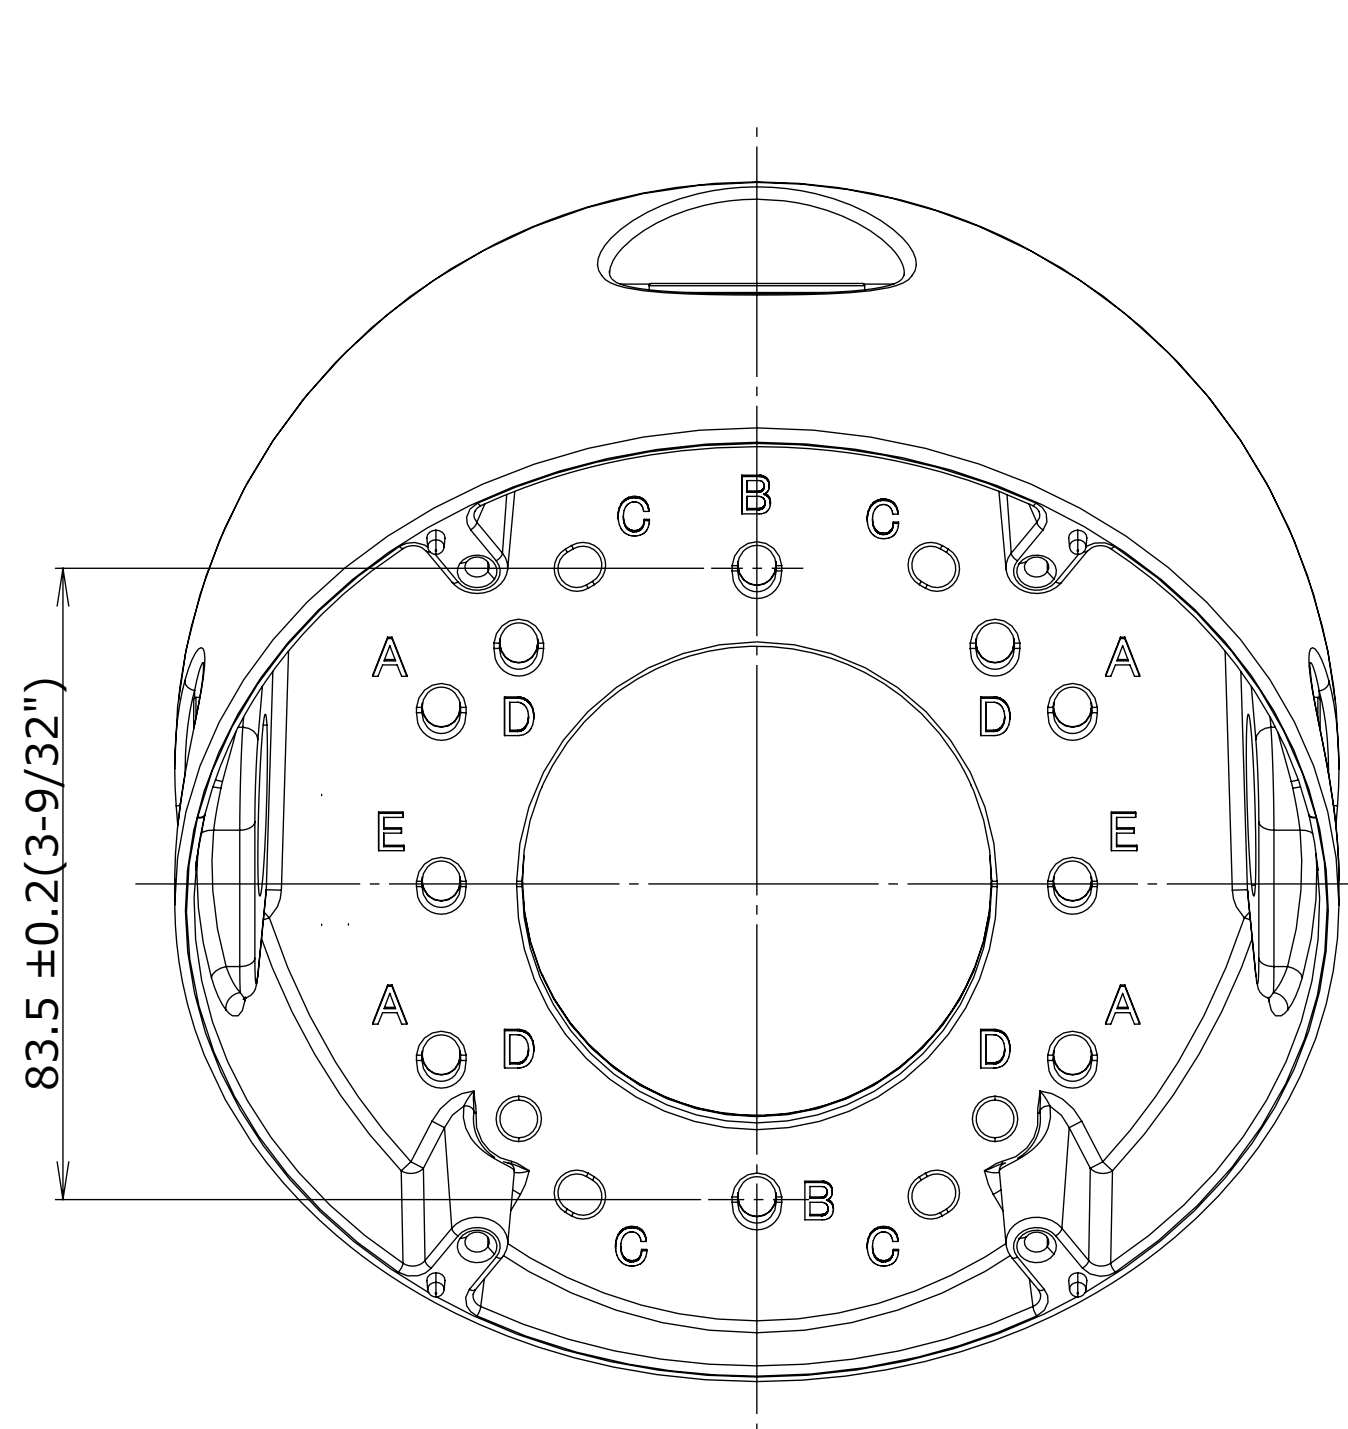





Position C

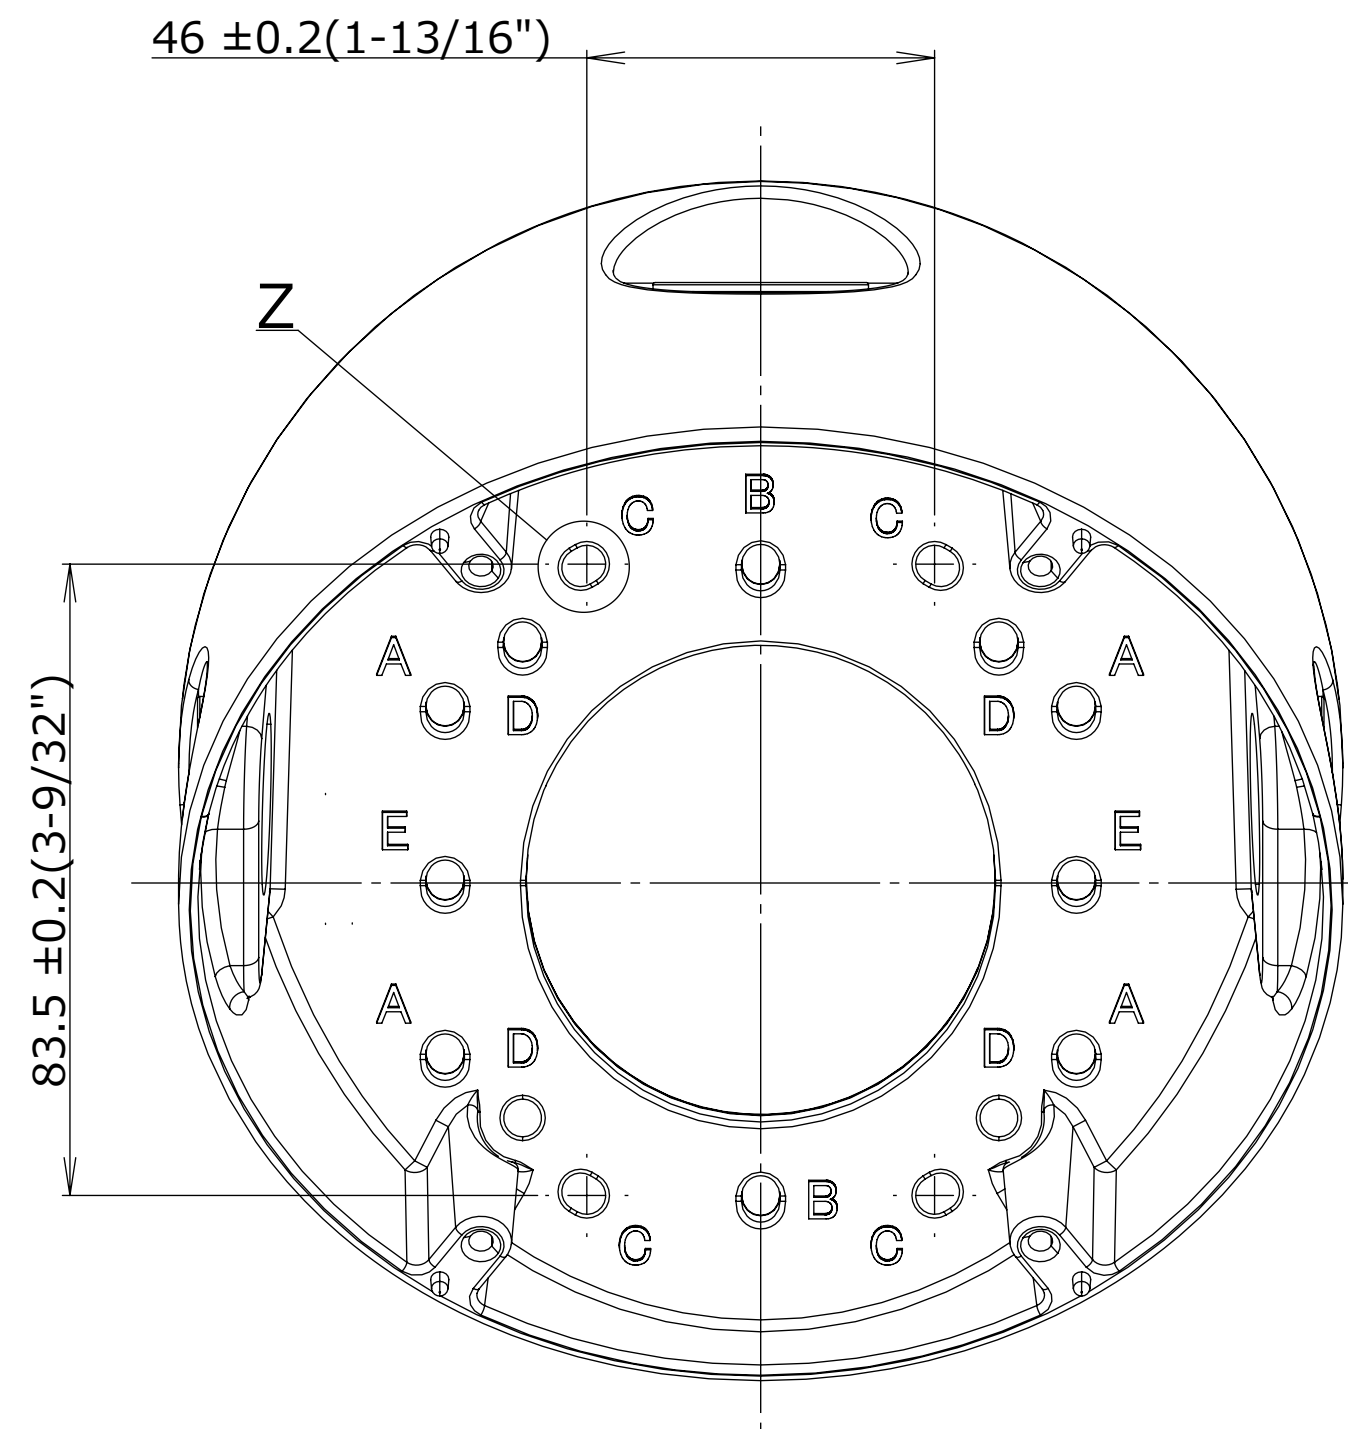


Position D

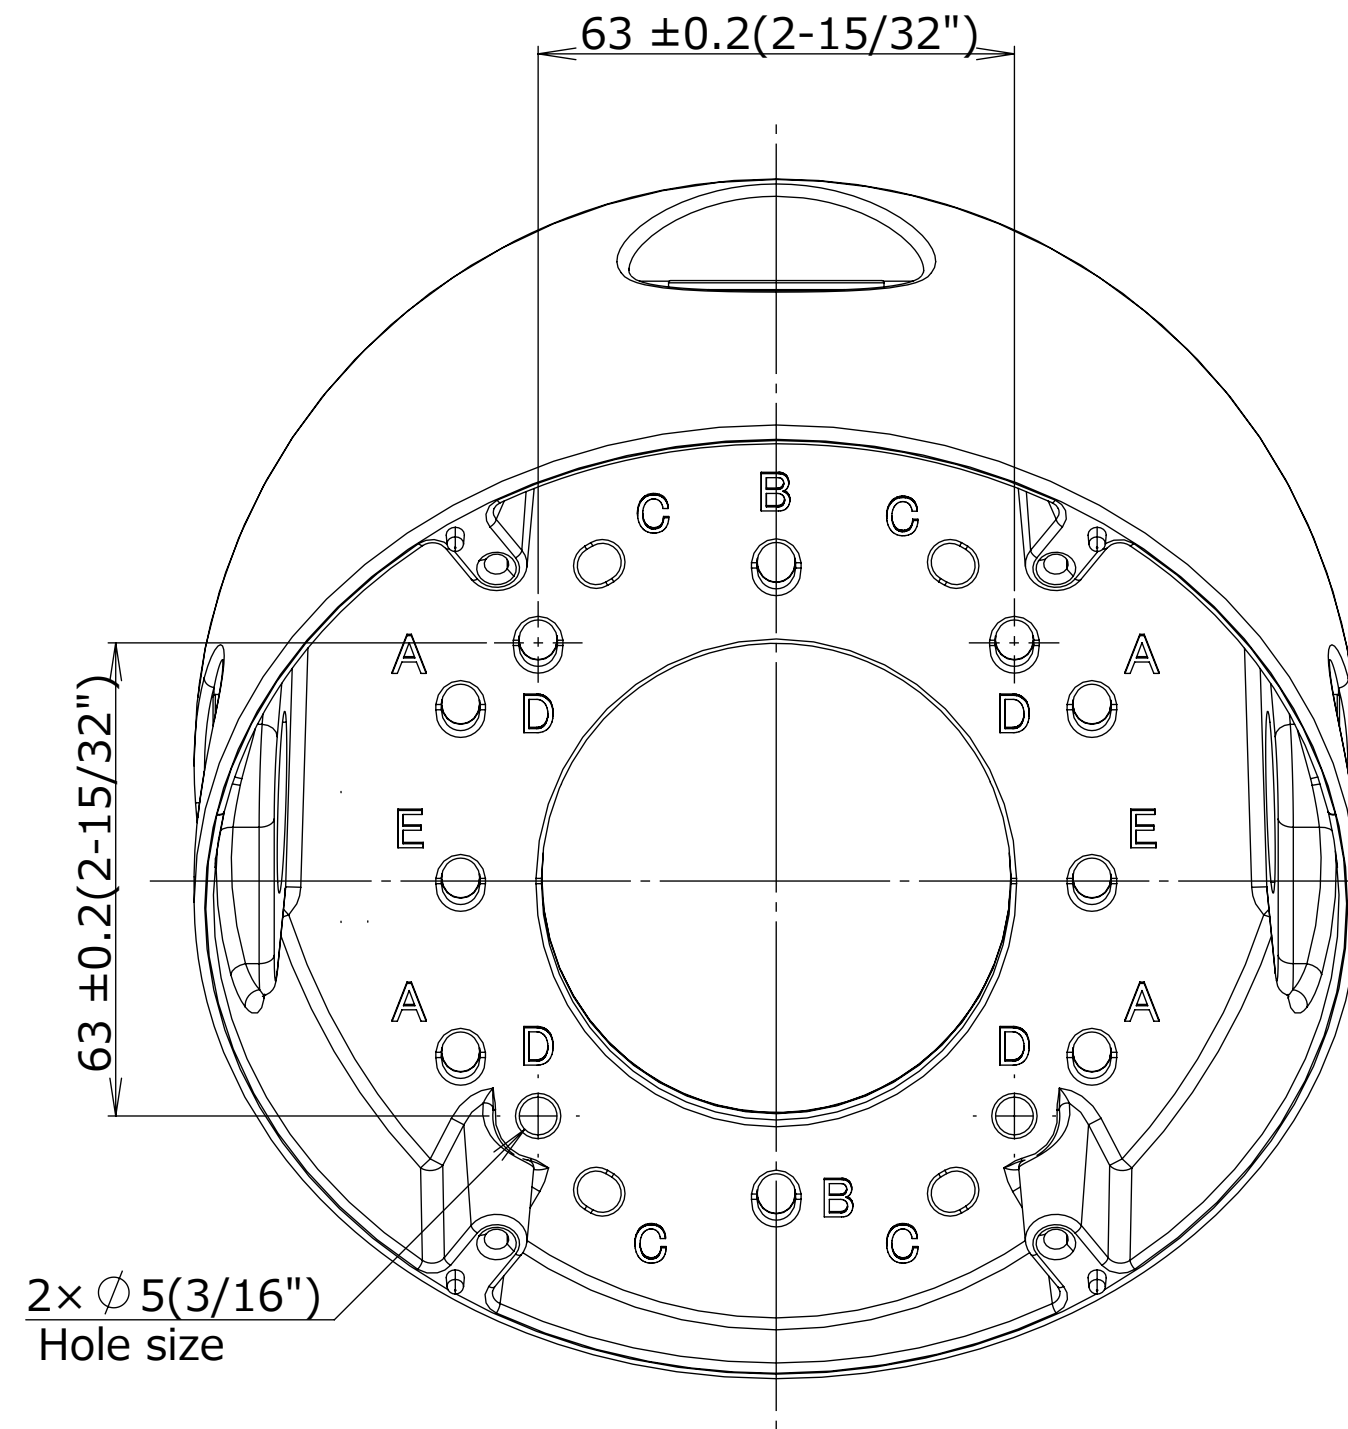


Position E

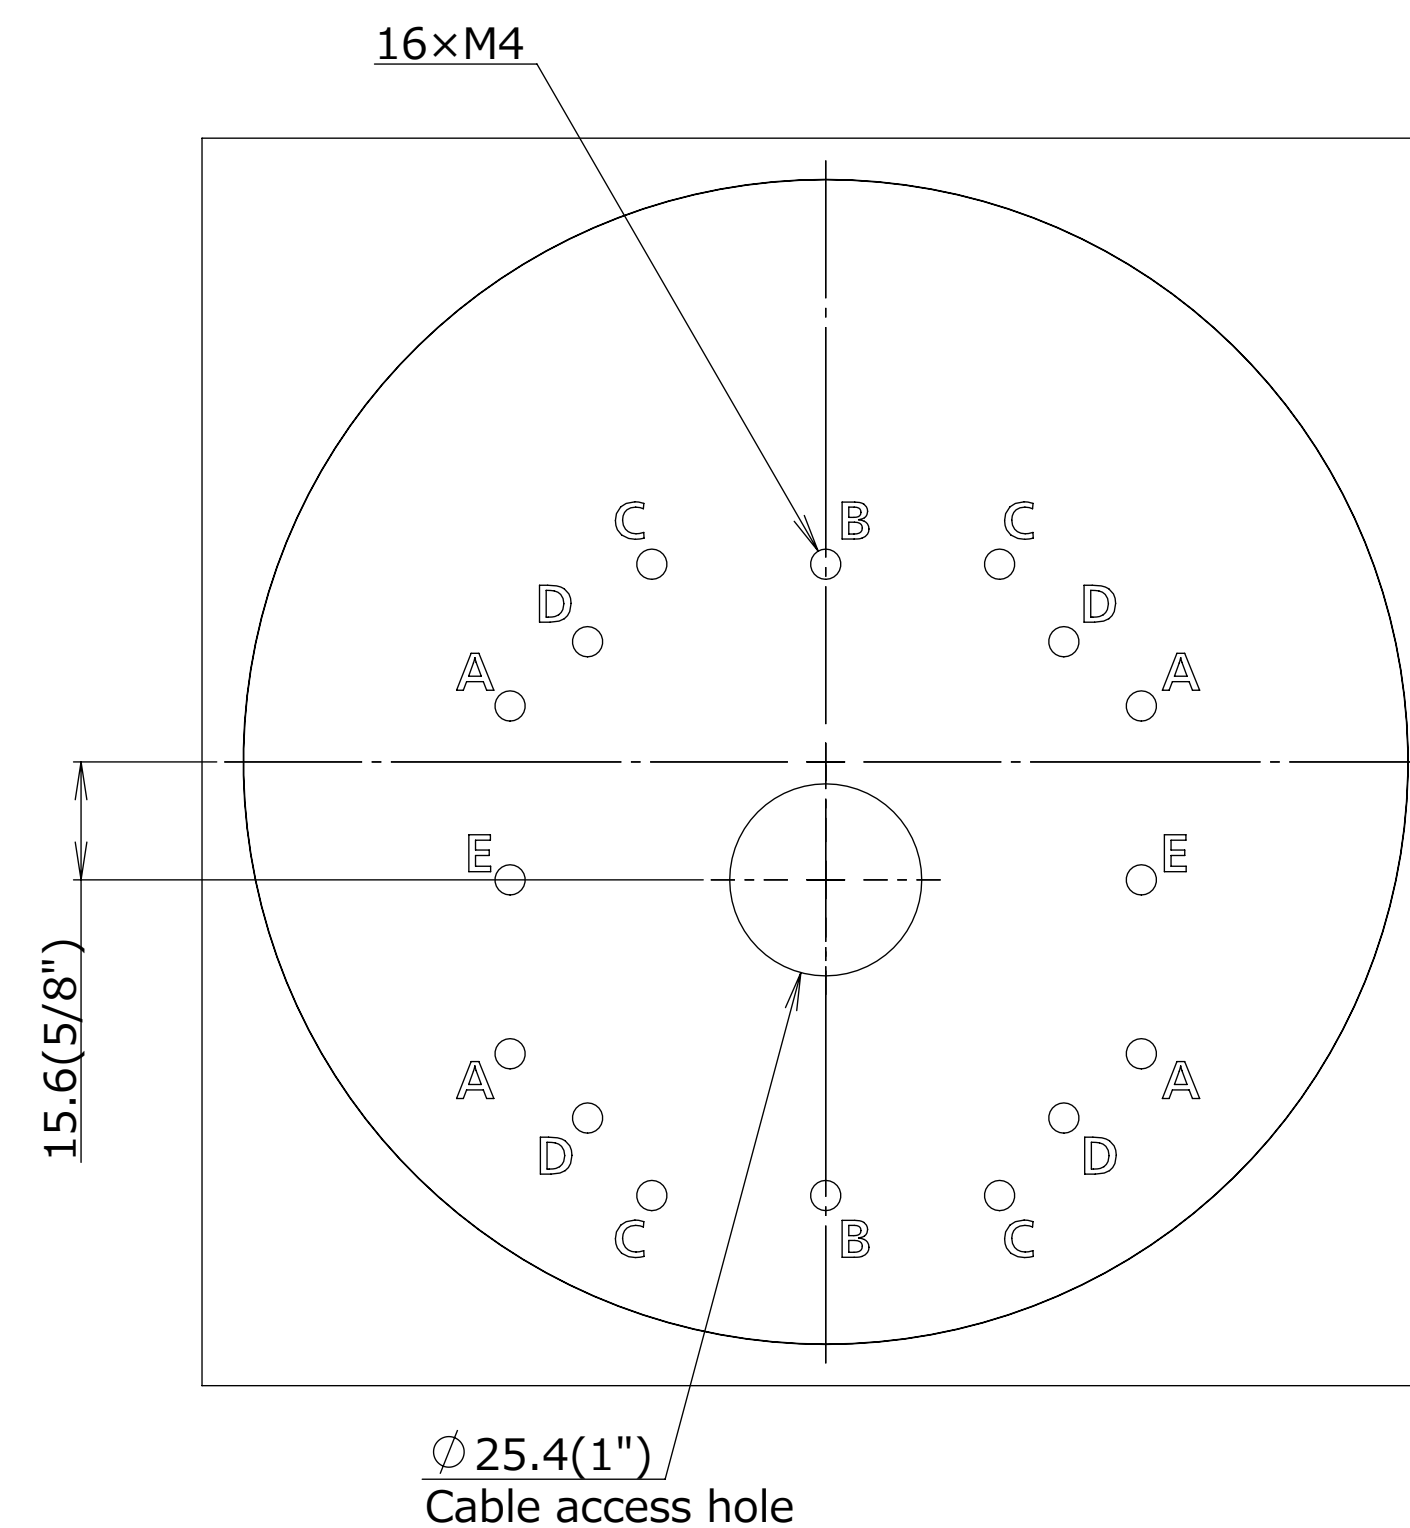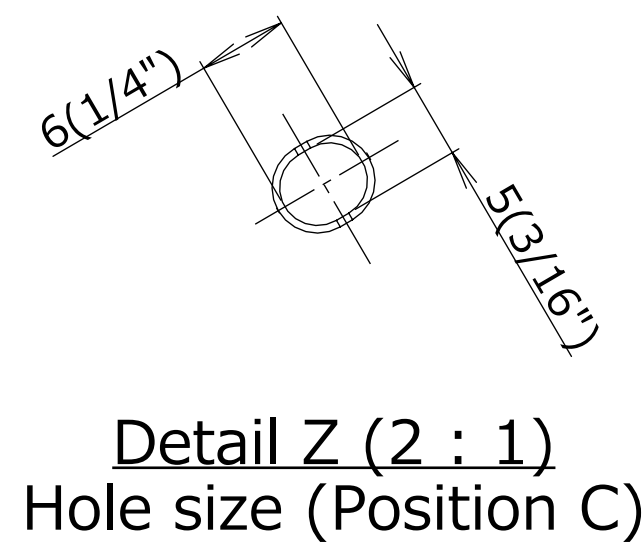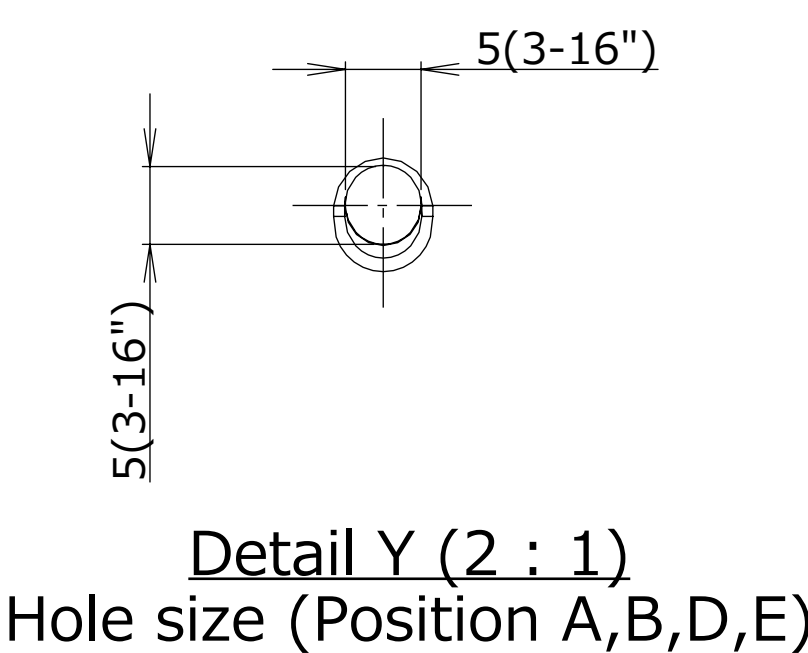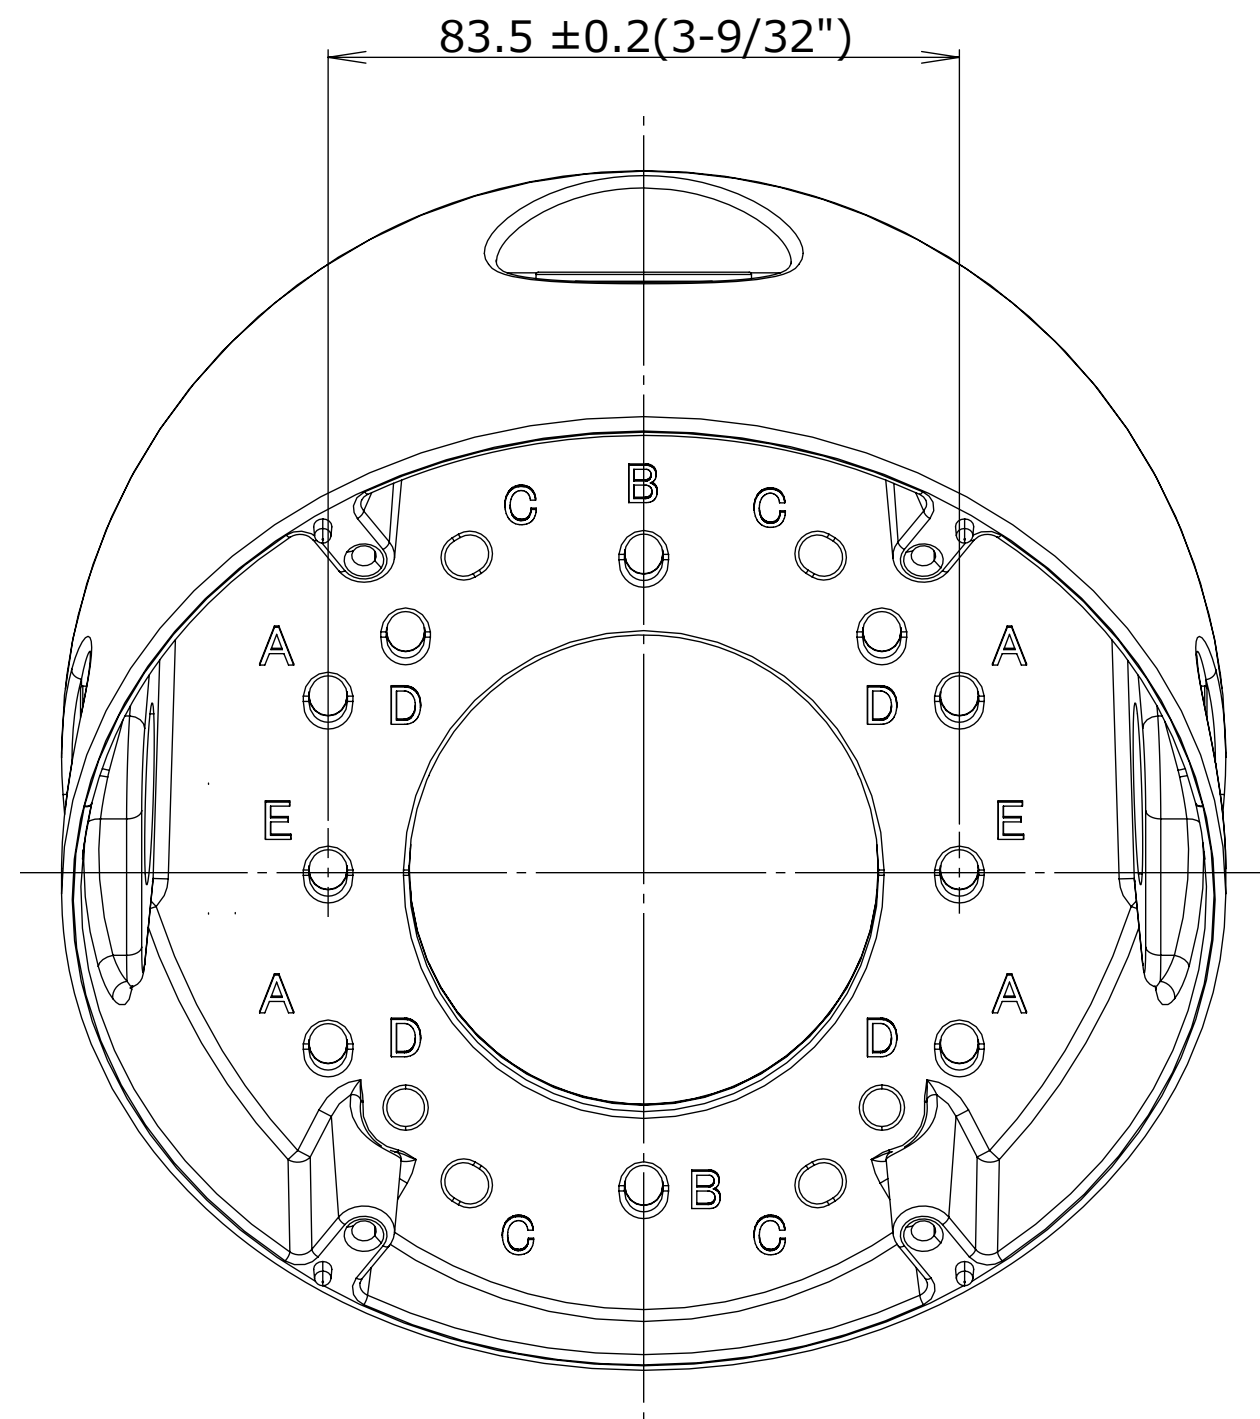

Unit:mm




カメラとの組み合わせ例
Example of combination with a camera

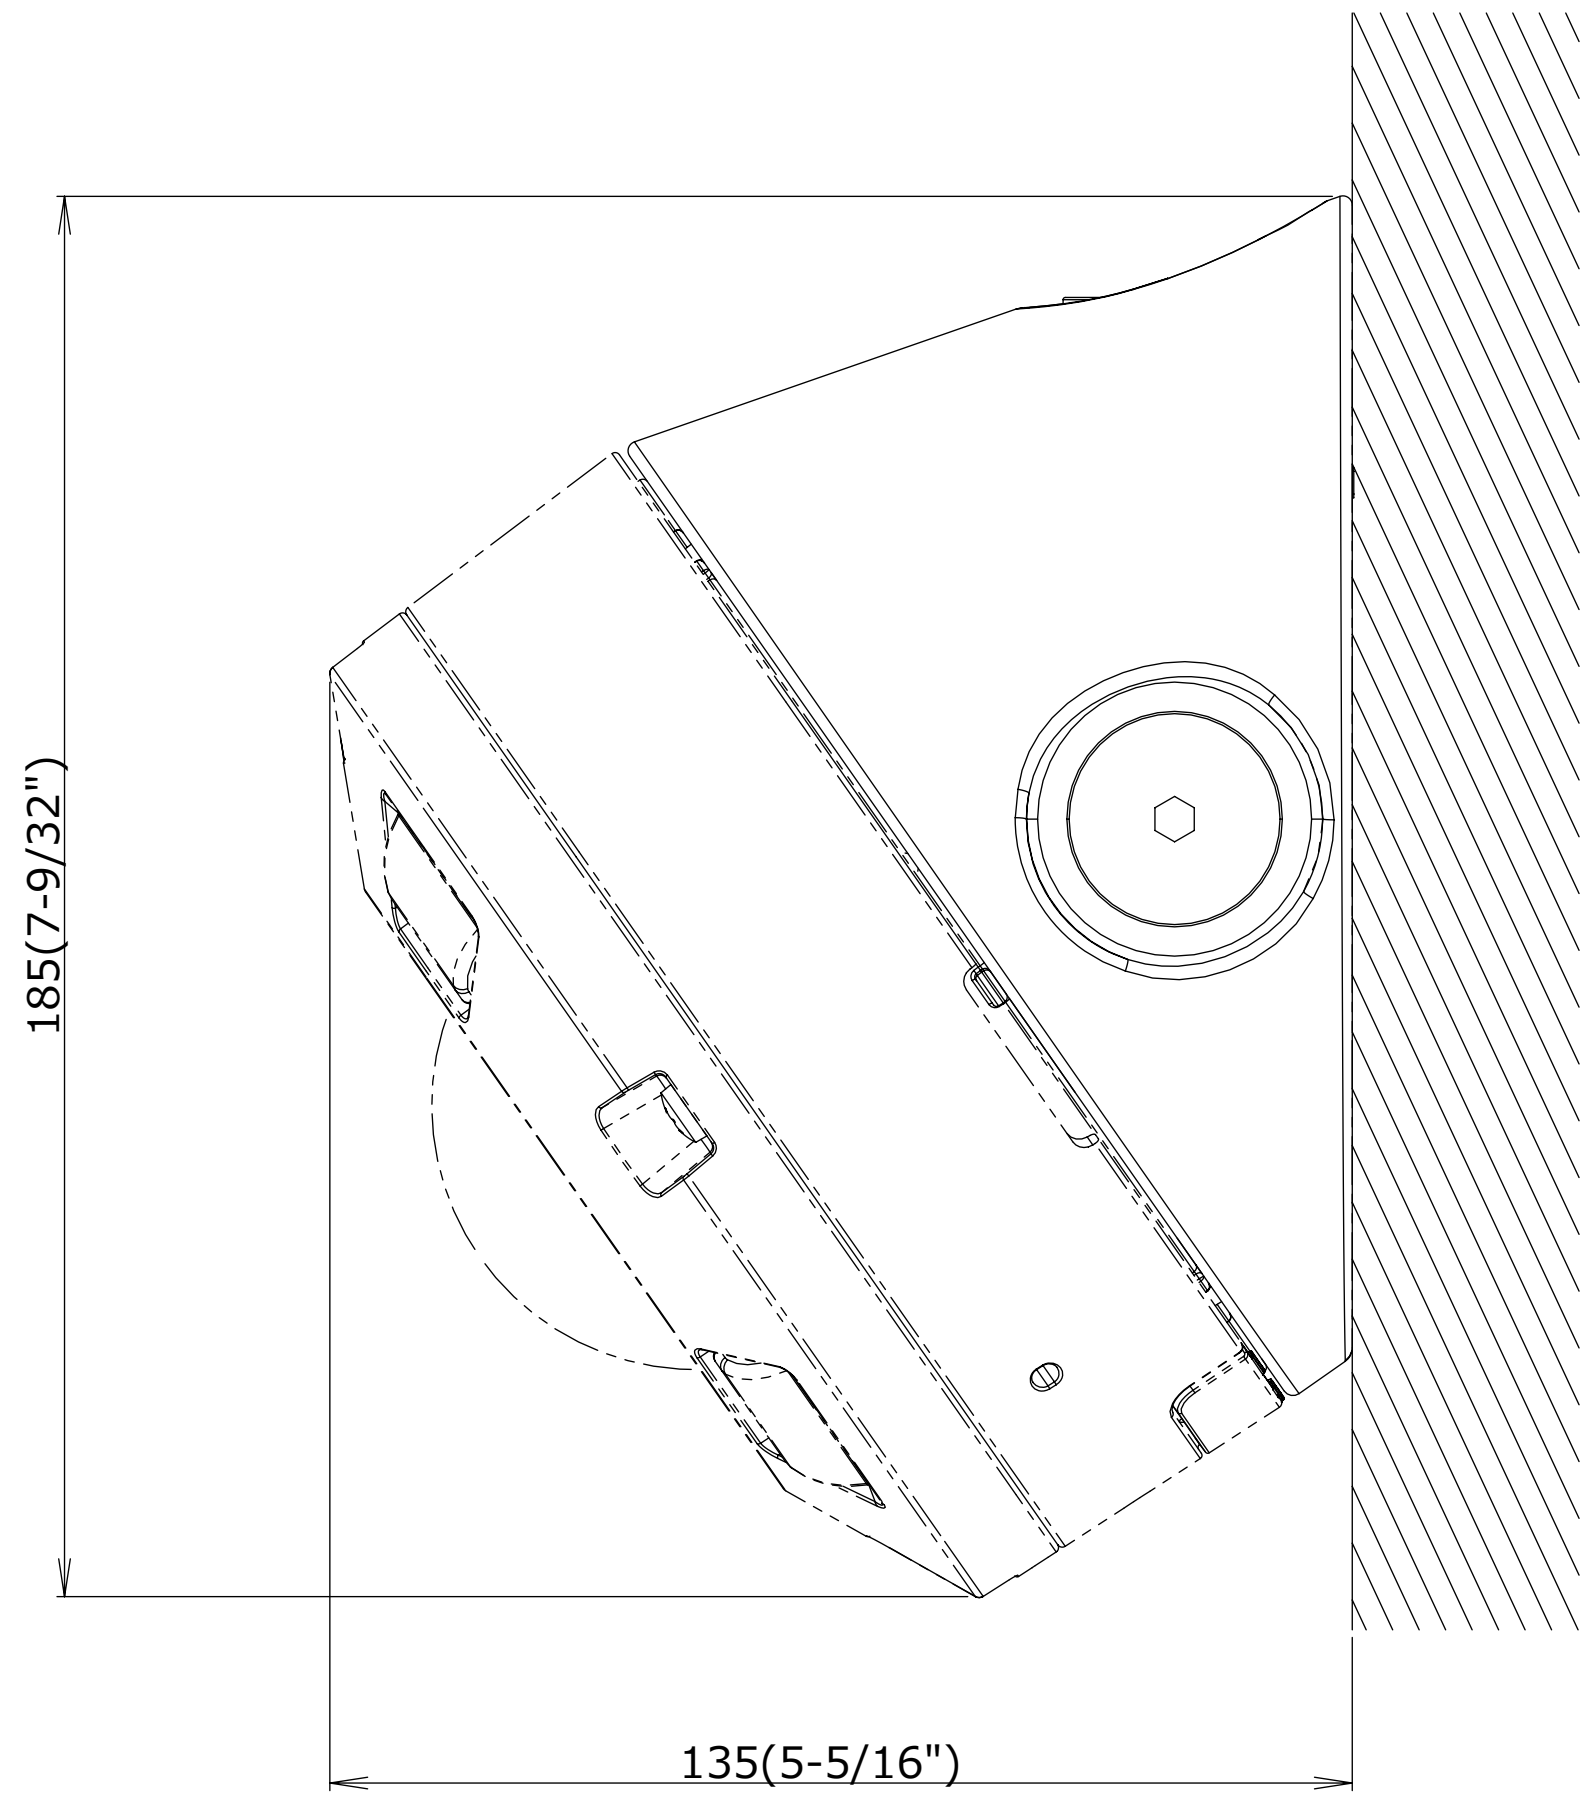


Attach to WV-X45*01-F1L*

	投影面積/Projected area
側面図/Side-view	0.018(m2)

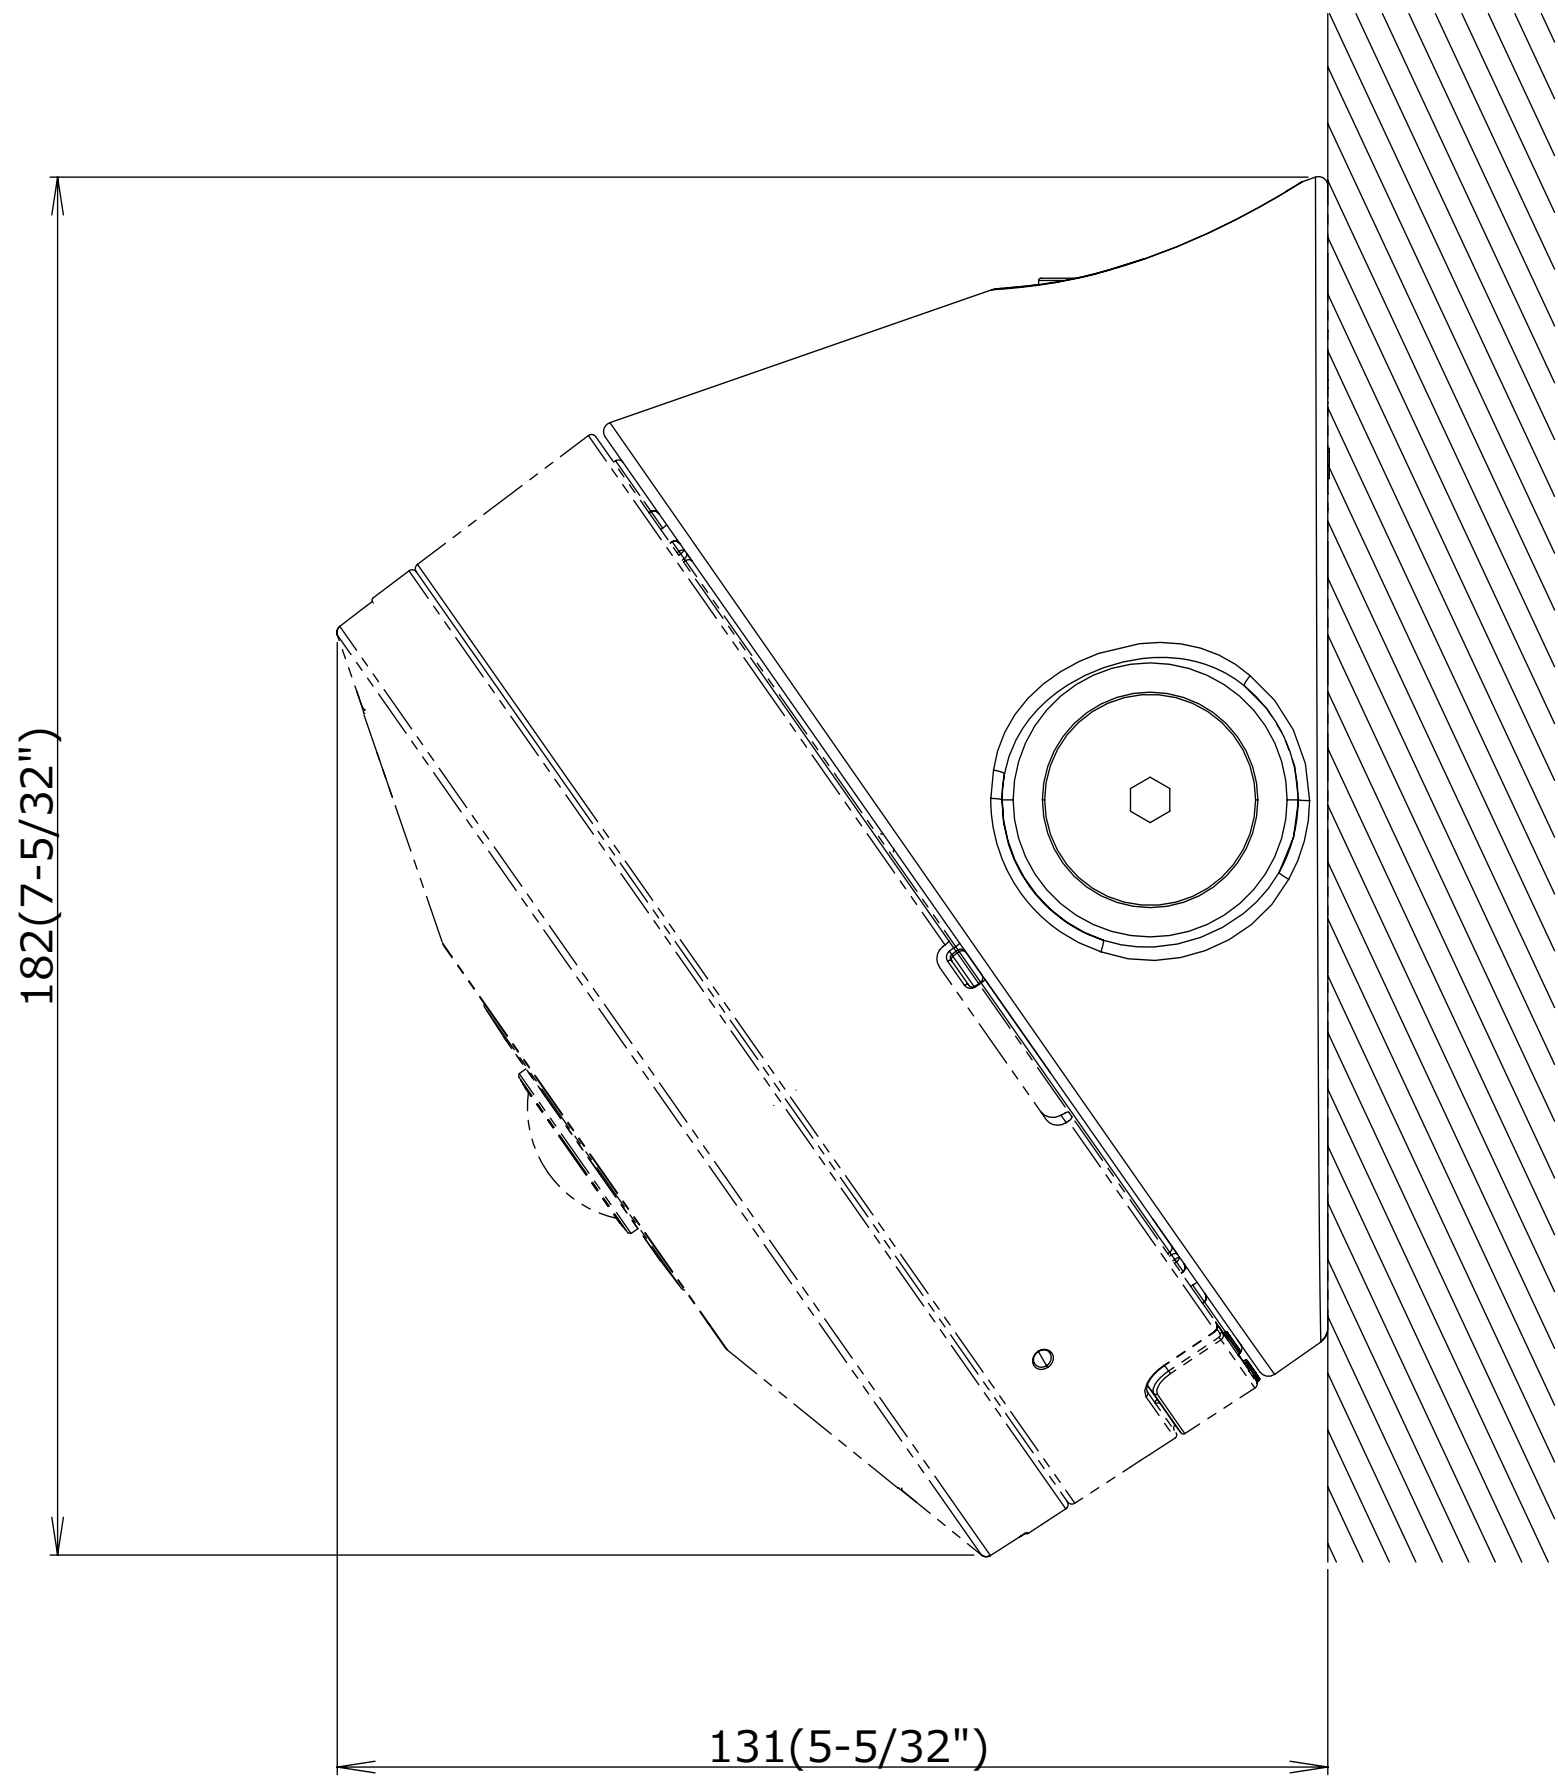

Attach to WV-X41*01-F1*

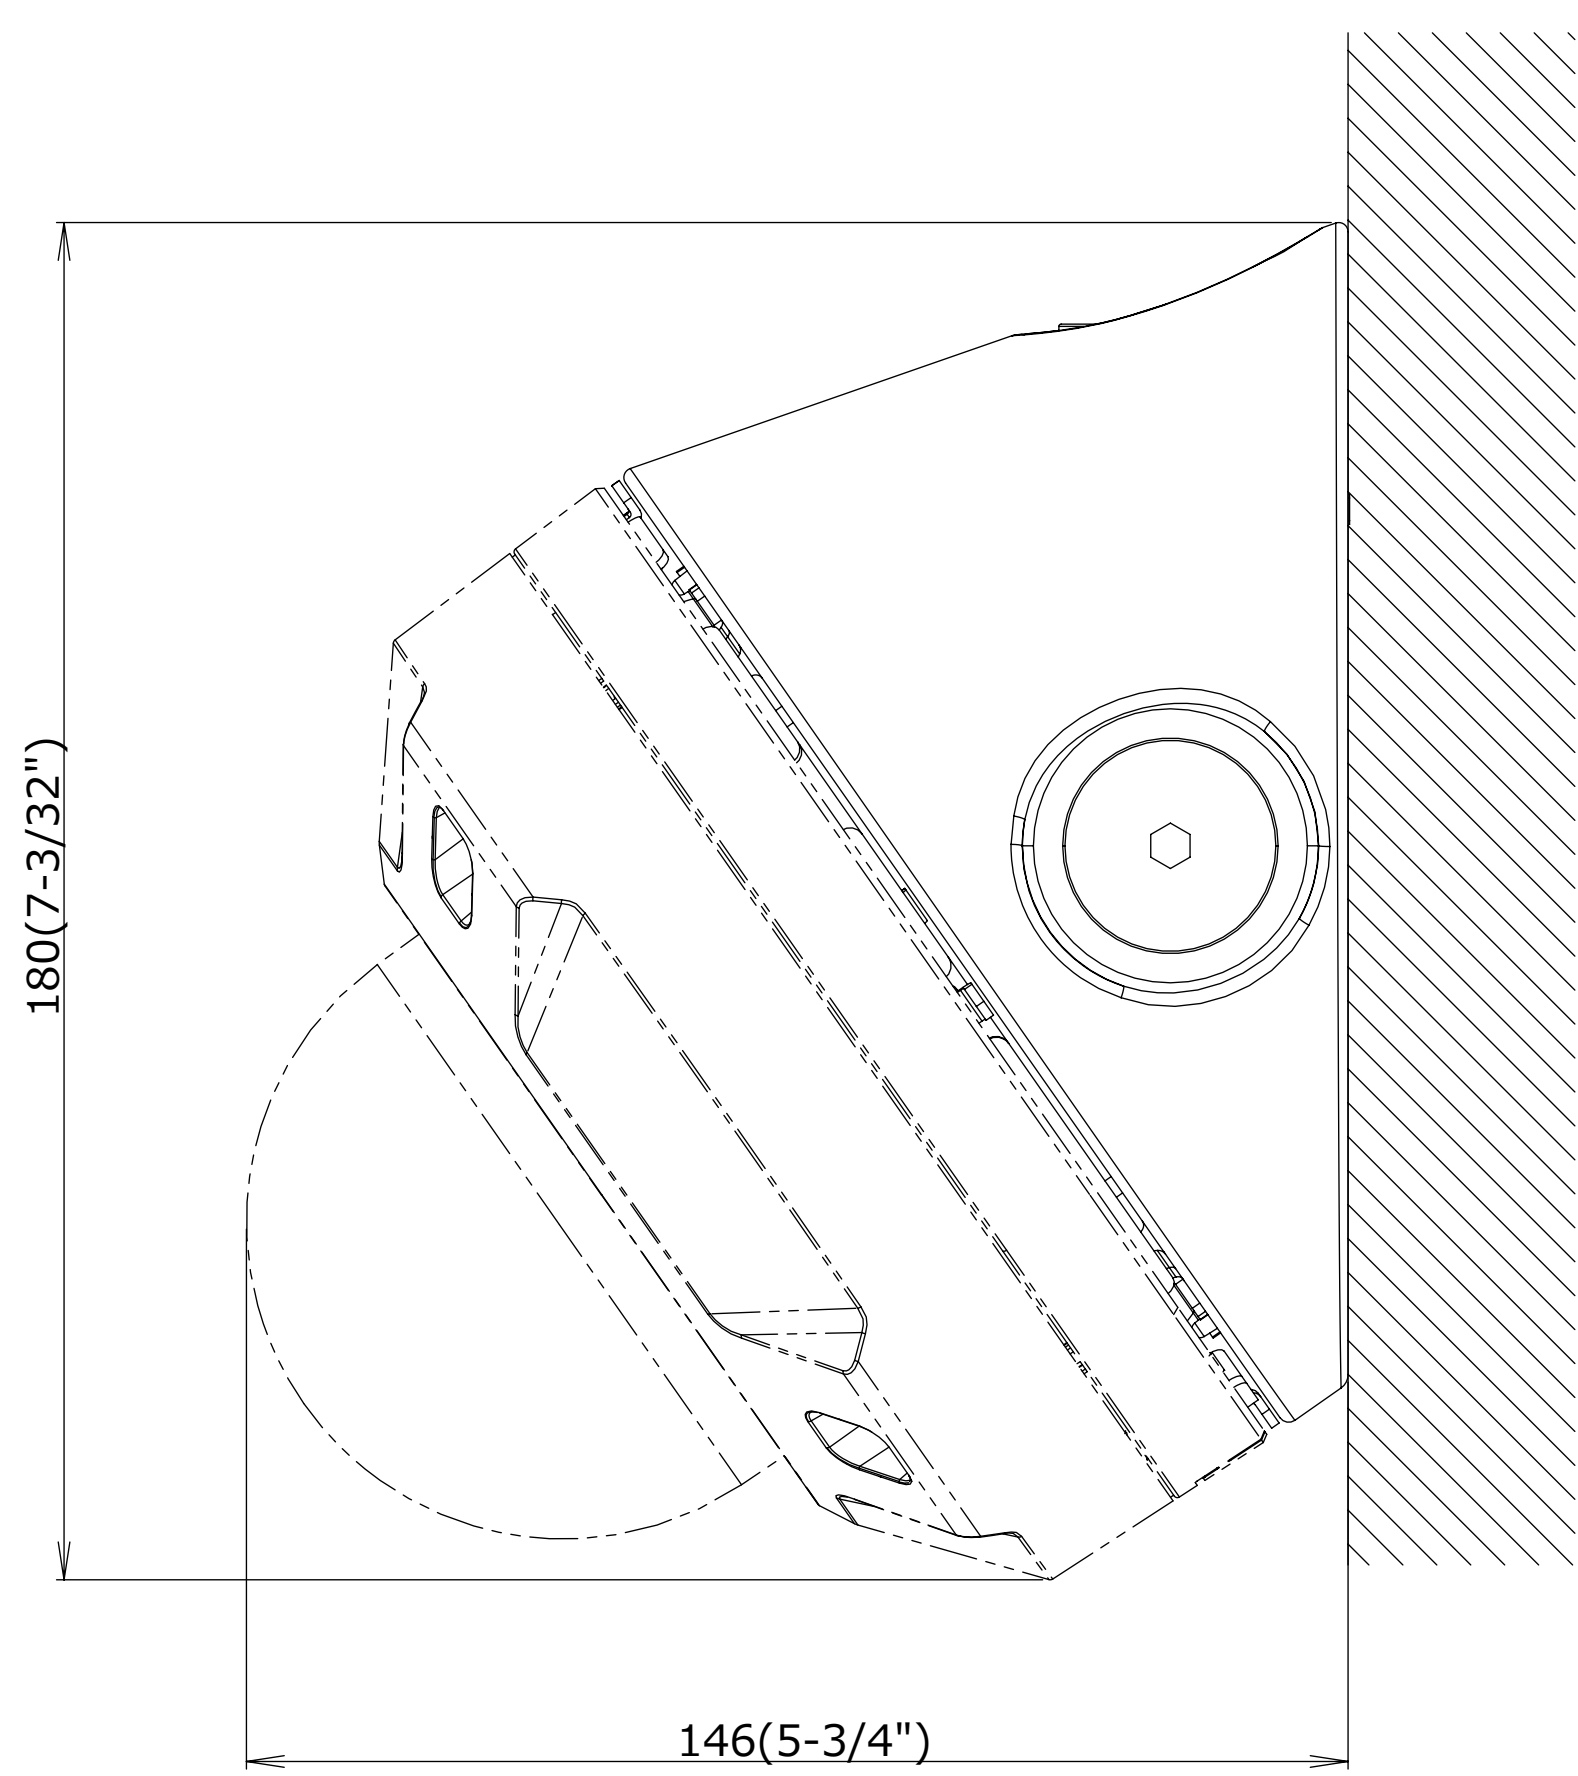


Attach to WV-X25*00-V*LN*

	投影面積/Projected area
側面図/Side-view	0.019(m2)

カメラとの組み合わせ例
Example of combination with a camera

耐重塩害モデル
Heavy salt damage version

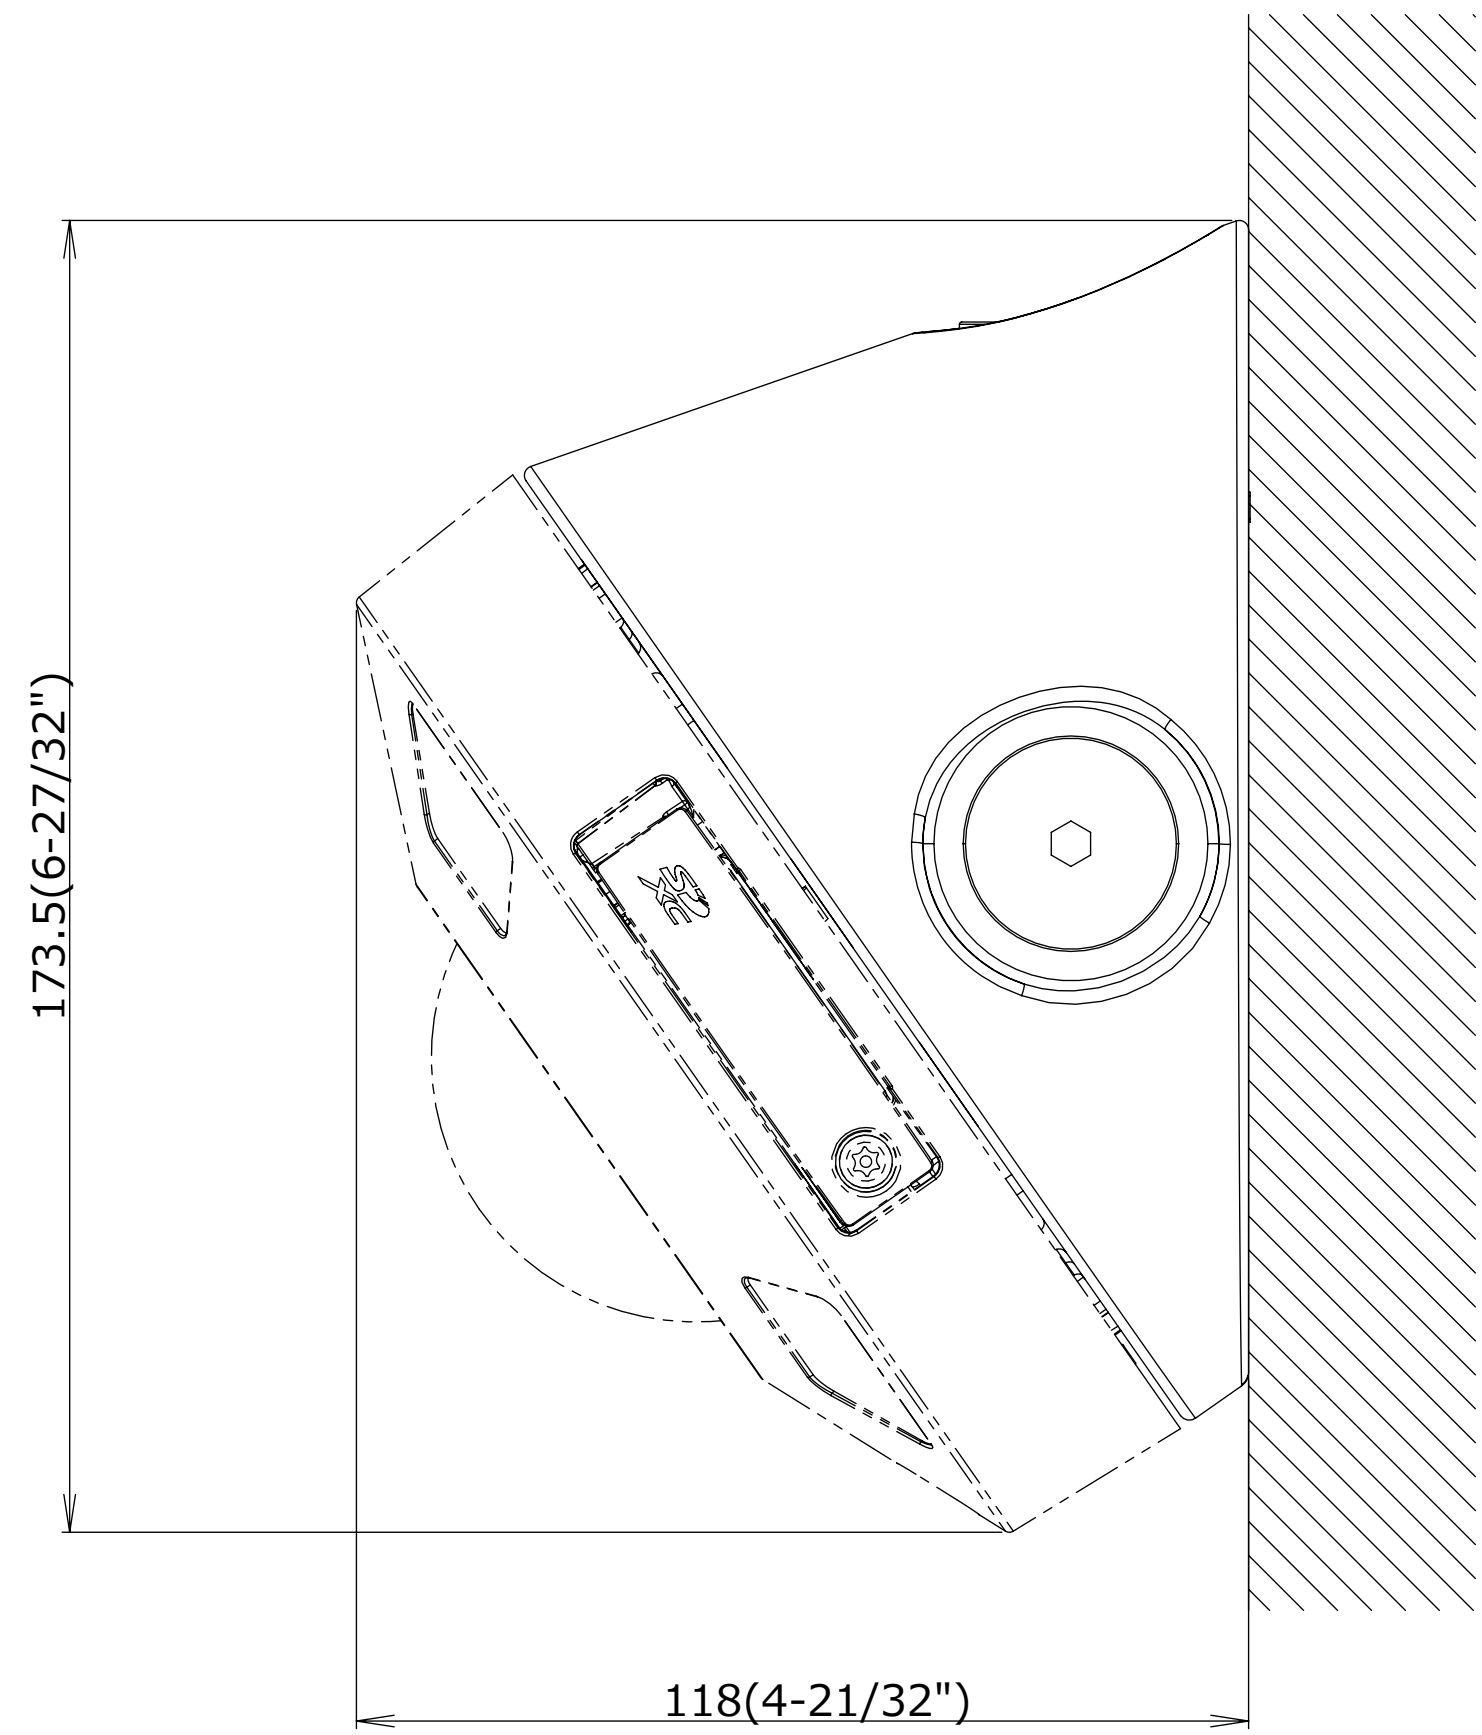

Attach to WV-X45*6LSJ

	投影面積/Projected area
側面図/Side-view	0.015(m2)

Unit:mm

