


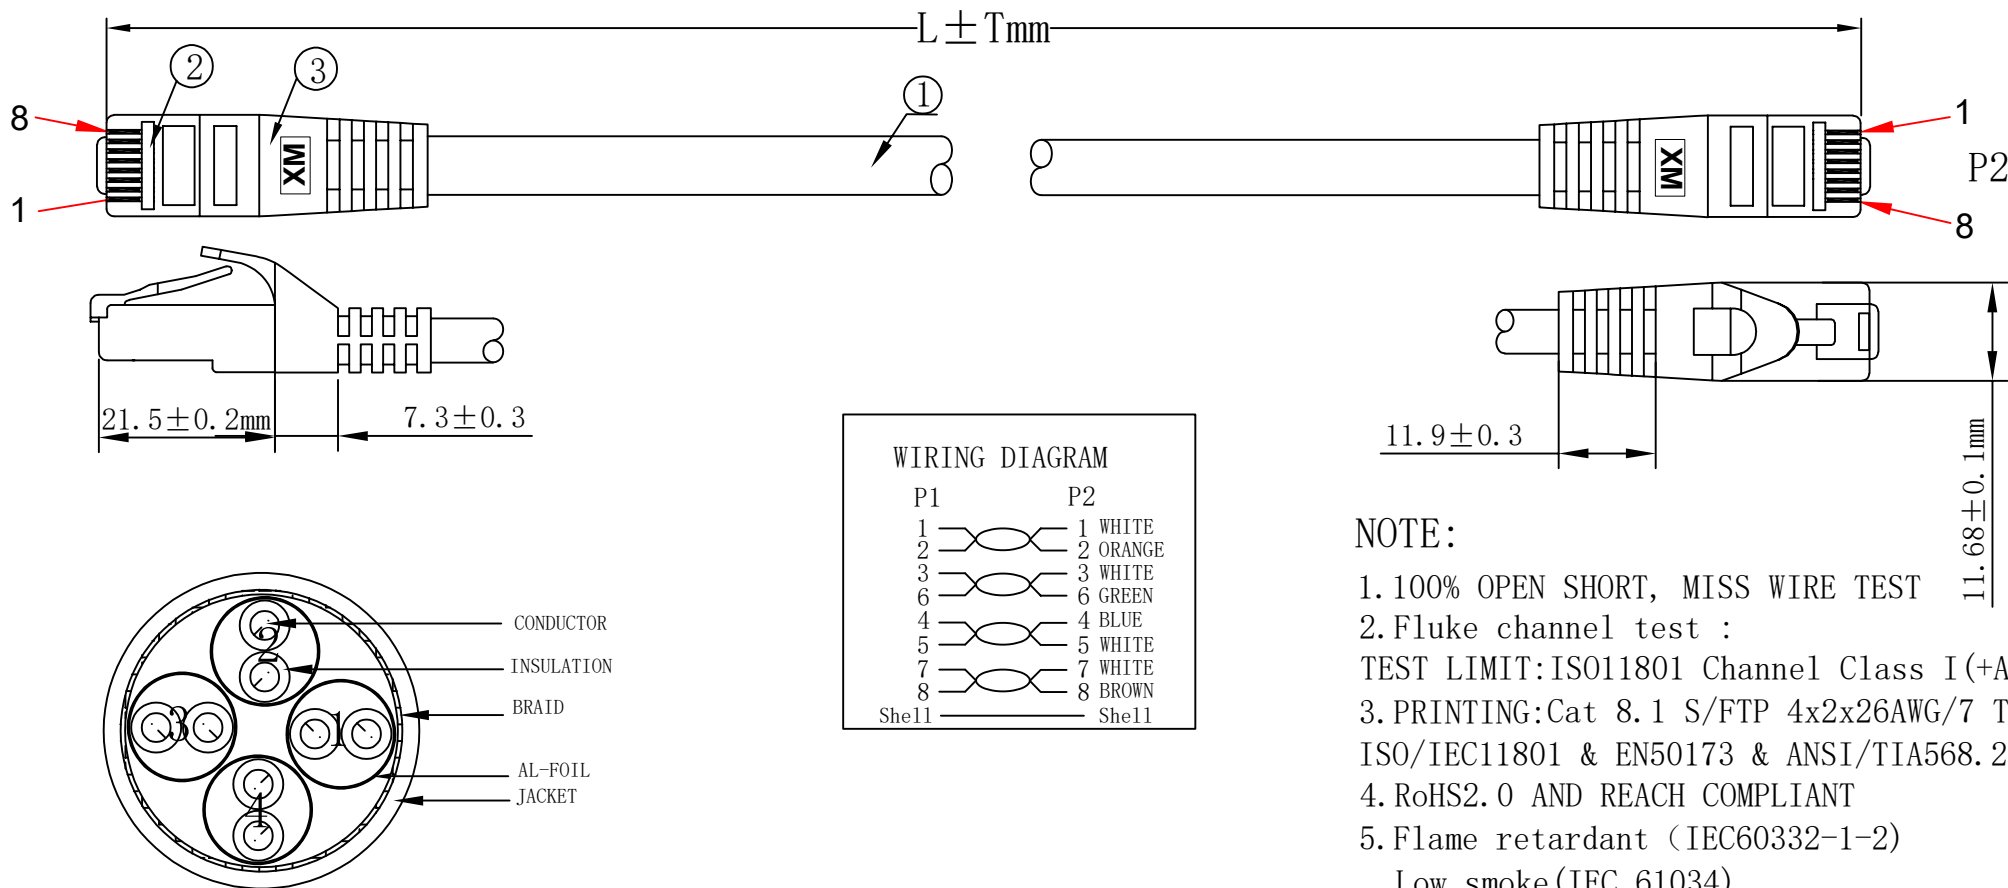

- NOTE:
- 100% OPEN SHORT, MISS WIRE TEST
 - Fluke channel test :
TEST LIMIT:ISO11801 Channel Class I(+ALL)
 - PRINTING:Cat 8.1 S/FTP 4x2x26AWG/7 TPE-LSZH
ISO/IEC11801 & EN50173 & ANSI/TIA568.2-D
 - RoHS2.0 AND REACH COMPLIANT
 - Flame retardant (IEC60332-1-2)
Low smoke(IEC 61034)
Halogen free(IEC 60754-2)
 - GHMT Certified
 - Operating Temperature:-20 ~+75° C
 - Minimum of the bending radius is 4*OD
(Suitable for all meters)

MATERIAL LIST

③	OVER MOLD	75A PVC	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug, Pin Gold Plated 50U", The Shell plated nickel black	2	
①	CABLE	S/FTP CAT. 8 (AWG26 BC*1P+AL-FOIL)*4PAIRS+ BRAID+ JACKET:TPE-LSZH Red(Pantone 199C) OD:6.2±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		ADD THE ITEM	2025-5-29	A1
		NEW	2023-02-01	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

21. 99. 1811	VALUE S/FTP PatchCord Cat. 8. 1 stranded, LSOH, Red	1000±20mm
21. 99. 1812	VALUE S/FTP PatchCord Cat. 8. 1 stranded, LSOH, Red	2000±30mm
21. 99. 1813	VALUE S/FTP PatchCord Cat. 8. 1 stranded, LSOH, Red	3000±50mm
DESC.	DESC.	LENGTH

SECOMP