
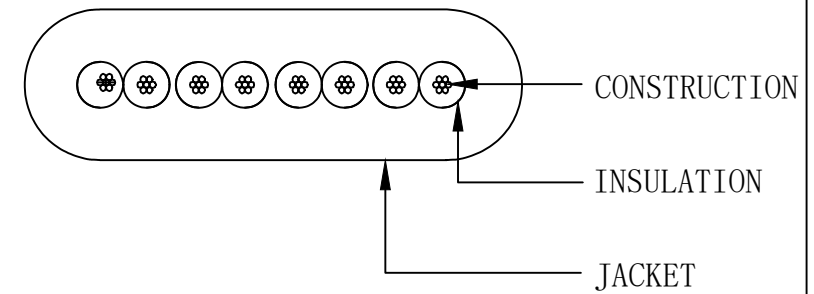


WIRING DIAGRAM



NOTE:

- 100% OPEN SHORT, MISS WIRE TEST
- Fluke test  
Test limit:ISO 11801 CHANNEL CLASS EA
- PRINT WORD:CAT6A U/UTP FLAT 4x2x32AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568C. 2
- ROHS2.0 AND REACH COMPLIANT

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
③	OVER MOLD	PVC Colour White (RAL9003)	2	
②	CONNECTOR	RJ45 8P8C Unshielded Plug, Pin Gold Plated, Transparent blue	2	
①	CABLE	(32AWG BC*1P)*4 JACKET:PVC OD:1.5±0.2*6.0±0.2mm White (RAL9003)	1	

ITEM	LENGTH
21.99.2060	500±30mm
21.99.2061	1000±30mm
21.99.2064	1500±50mm
21.99.2062	2000±50mm
21.99.2063	3000±70mm
21.99.2065	5000±70mm

NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

DESC. VALUE Cat.6A UTP PatchCord white

NEW 2022-06-01 A