


PIN OUT

CN1	CN2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
G	G

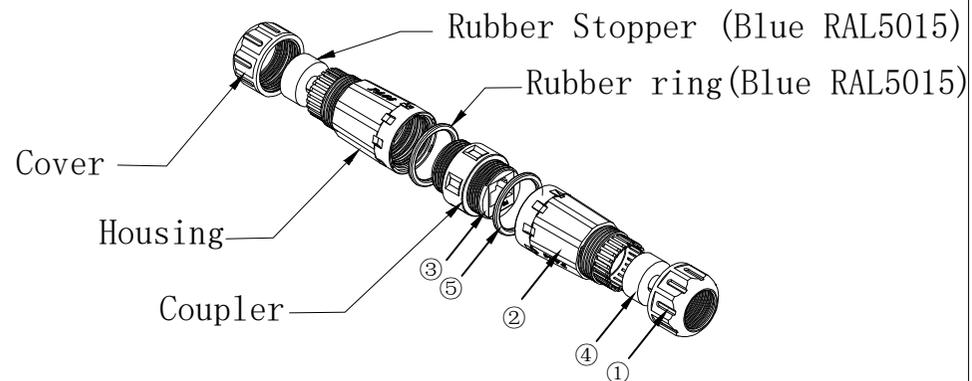

NOTES:
 Fluke Test: ISO 11801 Class E Channel link test
 Operating Temperature: -20°C TO +70°C
 Storage Temperature: -40°C TO 85°C
 Compatible cable OD: Normal 4.5-7.5mm, Maximum support: 9mm
 RoHS and REACH Compliant
 IP68 Grade

MATERIAL LIST:

⑤	ring	Rubber (Blue RAL5015)	2	
④	Stopper	Rubber (Blue RAL5015)	2	
③	Coupler	CAT.6 RJ45 STP Coupler 8P8C, PIN GOLD PLATED Shell NICKEL PLATED	1	
②	Housing	PA66 Black	2	
①	Cover	PA66 Black	2	
NO	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
		NEW	2026-01-19	
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

ITEM	COLOR
21.99.3000A	Black

DESC. RJ45 Coupler, CAT.6, IP68 STP, Dust- / Waterproof

SECOMP