
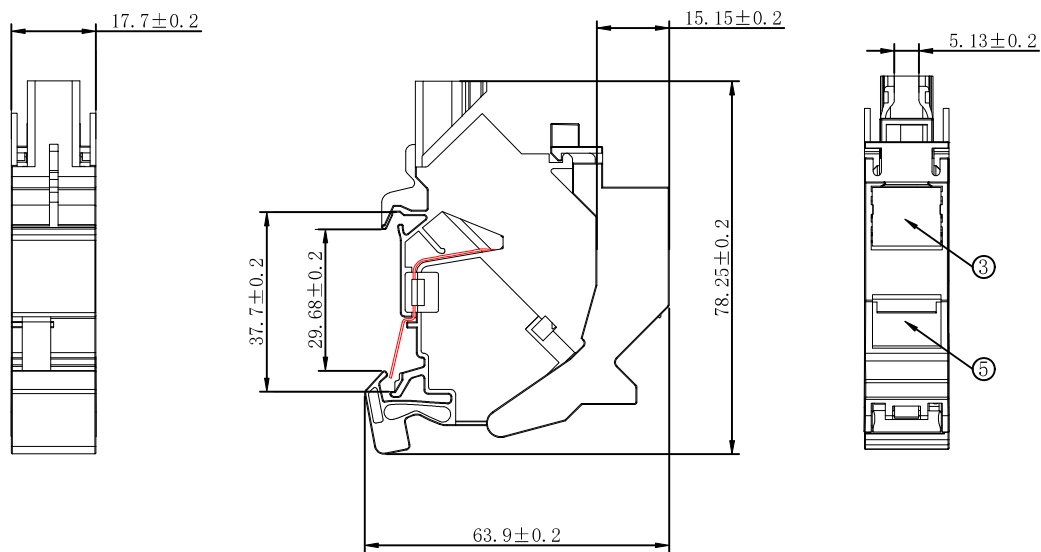


NOTE:

Storage Temperature: -40℃~+70℃
Operation Temperature:-10℃~+60℃
RoHS and REACH Compliant.

MATERIAL LIST:



⑤	Dust Cap	ABS Gray	1	
④	Ground	Stainless Steel	1	
③	Title block	Transparent	1	
②	Top Cap	ABS Gray	1	
①	Housing	ABS Gray	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

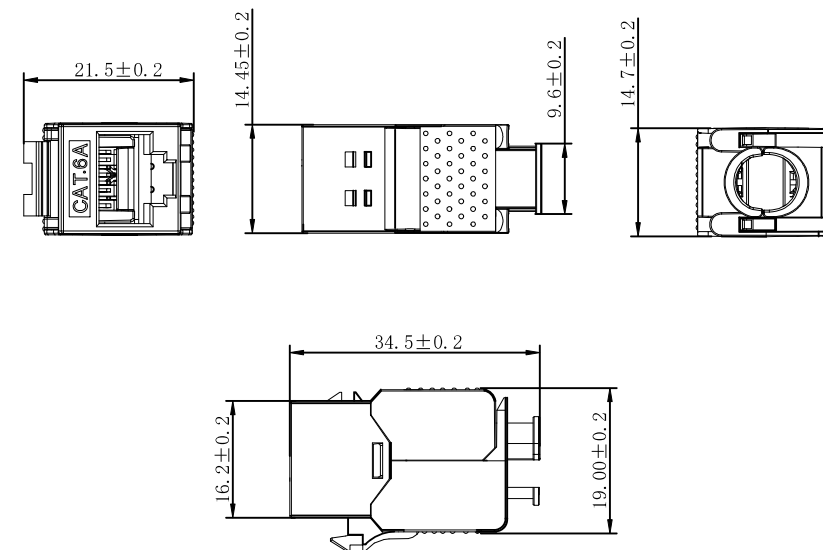

26.11.0379	ROLINE RJ45 DIN Rail Keystone Jack Holder + Keystone
ITEM NO.	DESC.

			NEW	2025-04-02	A
BY	CHK		REVISION RECORD MODIFICATIONS	DATE	REV.

SECOMP

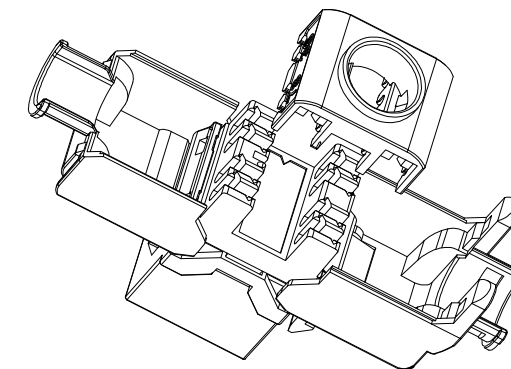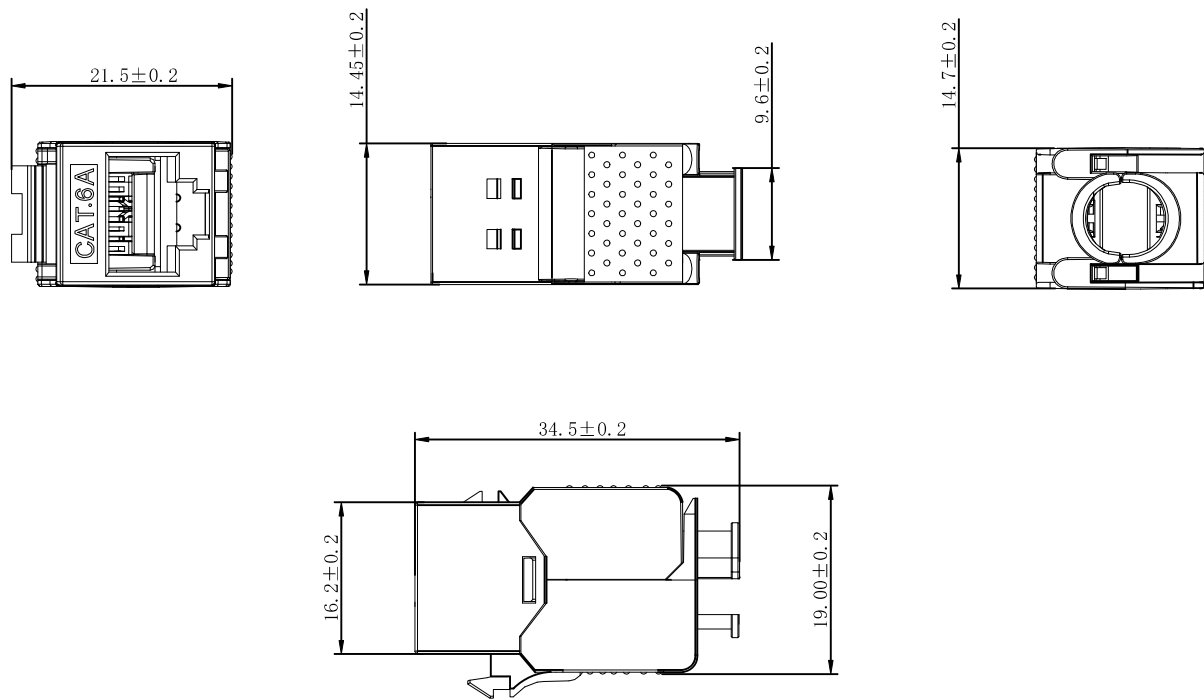

NOTES:

ELECTRICAL:

- 1.Contact Resistance : 20MΩ MAX
- 2.Insulation Resistance : 500MΩ MIN @ 500V DC
- 3.Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
- 4.Compliance with Class EA up to 500 MHz to ISO/IEC 11801 Ed.2.2:2011-06
DIN EN 50173-1:2011-09
TIA/EIA-568.2-D (2009-08)
IEC 60603-7 Ed.1 (12/2008)
- 5.Fluke Test:Permanent Link ISO 11801 (PL2)Class Ea

ENVIRONMENTAL:

- 1.Storage temperature : -40℃ TO+70℃
- 2.Operation temperature : -10℃ to+60℃

MECHANICAL

- 1.SHIELD MATERIAL: ZINC ALLOY
 - 2.IDC MATERIAL: PC TERMINAL:PHOSPHOR BRONZE, TIN PLATING
 - 3.RJ45 Contact Life: 750 Times Min
 - 4.Plug inforce:<30N
 - 5.Solid cable:1/22AWG(0.65MM)-1/26AWG(0.40MM) ID:1.05MM-1.5MM
 - 6.Cable OD: 5.0mm-8.0mm
 - 7.PoE per IEEE 802.3af, PoE+ per IEEE 802.3at
- RoHS 2011/65/EU and amendment directives (EU) 2015/863 compliant;REACH 1907/2006/EC compliant.

Accessories:

Instruction Sheet *1pc/inner box
Cable Tie(75X1.9mm) *1Pc

MATERIAL LIST:

⑦	MODULAR COVER	PC White	1	
⑥	RJ 45 JACK INSERT	PHOSPHOR BRONZE 8P8C GOLD PLATED	8	
⑤	PCB	1.2mm UL 94V0	1	
④	IDC BODY	PC White	1	
③	IDC PIN	PHOSPHOR BRONZE & TINNED	8	
②	LABEL COLOR CODE	T568A/B	2	
①	IDC TERMINAL	FOR 22-26AWG(0.40mm-0.65mm) CABLE	1	
NO	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK

		NEW	2025-04-02	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

26.11.0379	ROLINE RJ45 DIN Rail Keystone Jack Holder + Keystone
ITEM NO.	DESC.

SECOMP