
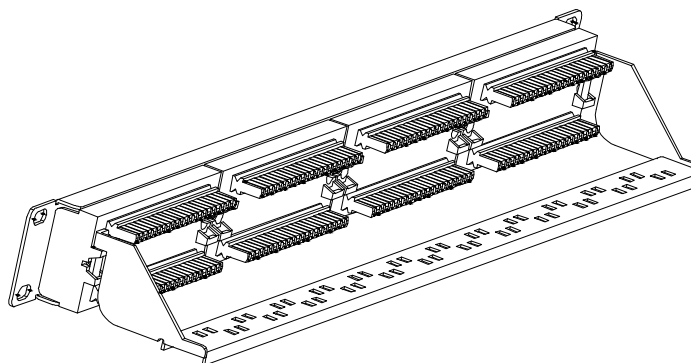


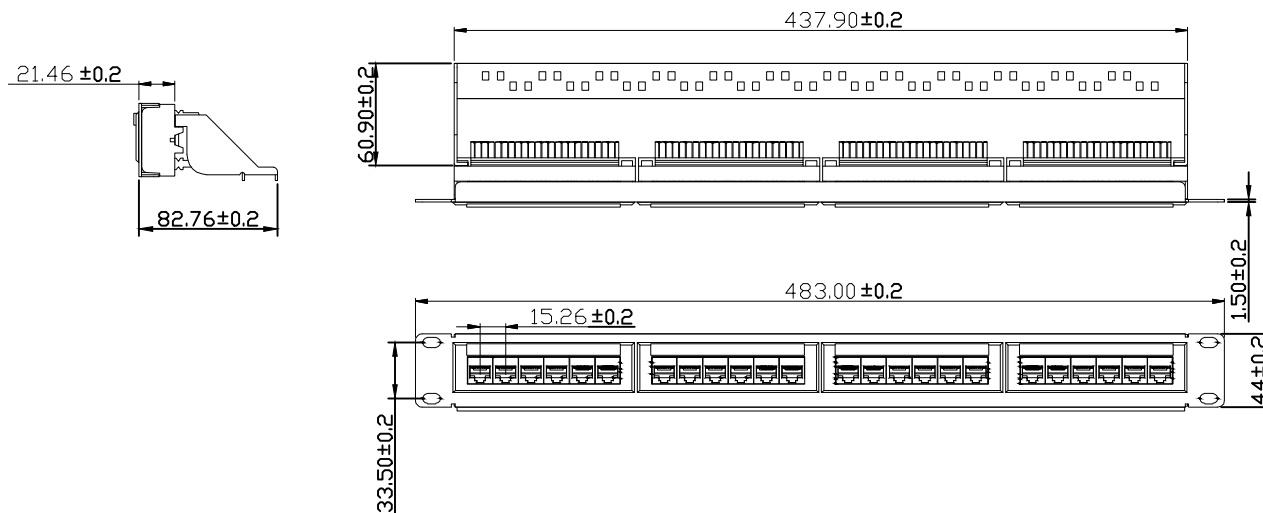

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125V AC RMS
2. CURRENT RATING : 1.5A mp
3. CONTACT RESISTANCE : 100 MILLI OHMS MAX
4. INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
5. DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
6. CAT. 6a PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 C.2

ISO/IEC 11801 Ed. 2. 2:2011-06
DIN EN 50173-1:2011-09

ENVIRONMENTAL:

1. STORAGE : -40 TO+85°C
 2. OPERATION : 0 TO+70°C
- RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-5
MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL

1. HOUSING MATERIAL PBT+15%GF UL94V0
2. CONTACT MATERIAL PHOSPHOR BRONZE PLATING GOLD
3. IDC MATERIAL: PC UL94V0 TERMINAL:PHOSPHOR BRONZE, TIN PLATING
4. RJ45 JACK LIFE: 750 TIMES MIN
5. IDC LIFE : 200 TIMES MIN
6. Solid cable:1/22AWG (0.65MM) -1/26AWG (0.41MM) ID:0.8MM-1.6MM
7. Cable OD: 5.0mm-8.5mm

Accessory:

1. Cable Tie(75×1.9mm) ×24Pcs
2. Instruction Sheet
3. Screw M6*18mm x 4pcs

RoHS AND REACH COMPLIANT

MATERIAL LIST:

⑦	Bracket	1.2mm thickness Metall Panel with plastic powder cladding	1	
⑥	Bottom Panel	1.5mm thickness Metall Panel with plastic powder cladding	1	
⑤	RJ45 Jack	Housing-Fireproof PBT UL-94V0 Pin-8P8C 3u" gold plated	24	
④	PCB	1.6mm UL-94V0	3	
③	IDC Body	Fireproof PC/ABS UL-94V0 With T568A/T568B Color label	24	
②	IDC Pin	Phosphor Bronze & Tinned	192	
①	IDC Terminal	For 22-26 AWG Cable	24	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

		NEW	2018-08-29	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

ITEM NO.	DESC. DESC.
26. 99. 0357	CAT. 6A UTP 24PORT PATCH PANEL

SECOMP