



TP-Link Omada SX3032F netwerk-switch Managed L2+ Zwart



Merk : TP-Link

Productfamilie: Omada


Artikelcode: SX3032F

Productnaam : SX3032F

TP-Link Omada SX3032F. Switch type: Managed, Switch-laag: L2+. Aantal basis-switching RJ-45 Ethernet-poorten: 1, Aantal geïnstalleerde SFP+ modules: 32, Console port: RJ-45/Micro-USB. MAC-adrestabel: 32000 entries, Switchingcapaciteit: 640 Gbit/s. Netwerkstandaard: IEEE 802.1Q, IEEE 802.1ab, IEEE 802.1p, IEEE 802.1x, IEEE 802.3ah, IEEE 802.3x. Rack-montage

Management features		Security	
Switch type *	Managed	SSH/SSL support	✓
Switch layer	L2+	Loop protection	✓
Quality of Service (QoS) support	✓	IP-MAC-Port binding	✓
Cloud-managed	✓	Authentication	MAC-based authentication, Port-based authentication
ARP inspection	✓	Password protection	✓
Configuring Location Settings (CLI)	✓	Authentication type	AAA, TACACS+
	• MIB II (RFC1213) • Interface MIB (RFC2233) • Ethernet Interface MIB (RFC1643) • Bridge MIB (RFC1493) • P/Q-Bridge MIB (RFC2674) • RMON MIB (RFC2819) • RMON2 MIB (RFC2021) • Radius Accounting Client MIB (RFC2620) • Radius Authentication Client MIB (RFC2618) • Remote Ping, Traceroute MIB (RFC2925) • Support TP-Link private MIB	Queue scheduling algorithms	Priority queuing (PQ), SP, Weighted Round Robin (WRR)
MIB support		Multicast features	
		Multicast support	✓
		Number of multicast groups filtered	4000
		Multicast Listener Discovery (MLD) snooping	Yes
Ports & interfaces		Protocols	
Basic switching RJ-45 Ethernet ports quantity *	1	GARP VLAN Registration Protocol (GVRP)	✓
Installed SFP+ modules quantity *	32	IPv4 & IPv6 features	Dual stack IPv4/IPv6, ICMPv6, IPv6 TFTP
Console port	RJ-45/Micro-USB	IP Source Guard (IPSG)	✓
Network		Design	
Networking standards *	IEEE 802.1Q, IEEE 802.1ab, IEEE 802.1p, IEEE 802.1x, IEEE 802.3ah, IEEE 802.3x	Rack mounting *	✓
Port mirroring	✓	Product colour	Black
Flow control support	✓	Redundant fans support	✓
Link aggregation	✓	Number of fans	2 fan(s)
Broadcast storm control	✓	Power	
Rate limiting	✓	Power source *	AC
Spanning tree protocol	✓	Power supply included *	✓
IPv4 routes	48	AC input voltage	100 - 240 V
IPv6 routes	48	AC input frequency	50/60 Hz
VLAN support	✓	Power consumption (max)	49.4 W
Virtual LAN features	Protocol-based VLAN, SSID-based VLAN assignment, Tagged VLAN, VLAN mapping, Voice VLAN	Operational conditions	
Number of VLANs	30	Operating temperature (T-T)	-5 - 45 °C
		Storage temperature (T-T)	40 - 70 °C
		Operating relative humidity (H-H)	10 - 90%
		Storage relative humidity (H-H)	5 - 90%
Data transmission		Weight & dimensions	
Switching capacity *	640 Gbit/s	Width	440 mm
Forwarding rate	240 Mpps	Depth	330 mm
MAC address table *	32000 entries	Height	44 mm

Data transmission		Packaging content	
Number of queues	8	Cables included	Power
Static route	✓	Quick start guide	✓
Number of static routes	128	Certificates	
Number of IP interfaces	128	Compliance certificates	CE, Federal Communications Commission (FCC), RoHS
Jumbo frames support	✓		
Jumbo frames	9		
Packet buffer memory	24 MB		
Security			
DHCP features	DHCP relay, DHCP server, DHCPv6 snooping		
Access Control List (ACL)	✓		
IGMP snooping	✓		
Static port security	✓		

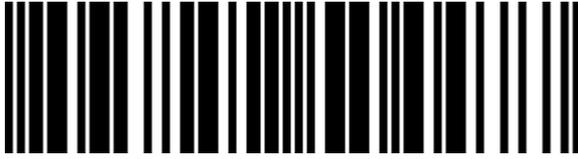

4895252504477



4895252504484

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.