

Zyxel XMG1915-10E Managed L2 2.5G Ethernet (100/1000/2500)

Merk : Zyxel


Artikelcode: XMG1915-10E-EU0101F



Productnaam : XMG1915-10E

Zyxel XMG1915-10E. Switch type: Managed, Switch-laag: L2. Type basis-switching RJ-45 Ethernet-poorten: 2.5G Ethernet (100/1000/2500), Aantal basis-switching RJ-45 Ethernet-poorten: 8. MAC-adrestabel: 16000 entries, Switchingcapaciteit: 80 Gbit/s. Netwerkstandaard: IEEE 802.1p, IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3at, IEEE 802.3az, IEEE 802.3bt, IEEE 802.3bz,.... Rack-montage

Beheerfuncties		Multicast-functies	
Switch type *	Managed	Multicast-functies	Multicast-doorsturen
Switch-laag	L2	Design	
Quality of Service (QoS)	✓	Rack-montage *	✓
Poorten & interfaces		LED-indicatoren	✓
Aantal basis-switching RJ-45 Ethernet-poorten *	8	Prestatie	
Type basis-switching RJ-45 Ethernet-poorten *	2.5G Ethernet (100/1000/2500)	Intern geheugen	256 MB
Aantal moduleslots SPF+	2	Flash memory	32 MB
Netwerk		Upgraden van firmware mogelijk	✓
Netwerkstandaard *	IEEE 802.1p, IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3at, IEEE 802.3az, IEEE 802.3bt, IEEE 802.3bz, IEEE 802.3x, IEEE 802.3z	Mean time between failures (MTBF)	646,958 uur
10G support *	✓	Energie	
VLAN=ondersteuning	✓	Stroombron *	AC
Virtuele LAN-functies	MAC address-based VLAN, Port-based VLAN, Voice VLAN	Vermogenstoevoer inclusief *	✓
Data-uitwisseling		AC-ingangsspanning	100 - 240 V
Switchingcapaciteit *	80 Gbit/s	AC-ingangsfrequentie	50/60 Hz
Verzending snelheid	59,5 Mpps	Vermogensverbruik (max)	13,13 W
MAC-adrestabel *	16000 entries	Power over Ethernet (PoE)	
Jumbo Frames ondersteuning	✓	Power over Ethernet (PoE) *	✗
Jumbo frames	12000	Eisen aan de omgeving	
Packet buffergeheugen	1,5 MB	Bedrijfstemperatuur (T-T)	0 - 40 °C
Beveiliging		Temperatuur bij opslag	-40 - 70 °C
DHCP-functies	DHCP client, DHCP relay, DHCP snooping	Relatieve vochtigheid in bedrijf (V-V)	5 - 95 procent
IGMP snooping	✓	Luchtvochtigheid bij opslag	5 - 95 procent
Ondersteunde beveiligingsalgoritmen	SNMP, SNMPv2, SNMPv3	Gewicht en omvang	
MAC adres filtering	✓	Breedte	250 mm
SSH/SSL support	✓	Diepte	104 mm
Authenticatie type	RADIUS	Hoogte	27 mm
Multicast-functies		Gewicht	780 g
Multicast-ondersteuning	✓	Inhoud van de verpakking	
		Meegeleverde kabels	AC

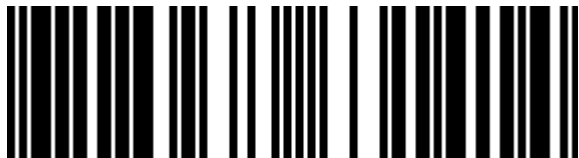

4718937631414

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 01-NOV-2024. Prints or copies of Information are only valid on the printed Publication date