





## 8-Port Rack Mount USB KVM Switch TK-803R

The 8-Port USB KVM Switch lets you manage multiple computers with just one set of keyboard, monitor and mouse. This rack mount device supports USB and PS/2 interface on both the console and the PC side. Popular hardware platforms such as PC, Linux and Mac are supported. Users can switch between PCs using hot-key or push button for flexible management. Users can also hot-plug PCs on the fly to avoid downtime. The 8-Port USB KVM Switch is the perfect choice for managing multiple PC's.

### FEATURES • 8-Port USB KVM Switch


- Supports both USB and PS/2 Interface for console port
- · Supports Microsoft IntelliMouse, IntelliMouse Explorer, Logitech NetMouse, Optical Mouse, and more
- Supports Windows 98SE/ME/ 2000/XP/2003 Server, Linux, Mac OS and more
- High video quality; up to 2048 x 1536 VGA resolution
- · Firmware upgradeable via PC port
- Auto-Scan for monitored PCs with adjustable scan interval from 10-99 seconds
- · Keyboard status restored when switching between PCs
- · LEDs display for easy status monitoring
- Beeping sound for port switching confirmation (enable/disable)
- · Hot-Key or push button switching
- · Plug & Play and Hot-Pluggable
- Standard 19" (1U) rack mount design
- 2-Year Warranty

# 8-Port Rack Mount USB KVM Switch TK-803R

#### **SPECIFICATIONS**

Hardware		
Management	• 8 Computers	
Standard	USB 1.1 Compliant	
PC Ports	8 x VGA HDB 15-pin (female)	
Console Port	• 1 x USB (Type A) / PS/2 (6-pin Mini Din) Mouse	
	• 1 x USB (Type A) / PS/2 (6-pin Mini Din) Keyboard	
	• 1 x VGA HDB 15-pin (female)	
Cable Interface (Optional, not included)	• To KVM: 1 x VGA HDB 15-pin (male)	
	• To PC: 1 x VGA HDB 15-pin (male), 1 x USB (Type A)	
Supported OS	Windows 98(SE)/ME/ 2000/XP/2003 Server, Linux, Mac and More	
PC Selection	Hot-Key or Push Buttons	
Auto-Scan Interva	10-100 seconds (Programmable through Hot-Key)	
LEDs	On-line (Red), Select (Green)	
Keyboard Status	Saved & Restored	
Power Adapter	9V DC 1A External Power Adapter	
Dimension (W x H x D)	• 407 x 165 x 45mm (16.0 x 6.5 x 1.8in.)	
Weight	• 1.83 kg (4.0 lb)	
Temperature	Operating: 0 °C~40 °C (32 °F~104 °F) Storage: -20 °C~60 °C (-4 °F~140 °F)	
Humidity	• 0%~80% (non-condensing)	
Certification	• CE, FCC	

#### **NETWORKING SOLUTIONS**

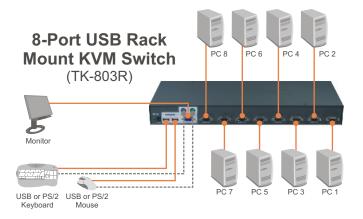

#### PACKAGE CONTENTS

- TK-803R
- · Multi-Language Quick Installation Guide
- Power Adapter (9V DC, 1A)
- Rack Mount Kit

## RELATED PRODUCTS

TK-CU05/CU10/CU15	5/10/15 Feet USB KVM Cable
TK-801R	8-Port Rack Mount KVM Switch
TK-1603R	16-Port Rack Mount USB KVM Switch

#### ORDERING INFORMATION

# **TREND**net

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500 Fax: 1-310-961-5511 Web: <u>www.trendnet.com</u> Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

