

STANDARD UTP Patch Cord Cat.5e (Class D), beige, 7 m

Product No.

11.55.1407


SECOMP®

Manufacturer

SECOMP

Manufacturer No.

11.55.1407

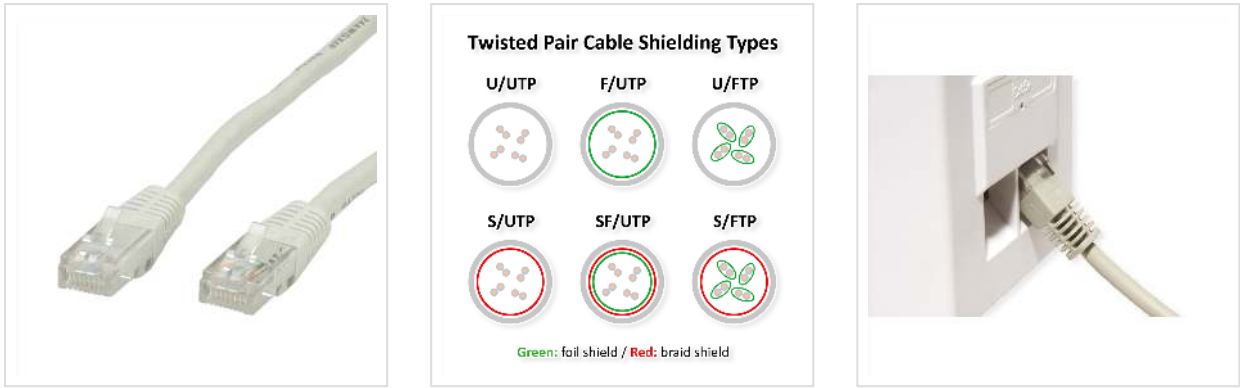

Pre-assembled Cat.5e (Class E) U/UTP Patch Cord with RJ-45 connectors and kink protection - ideal for LAN environments, patch panels, and to connect end-user devices like computers.

- Patch Cord for networking connections between devices.
- Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends.
- Durable due to moulded kink protection.
- Flexible cable, suitable for narrow bending.
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard.
- Construction: 4-pair stranded wire.

Technical specifications	
Manufacturer	SECOMP
Product group	Twisted Pair Cable
Product type	U/UTP patch cord
Colour	beige
Length	7 m
Scope of delivery	Patch Cord

Shield type	U/UTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Inner conductor material	CCA (Copper Clad Aluminum)
Conductor type	Stranded
Crossed	no
Bend radius	36,8 mm
Assignment	1:1
Locking lever	no
Anti-kink sleeve	Moulded-on
Colour (Spout)	beige
External cable diameter	4,6 mm +/- 0,3 mm
Cable LSOH	no
Material (external cable mantle)	PVC
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Weight	123 g
Height of packaging (single piece)	30 mm
Width of packaging (single piece)	100 mm
Depth of packaging (single piece)	100 mm

Package weight (single piece)	0.12 kg
-------------------------------	---------