
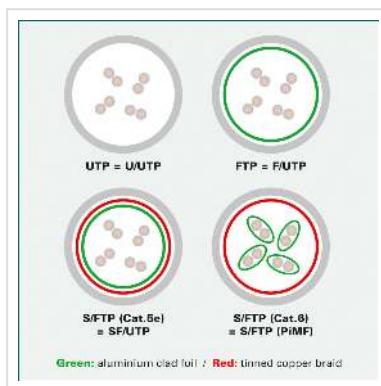


DÄTWYLER patch cable CU 7702 flex LSOH, Hirose TM21, Cat.6 (Class E), green, 1 m

| | |
|---------------------------|---------------|
| Product No. | 21.05.0013 |
| Manufacturer | SECOMP |
| Manufacturer No. | 21.05.0013 |
| EAN (single piece) | 7611990755967 |

SECOMP®

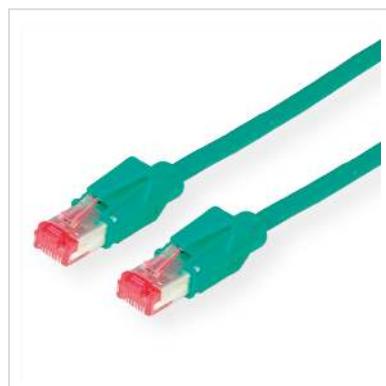

Cat.6
Class E

S/FTP

LSOH

DÄTWYLER data cable CU 7702 flex LSOH, assembled on both sides with Hirose TM21 connectors for use in Gigabit Ethernet networks, Cat.6, 1.2 GHz. Halogen-free, flame-retardant, low-smoke.

- High-quality flexible patch cable with pair and overall shielding based on DÄTWYLER CU 7702 (Cat.7)
- Assembled on both sides with Cat.6 connectors (Hirose TM21 connectors)
- Kink protection and protective tab for locking pin
- 8-wire TP copper stranded wire, pair shielding: laminated aluminium foil, overall shielding: tinned copper braid
- Cable sheath: flame-retardant, low-smoke, halogen-free polyolefin (FRNC/LSOH)
- Outer diameter 6.0 mm (approximate)
- Cat.6 / Class E according to ANSI / TIA
- Pin assignment 8 wires 1:1 according to EIA/TIA 568

Technical specifications

| | |
|---------------|-------------------------|
| Manufacturer | SECOMP |
| Product group | Twisted Pair Cable |
| Product type | S/FTP patch cord (PiMF) |

| | |
|------------------------------------|-----------------------|
| Colour | green |
| Length | 1 m |
| Shield type | S/FTP (PiMF) |
| Transfer quality | Cat6 / Class E |
| Impedance | 100 Ohm |
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 26 |
| Conductor type | Stranded |
| Crossed | no |
| Assignment | 1:1 |
| Locking lever | yes |
| Anti-kink sleeve | Put-on |
| Colour (Spout) | green |
| Cable LSOH | yes |
| Material (external cable mantle) | Halogen-free compound |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | HiRose TM21 |
| Height of packaging (single piece) | 50 mm |
| Width of packaging (single piece) | 230 mm |
| Depth of packaging (single piece) | 280 mm |
| Package weight (single piece) | 0.051 kg |