


DÄTWYLER Cat.6A (Class EA) S/FTP patch cable, CU 7702 flex LSOH, AMP v2, yellow, 5 m

Product No. 21.05.0552 **SECOMP®**
Manufacturer SECOMP
Manufacturer No. 21.05.0552

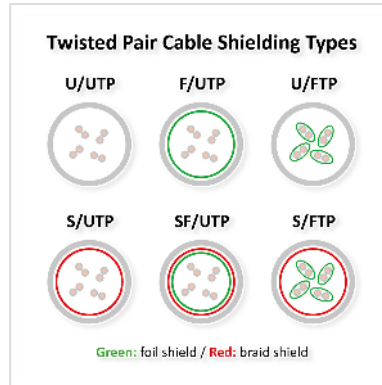

DÄTWYLER data cable CU 7702 flex LSOH, assembled on both sides with AMP v2 connectors for use in 10 Gigabit Ethernet networks, Cat.6A, 1.2 GHz. Halogen-free, flame-retardant, low-smoke.

- High-quality flexible patch cable with pair and overall shielding based on DÄTWYLER CU 7702 (Cat.7)
- Assembled on both sides with Cat.6A connectors (AMP EMT connectors)
- Kink protection and protective tab for locking pin
- 8-wire TP copper stranded wire, pair shielding: laminated aluminium foil, overall shielding: tinned copper braid
- Cable sheath: flame-retardant, low-smoke, halogen-free polyolefin (FRNC/LSOH)
- Outer diameter 6.0 mm (approximate)
- Cat.6A Class EA according to ANSI / TIA
- Pin assignment 8 wires 1:1 according to EIA/TIA 568A

Technical specifications

Manufacturer	SECOMP
Product group	Twisted Pair Cable
Product type	S/FTP patch cord (PiMF)

Colour	yellow
Length	5 m
Shield type	S/FTP (PiMF)
Transfer quality	Cat6A / Class EA
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Inner conductor material	BC (Bare Copper)
Conductor type	Stranded
Crossed	no
Assignment	EIA/TIA 568A
Locking lever	yes
Anti-kink sleeve	Put-on
Colour (Spout)	transparent
Cable LSOH	yes
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	AMP v2
Height of packaging (single piece)	30 mm
Width of packaging (single piece)	170 mm
Depth of packaging (single piece)	220 mm
Package weight (single piece)	0.189 kg