


# DÄTWYLER Cat.5e (Class D) S/UTP patch cable, CU 5502 flex PVC, Hirose TM11, green, 1 m

<b>Product No.</b>	21.05.7013
<b>Manufacturer</b>	SECOMP
<b>Manufacturer No.</b>	21.05.7013
<b>EAN (single piece)</b>	7611990752560

**SECOMP®**

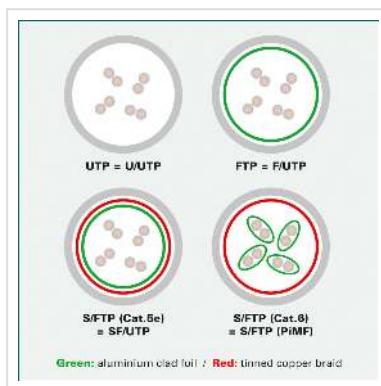

**Cat.5e**  
Class D

**S/UTP**

**DÄTWYLER data cable CU 5502 flex PVC, assembled on both sides with Hirose TM11 connectors for use in Fast Ethernet networks, Cat.5e. Flame retardant.**

- Shielded DÄTWYLER cable assembled on both sides with HiRose RJ-45 TM11 plug and anti-kink sleeve
- Pin assignment 8 wires 1 : 1
- Construction: Cable type S/UTP (no pair shielding; overall shielding: braided shield)
- Impedance: 100 ohms
- Inner conductor: 8 wires AWG 26/7 tinned copper stranded wire
- Outer diameter 5.1 mm (approximate value)

## Technical specifications

Manufacturer	SECOMP
Product group	Twisted Pair Cable
Product type	S/UTP patch cord
Colour	green
Length	1 m

Shield type	S/UTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Conductor type	Stranded
Crossed	no
Colour (Spout)	green
External cable diameter	5.1 mm
Cable LSOH	no
Material (external cable mantle)	PVC
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	HiRose TM11
Height of packaging (single piece)	30 mm
Width of packaging (single piece)	190 mm
Depth of packaging (single piece)	190 mm
Package weight (single piece)	0.048 kg