


DÄTWYLER Cat.5e (Class D) S/UTP patch cable, CU 5502 flex LSOH, AMP v2, grey, 4 m

Product No.	21.05.7804
Manufacturer	SECOMP
Manufacturer No.	21.05.7804
EAN (single piece)	7611990757978

SECOMP®

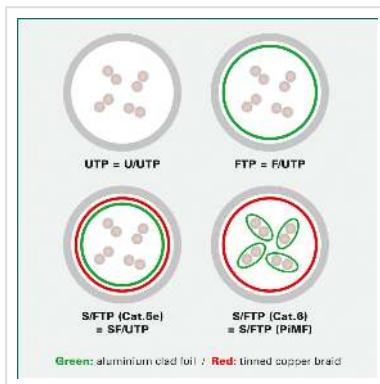

Cat.5e
Class D

S/UTP

LSOH

DÄTWYLER data cable CU 5502 flex LSOH, assembled on both sides with AMP v2 connectors for use in Fast Ethernet networks, Cat.5e. Halogen-free, flame-retardant, low-smoke.

- Shielded DÄTWYLER cable assembled on both sides with AMP RJ-45 connector, 2nd generation (v2)
- Protective tab for locking pin
- Pin assignment: 8 wires 1 : 1
- Construction: Cable type S/UTP (braided shield)
- Impedance: 100 ohms
- Inner conductor: 8 wires AWG 26 tinned copper stranded wire
- Outer diameter 5.1 mm (approximate)
- Overall shielding: braided shield
- Halogen-free, flame-retardant, low-smoke

Construction:

- Cable type: S/UTP braided shield
- Impedance: 100 ohms
- Inner conductor: 8 wires, AWG 26 copper stranded wire
- Outer diameter: 5.1 mm (approximate)
- Connector: AMP EMT

Technical specifications

Manufacturer	SECOMP
Product group	Twisted Pair Cable
Product type	S/UTP patch cord
Colour	grey
Length	4 m
Shield type	S/UTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Conductor type	Stranded
Crossed	no
Bend radius	20 mm
Assignment	EIA/TIA 568A
Locking lever	yes
Colour (Spout)	transparent
External cable diameter	5.1 mm
Cable LSOH	yes
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	AMP v2
Height of packaging (single piece)	0 mm
Width of packaging (single piece)	0 mm

Depth of packaging 0 mm
(single piece)

Package weight (single
piece) 0.15 kg