
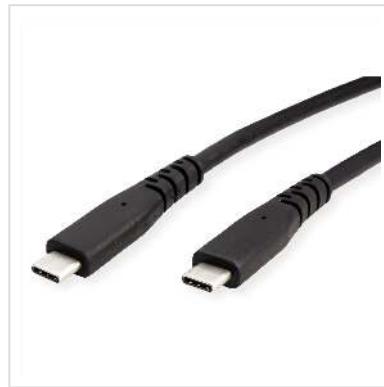


# ROLINE Cable USB4 Gen3x2, with Emark, C-C, M/M, 8K UHD-2, 80Gbit/s, 240W, black, 1 m

<b>Product No.</b>	11.02.9096
<b>Manufacturer</b>	ROLINE
<b>Manufacturer No.</b>	11.02.9096
<b>EAN (single piece)</b>	7630049636101

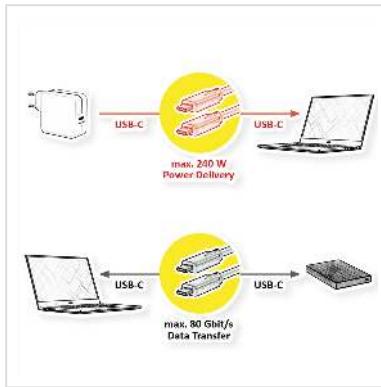

**High-quality full-featured USB4 Gen 3x2 Cable with the reversible USB Type-C connector on both ends for data transfer rates of up to 80 Gbit/s and USB Power Delivery up to 240 W (48V / 5A).**

- Full-featured USB4 Gen 3x2 Cable with improved shielding
- Very flexible thanks to the TPE cable jacket
- With the reversible Type-C connector at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Resolution up to single 8K@60Hz or dual 4K@60Hz
- Suitable for data transfer rates of up to 80 Gbit/s
- Supports USB Power Delivery up to 240 W (48V / 5A)

The major benefits of the USB4 includes faster transfer speeds (up to 40 Gbit/s), a better management of video bandwidth (using a process called "protocol tunneling" that sends DisplayPort, PCIe and USB packets at the same time while allocating bandwidth accordingly) and optional compatibility with Thunderbolt 3 products.

## Technical specifications

Manufacturer	ROLINE
Product group	Cable
Product type	USB4 Cable
Colour	black

Length	1 m
Scope of delivery	USB4 cable
Transfer quality	USB4 Gen3x2 80 Gbit/s
Connection ports	USB Type C (USB-C) Male / USB Type C (USB-C) Male
Side 1 Connector Type	USB Type C (USB-C)
Side 1 Connector	Male
Gender	
Side 2 Connector Type	USB Type C (USB-C)
Side 2 Connector	Male
Gender	
Colour (Cable)	black
Max. resolution	7680 x 4320 @60Hz (8K, UHD-2)
Maximum data transfer rate	80 Gbit/s
Area of application	External
Supported charging technology	USB-PD - USB Power Delivery Power Delivery 3.1
Power (max.)	240 W
Cable shielding	Screened
Material (external cable mantle)	TPE
Operating temperature min.	0 °C
Operating temperature max.	45 °C
Storage temperature min.	-20 °C
Storage temperature max.	70 °C
Weight	46 g
Height of packaging (single piece)	20 mm

Width of packaging  
(single piece) 70 mm

Depth of packaging  
(single piece) 70 mm

Package weight (single  
piece) 0.07 kg