


ROLINE USB Type C docking station, 4K HDMI, 2x USB 3.0 / USB 3.2 Gen 1 ports, 1x SD/MicroSD card reader, 1x USB Type C PD (Power Delivery) + Data, 1x Gigabit Ethernet

Product No.	12.02.1037
Manufacturer	ROLINE
Manufacturer No.	12.02.1037
EAN (single piece)	7611990134656

roline
Designed for Professionals

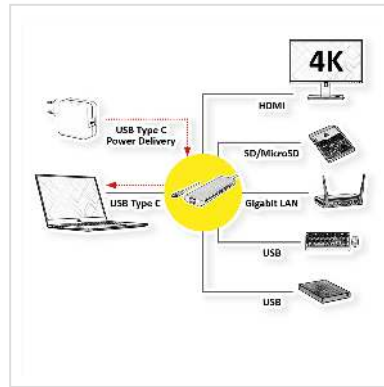

The docking station is supplied for Macbooks, Ultrabooks or Notebooks/Laptops and provides a quick and easy connection to the workplace peripherals that you use every day, including one HDMI connector, that allows you a maximum resolution of up to 3840x2160 @60Hz!

- Plug & Play
- Aluminium casing
- Small, compact design
- System requirement: Windows 7/8/10 or MacOS X10.2 and higher

Connection to device:

- 1x USB 3.1 / USB 3.2 Gen 2 Type C M

Connection for peripheral devices

- 1x HDMI Video Output: Mirror or extend your screen to a TV, monitor or projector.
- 2x USB 3.0 / USB 3.2 Gen 1 ports (data transfer rate up to 5Gbit/s), for connection of wired keyboard/mouse, USB HDD/SSD, etc.
- 1x SD/TF Card Reader
- 1x USB Type C PD (Power Delivery) + Data
- 1x RJ45 for Gigabit Ethernet

Remark: Support of "Alternate Mode (DP Alt Mode)" required

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

Technical specifications	
Manufacturer	ROLINE
Product group	Adapters, Terminators, Converters
Product type	Notebook-Docking-Station
Colour	silver
Length	0.1 m
Scope of delivery	Docking Station, manual
Side 1 connection (PC)	USB Type C
Side 2 connection (Peripherals)	1x HDMI, 2x USB 3.0 / USB 3.2 Gen 1 Type A, 1x SD/TF, 1x USB Type C PD, 1x RJ45
Side 1 Connector Type	USB Type C (USB-C)
Side 1 Connector Gender	Male
Side 2 Connector Type	HDMI Type A USB 3 Type A USB 3 Type A SD-Card-Slot TF-Card-Slot USB Type C PD (Power Delivery) RJ-45
Side 2 Connector Gender	Female
Area of application	External
Weight	83.7 g
Height of packaging (single piece)	30 mm
Width of packaging (single piece)	170 mm

Depth of packaging (single piece)	140 mm
Package weight (single piece)	0.093 kg