
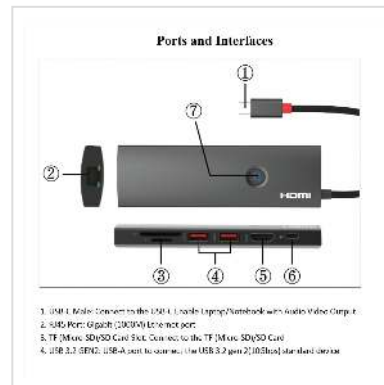


ROLINE USB 3.2 Gen 2 Type C Docking Station, 1x HDMI 4K60, 2x USB 3.2 Gen 2, 1x USB Type C PD (Power Delivery), 1x Gigabit Ethernet, 1x SD/microSD Card Reader

Product No.	12.02.1126
Manufacturer	ROLINE
Manufacturer No.	12.02.1126
EAN (single piece)	7630049635609

roline
Designed for Professionals

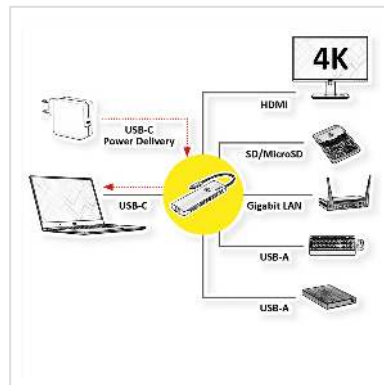

This ROLINE USB 3.2 Gen 2 Type C Docking Station provides your Notebook, Laptop, Macbook, or Ultrabook with 1x HDMI 4K@60Hz, 2x USB 3.1 / USB 3.2 Gen 2 Type A, 1x USB Type C PD (Power Delivery), 1x Gigabit Ethernet and 1x SD/Micro SD Card Reader!

- With blue illuminated On/Off switch for the HDMI port
- Plug & Play
- Aluminium housing in dark grey
- Fixed fabric-covered Type C connection cable (length about 21 cm)
- Cable can be plugged into the docking itself to form a loop (for convenient transport)
- Max. HDMI resolution: 3840 x 2160 @60Hz
- Max. USB data transfer: 10 Gbit/s

This ROLINE USB 3.2 Gen 2 Type C Docking Station provides your Notebook, Laptop, Macbook, or Ultrabook with 1x HDMI 4K@60Hz, 2x USB 3.1 / USB 3.2 Gen 2 Type A, 1x USB Type C PD (Power Delivery), 1x Gigabit Ethernet and 1x SD/Micro SD Card Reader!

Connection to the mobile device:

- 1x USB Type C connector

Connections for peripheral devices:

- 1x HDMI 4K@60Hz video output: mirror or expand your screen to a TV, monitor, projector, etc.
- 2x USB 3.1 / USB 3.2 Gen 2 Type A ports (data transfer rate up to 10Gbit/s), for connecting e.g. keyboard, mouse, USB HDD/SSD, etc.
- 1x USB Type C PD (Power Delivery, max. 100W)
- 1x RJ45 for Gigabit Ethernet
- 1x SD/microSD

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

Technical specifications	
Manufacturer	ROLINE
Product group	Adapters, Terminators, Converters
Product type	Docking Station
Colour	grey
Scope of delivery	Docking Station, User Manual
Transfer quality	HDMI Ultra High Speed (HDMI 2.0)
Max. resolution	3840 x 2160 @60Hz (4K, UHD-1)
Side 1 connection (PC)	USB Type C
Side 2 connection (Peripherals)	1x HDMI 4K60, 2x USB 3.2 Gen 2 Type A, 1x USB Type C PD (Power Delivery), 1x Gigabit Ethernet, 1x SD/microSD Card Reader
Side 1 Connector Type	USB Type C (USB-C)
Side 1 Connector Gender	Male
Side 2 Connector Type	HDMI Type A USB 3 Type A USB 3 Type A USB Type C PD (Power Delivery) RJ-45 SD-Card-Slot MicroSD-Card-Slot
Side 2 Connector Gender	Female

Colour (Cable)	black
Area of application	External
Dimensions (HxWxD)	15 x 39 x 135 mm
Material	Aluminium Alloy + ABS
Technical particularity	With blue illuminated On/Off switch for the HDMI port
Operating temperature min.	0 °C
Operating temperature max.	60 °C
Height	15 mm
Width	39 mm
Depth	135 mm
Weight	78 g
Height of packaging (single piece)	10 mm
Width of packaging (single piece)	170 mm
Depth of packaging (single piece)	200 mm
Package weight (single piece)	1.1 kg