


# ROLINE FTP Patch Cord Cat.5e (Class D), blue, 0.5 m

|                    |               |
|--------------------|---------------|
| Product No.        | 21.15.0184    |
| Manufacturer       | ROLINE        |
| Manufacturer No.   | 21.15.0184    |
| EAN (single piece) | 7611990134403 |

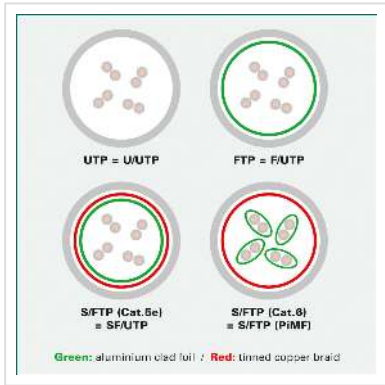

Patch cable for networking connections between devices. Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. High quality plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded copper wire. Complete shielding with aluminium clad polyester foil.

For a structured cabling system we recommend to use the following components: ROLINE Cat.5e FTP Cable, Solid Wire, AWG24: 21.15.0009 (100 m), 21.15.0010 (300 m); ROLINE Cat.5e Flush/Surface Mount Wall Jack, shielded: 25.16.8487 (white), 25.16.8486 (ivory)/25.16.8387 (white), 25.16.8386 (ivory), ROLINE Cat.5e 19" Patch Panel, 24 Ports, shielded: 26.11.0329 (light grey), 26.11.0328 (black); ROLINE Cat.5e FTP Patch Cord, grey, 5 m: 21.15.0105. Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class D specifications.

| Technical specifications |                    |
|--------------------------|--------------------|
| Manufacturer             | ROLINE             |
| Product group            | Twisted Pair Cable |
| Product type             | FTP Patch Cord     |
| Colour                   | blue               |

|                                    |                 |
|------------------------------------|-----------------|
| Length                             | 0.5 m           |
| Shield type                        | FTP             |
| Transfer quality                   | Cat5e / Class D |
| Impedance                          | 100 Ohm         |
| Quantity of wires                  | 8               |
| Conductor cross section (AWG)      | AWG 26          |
| Conductor type                     | Stranded        |
| Crossed                            | no              |
| Locking lever                      | no              |
| Anti-kink sleeve                   | Moulded-on      |
| Colour (Spout)                     | blue            |
| Cable LSOH                         | no              |
| Side 1 Connector Type              | RJ-45           |
| Side 1 Connector Gender            | Male            |
| Side 2 Connector Type              | RJ-45           |
| Side 2 Connector Gender            | Male            |
| Connector Type RJ45                | Standard        |
| Weight                             | 23.2 g          |
| Height of packaging (single piece) | 20 mm           |
| Width of packaging (single piece)  | 80 mm           |
| Depth of packaging (single piece)  | 120 mm          |
| Package weight (single piece)      | 0.05 kg         |