
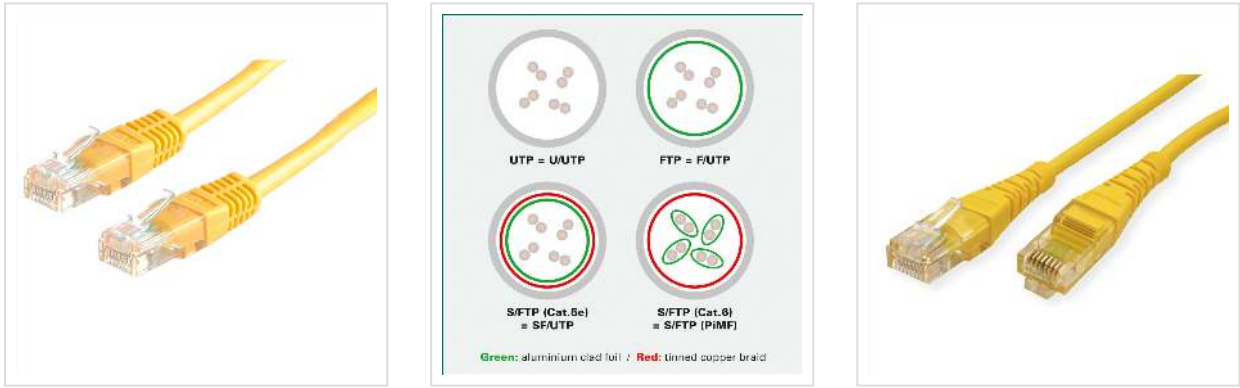


ROLINE UTP Patch Cord Cat.5e (Class D), yellow, 3 m

| | | |
|--------------------|---------------|--|
| Product No. | 21.15.0552 |  |
| Manufacturer | ROLINE | |
| Manufacturer No. | 21.15.0552 | |
| EAN (single piece) | 7611990134830 | |



Patch cable for networking connections between devices. Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. High quality plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded copper wire.

For a structured cabling system we recommend to use the following components: ROLINE Cat.5e UTP Cable, Solid Wire, AWG24: 21.15.0512 (100 m), 21.15.0511 (300 m); ROLINE Cat.5e Flush/Surface Mount Wall Jack, unshielded: 25.16.8506 (white), 25.16.8501 (ivory)/25.16.8406 (white), 25.16.8401 (ivory); ROLINE Cat.5e 19" Patch Panel, 24 Ports, unshielded: 26.11.0349 (black), 26.11.0347 (light grey); ROLINE Cat.5e UTP Patch Cord, grey, 5 m: 21.15.0505. Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class D specifications.

| Technical specifications | |
|--------------------------|--------------------|
| Manufacturer | ROLINE |
| Product group | Twisted Pair Cable |
| Product type | UTP Patch Cables |
| Colour | yellow |

| | |
|------------------------------------|-----------------|
| Length | 3 m |
| Shield type | UTP |
| Transfer quality | Cat5e / Class D |
| Impedance | 100 Ohm |
| Quantity of wires | 8 |
| Conductor type | Wire |
| Crossed | no |
| Locking lever | no |
| Anti-kink sleeve | Moulded-on |
| Colour (Spout) | yellow |
| Cable LSOH | no |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Weight | 85.6 g |
| Height of packaging (single piece) | 20 mm |
| Width of packaging (single piece) | 150 mm |
| Depth of packaging (single piece) | 210 mm |
| Package weight (single piece) | 0.05 kg |