
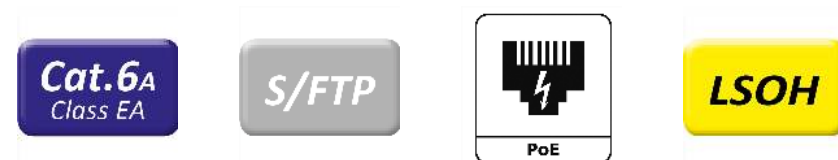


# ROLINE Outdoor S/FTP Patch Cord Cat.6A / Class EA, Stranded, TPE, LSOH, black, 3 m

<b>Product No.</b>	21.15.0753
<b>Manufacturer</b>	ROLINE
<b>Manufacturer No.</b>	21.15.0753
<b>EAN (single piece)</b>	7630049627482

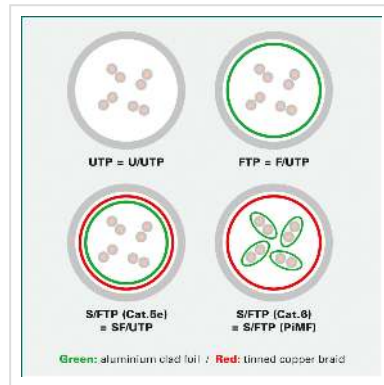

**Assembled double shielded (PiMF) twisted pair cable category 6A with shielded RJ-45 connectors on both sides. For outdoor use (cable routing), e.g. for connecting an IP camera.**

Patch cord for networking connections between devices in combination with outdoor application (e.g. connection to outdoor surveillance cameras)

- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends
- Durable due to moulded kink protection
- Suitable for PoE applications and multimedia applications where the extension is working over TP
- High quality plugs with gold plated contacts
- UV - resistant (Ultraviolet resistance - ability of the material to withstand the degradation that can be caused by exposure to ultraviolet light)
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium foil

REMARK: NOT suitable for underground installation / application

Technical specifications	
Manufacturer	ROLINE
Product group	Twisted Pair Cable
Product type	S/FTP patch cord (PiMF)
Colour	black
Length	3 m
Shield type	S/FTP (PiMF)
Transfer quality	Cat6A / Class EA
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Power over Ethernet (PoE)	yes
Conductor type	Stranded
Crossed	no
Bend radius	Min. 25mm
Locking lever	yes
Anti-kink sleeve	Moulded-on
External cable diameter	6.0 +/-0.2mm
Cable LSOH	yes
Material (external cable mantle)	TPE
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Operating temperature min.	-40 °C

Operating temperature max.	60 °C
Storage temperature min.	-40 °C
Storage temperature max.	75 °C
Weight	91 g
Height of packaging (single piece)	10 mm
Width of packaging (single piece)	120 mm
Depth of packaging (single piece)	160 mm
Package weight (single piece)	0.11 kg