


ROLINE Cat.6 (Class E) S/FTP (PiMF) Cable, Stranded, 300 m

Product No.	21.15.0892
Manufacturer	ROLINE
Manufacturer No.	21.15.0892
EAN (single piece)	7611990110353

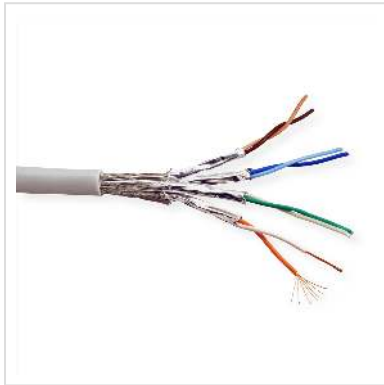

Twisted pair network cable for assembly with RJ45 plugs

- Structured building wiring
- Impedance: 100 Ohm
- Colour: Grey
- Construction:
 - 8 lines, stranded copper wire, AWG26
 - pairs shielded with aluminium foil
 - complete shielding in tinned copper braid

For a structured cabling system we recommend to use the following components:

ROLINE Cat.6 S/FTP Cable, Solid Wire, AWG23: 21.15.0890 (100 m), 21.15.0891 (300 m)

ROLINE Cat.6 Flush Mount Wall Jack, shielded: 25.16.8492 (white), 25.16.8493 (ivory)

ROLINE Cat.6 Surface Mount Wall Jack, shielded: 25.16.8392 (white), 25.16.8393 (ivory)

ROLINE Cat.6 19" Patch Panel, 24 Ports, shielded: 26.11.0351 (light grey), 26.11.0361 (black)

ROLINE Cat.6 S/FTP Patch Cord, grey, 5 m: 21.15.0835

The accredited German laboratory GHMT has tested and certified this product combination, in a Channel of 100 meters, as being compliant to Class E specifications; certificate no.

z2365b-10-E (with flush mount)/z2364b-10-E (with surface mount).

Technical specifications	
Manufacturer	ROLINE
Product group	Twisted Pair Cable
Product type	Raw cable Cat.6
Colour	grey
Length	300 m
Contents	300 m
Shield type	SFTP
Transfer quality	Cat6 / Class E
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Conductor type	Wire
Cable LSOH	no
Material (external cable mantle)	PVC
Weight	10.99 kg
Height of packaging (single piece)	360 mm
Width of packaging (single piece)	360 mm
Depth of packaging (single piece)	360 mm
Package weight (single piece)	13.3 kg