

## ROLINE S/FTP (PiMF) Patch Cord, Cat.6 (Class E), red, 0.3 m

Product No. Manufacturer Manufacturer No. EAN (single piece)





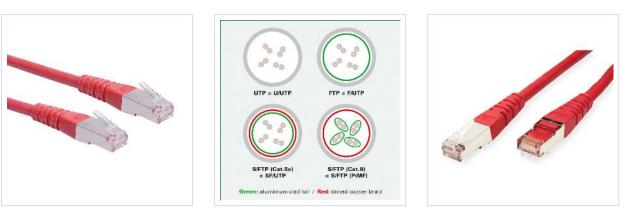

Patch cable for networking connections between devices. Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. High quality plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4pair stranded copper wire. Complete braid shielding. Pairs shielded with aluminium clad polyester foil.

For a structured cabling system we recommend to use the following components: ROLINE Cat.6 S/FTP Cable, Solid Wire, AWG23: 21.15.0890 (100 m), 21.15.0891 (300 m); ROLINE Cat.6 Flush Mount Wall Jack, shielded: 25.16.8492 (white), 25.16.8493 (ivory); ROLINE Cat.6 Surface Mount Wall Jack, shielded: 25.16.8392 (white), 25.16.8393 (ivory); ROLINE Cat.6 19" Patch Panel, 24 Ports, shielded: 26.11.0351 (light grey), 26.11.0361 (black); ROLINE Cat.6 S/FTP Patch Cord, grey, 5 m: 21.15.0835. The accredited German laboratory GHMT has tested and certified this product combination, in a Channel of 100 meters, as being compliant to Class E specifications; certificate no. z2365b-10-E (with flush mount)/z2364b-10-E (with surface mount).

| Technical specifications |        |  |
|--------------------------|--------|--|
| Manufacturer             | ROLINE |  |

| Product group                         | Twisted Pair Cable |
|---------------------------------------|--------------------|
| Product type                          | S/FTP Patchcord    |
| Colour                                | red                |
| Length                                | 0.3 m              |
| Shield type                           | SFTP               |
| Transfer quality                      | Cat6 / Class E     |
| Impedance                             | 100 Ohm            |
| Quantity of wires                     | 8                  |
| Conductor type                        | Wire               |
| Crossed                               | no                 |
| Locking lever                         | no                 |
| Anti-kink sleeve                      | Moulded-on         |
| Colour (Spout)                        | red                |
| Cable LSOH                            | no                 |
| Side 1 Connector Type                 | RJ-45              |
| Side 1 Connector<br>Gender            | Male               |
| Side 2 Connector Type                 | RJ-45              |
| Side 2 Connector<br>Gender            | Male               |
| Connector Type RJ45                   | Standard           |
| Weight                                | 21.9 g             |
| Height of packaging<br>(single piece) | 10 mm              |
| Width of packaging<br>(single piece)  | 130 mm             |
| Depth of packaging<br>(single piece)  | 170 mm             |
| Package weight (single<br>piece)      | 0.025 kg           |