
ROLINE UTP Patch Cord Cat.6A, Component Level, LSOH, red, 2 m

| Product No. Manufacturer | 21.15.2712 ROLINE | roline Designed for Professionals |
|--|-----------------------------|---|
| Manufacturer No. EAN (single piece) | 21.15.2712 7611990137442 | |
| | | |

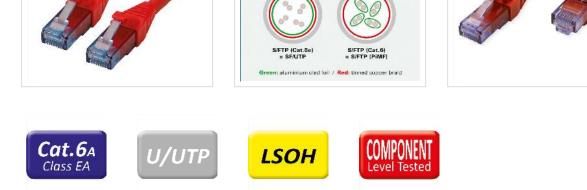

Patch cable for networking connections between devices. Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. High quality plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded copper wire.

100% Component Level testing

| Technical specifications | | |
|--------------------------|--------------------|--|
| Manufacturer | ROLINE | |
| Product group | Twisted Pair Cable | |
| Product type | UTP Patch Cables | |
| Colour | red | |
| Length | 2 m | |
| Shield type | UTP | |
| Transfer quality | Cat6A / Class EA | |

| Component-Level certified | yes |
|---------------------------------------|------------|
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 26 |
| Conductor type | Stranded |
| Crossed | no |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Colour (Spout) | red |
| Cable LSOH | yes |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Weight | 77 g |
| Height of packaging (single piece) | 20 mm |
| Width of packaging (single piece) | 180 mm |
| Depth of packaging (single piece) | 190 mm |
| Package weight (single piece) | 0.103 kg |
| | |