


# ROLINE 19-inch network cabinet Basic 42 U, 600x600 WxD glass door grey

<b>Product No.</b>	26.21.0042
<b>Manufacturer</b>	ROLINE
<b>Manufacturer No.</b>	26.21.0042
<b>EAN (single piece)</b>	7630049600430

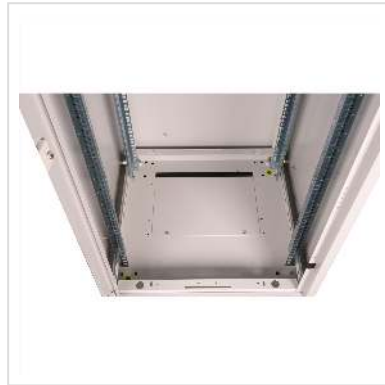

## ROLINE 19 inch network cabinet Basic 42 U 600x600 WxD glass door grey

The network cabinets in the ROLINE Basic series were developed to enable simple and particularly cost-efficient network expansion. Strategically placed cable inlets ensure effortless installation depending on the application. The cable inlet is located in the base chassis, protected by a screwed cover plate and positioned in the rear centre area. For enclosures from 800 mm width, additional cable inlets with plastic covers are added on the left and right. These are also integrated in the roof (once for 600 mm enclosure width, three times for 800 mm enclosure width). The roof chassis also has a punched-out area for the installation of a fan module. Two pairs of galvanised 19" profile rails are installed inside, which can be read in both directions and can be adjusted in depth. They are also connected to additional depth struts in the enclosure. Each cabinet consists of a robust steel construction with a material thickness of up to 1.5 mm sheet steel.

The colouring is done using electrostatic powder coating in the standard colours grey (RAL 7035) and black (RAL 9005). Removable side and rear panels as well as a lockable and removable front door improve accessibility. It is possible to change the door hinge. Thanks to their demountable design, the cabinets can also be completely dismantled if required.

### Technical specifications

Manufacturer	ROLINE
Product group	19"/-10"-Cabinet
Product type	19"-Floor cabinet

Colour	grey
Scope of delivery	19-inch network enclosure Basic 42 U, earthing cable set, installation set (screws, cage nuts, washers), 2x spanners, instructions
Type of profile rail	L-shaped
Modular spacing	482.6 mm (19 inch)
Model	With permanent frame
Height units	42 U
Minimum rack depth supported	290 mm
Maximum rack depth supported	550 mm
delivery condition	fully assembled
Material group	Steel
Material front door	Glass
Wall mountable	no
Demountable	yes
Adjustable feet	yes
Maximum weight capacity	600 kg
Protection class (IP Code)	IP20
Soundproof	no
Number of doors	1
With front door	yes
With backside door	no
With glazed door	yes
Front	Glass door
Rack rails	yes
Roof	Roof not removable (fixed)
Side panels included	yes

Removeable side panels	yes
Removable front door	yes
Removable back door	no
Floor	Base plate punched out
Ventilation	Passive
RAL colour	RAL 7035 Light grey
Height	2010 mm
Width	600 mm
Depth	600 mm
Weight	72.6 kg
Height of packaging (single piece)	2150 mm
Width of packaging (single piece)	680 mm
Depth of packaging (single piece)	680 mm
Package weight (single piece)	76.6 kg