


VALUE Dockingstation Type C, 1x HDMI 4K60, 1x HDMI 4K30, 1x DP 4K60, 1x VGA 1080P, 1x Gigabit Ethernet, 2x USB 3.2 Gen1 (C), 1x USB 3.2 Gen1 (A), 1x USB 2.0 (A), 1x Type C PD (Power Delivery)

Product No.	12.99.1147
Manufacturer	VALUE
Manufacturer No.	12.99.1147
EAN (single piece)	7630049640818

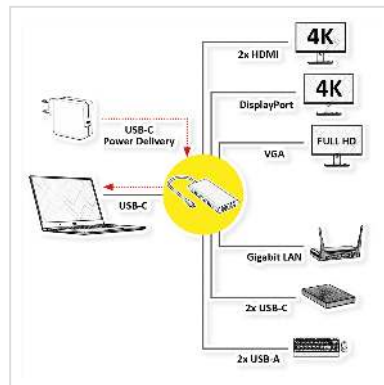

Connect your MacBook, Ultrabook, Notebook/Laptop, or PC with an USB Type-C port to an HDMI, DisplayPort, or VGA screen, monitor, or projector (with a maximum resolution of up to 3840x2160 @30/60Hz or 1920x1080 @60Hz). Also, you can connect additional USB devices via the USB Type-C or USB Type-A ports, while simultaneously charging your device via the Type-C PD (Power Delivery) port and connecting it to the network via the RJ-45 Gigabit Ethernet port.

- Connect your device with Type C port to any HDMI, DP or VGA display or projector
- Maximum resolution: 3840x2160@ 60Hz (DP port), 3840x2160 @30/60Hz (HDMI port), 1920x1080 @60Hz (VGA port)
- 1x Gigabit Ethernet port (GbE - 1000 Mbps)
- 3x USB 3.2 Gen 1 (5 Gbps) + 1x USB 2.0 (480 Mbps)
- USB Type C PD: Power Delivery Function for charging of devices via the additional Type C connection (100W)
- Portable design
- No power adapter required
- Cable length: ca. 13 cm

Remark: Support of "Alternate Mode (DP Alt Mode)" required

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has

been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

Technical specifications

Manufacturer	VALUE
Product group	Adapters, Terminators, Converters
Product type	Notebook-Docking-Station
Colour	grey
Length	0.13 m
Scope of delivery	Docking Station
Max. resolution	3840 x 2160 @60Hz (4K, UHD-1)
Side 1 connection (PC)	Type C
Side 2 connection (Peripherals)	1x HDMI 4K60, 1x HDMI 4K30, 1x DP 4K60, 1x VGA 1080P, 1x Gigabit Ethernet, 2x USB 3.2 Gen1 (C), 1x USB 3.2 Gen1 (A), 1x USB 2.0 (A), 1x Type C PD (Power Delivery)
Side 1 Connector Type	USB Type C (USB-C)
Side 1 Connector Gender	Male
Side 2 Connector Type	HDMI Type A DisplayPort HD D-Sub 15-pin (HD-15), VGA RJ-45 USB Type C (USB-C) USB 3 Type A USB 2.0 Type A USB Type C PD (Power Delivery)
Side 2 Connector Gender	Female
Area of application	External
Dimensions (HxWxD)	17 x 62 x 125 mm
Technical particularity	Power Delivery Function (100W)
Height	17 mm
Width	62 mm
Depth	125 mm

Weight	96 g
Height of packaging (single piece)	40 mm
Width of packaging (single piece)	80 mm
Depth of packaging (single piece)	160 mm
Package weight (single piece)	0.17 kg