


VALUE HDMI Extender over Twisted Pair, 60m

| | |
|---------------------------|---------------|
| Product No. | 14.99.3569 |
| Manufacturer | VALUE |
| Manufacturer No. | 14.99.3569 |
| EAN (single piece) | 7630049633407 |

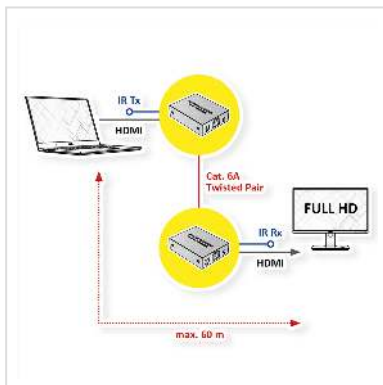

With this VALUE HDMI Extender Kit, you can extend HDMI Audio/Video signals up to 60 meters over a single CAT6 cable with a Full HD 1920 x 1080 @60Hz resolution. The Extender Kit includes both the local transmitter and the remote receiver and is perfect for point-to-point digital signage applications that require high HDMI video quality. The extender can also transmit signals from remote controls - ideal for controlling your video source from your video destination.

- Transmission distance up to 60 meters by using a Cat 6 cable or higher
- Max. resolution Full HD 1920 x 1080 @60Hz
- Supports transmitting lossless uncompressed A/V signal
- IR signal transmission for convenient remote control of the source device
- Supports 3D video format
- Stable metal casing
- Power supply included in delivery
- Receiver is powered via the transmitter
- Weight: Transmitter / Receiver (each) 117 g
- Contents: 1x Transmitter, 1x Receiver, 1x Power Supply DC 5V 1A, 1x IR TX Cable, 1x IR RX Cable, 4x Mounting Ears, 1x User Manual

Technical specifications

| | |
|----------------------------|---|
| Manufacturer | VALUE |
| Product group | Video Extender |
| Product type | HDMI Extender |
| Colour | black |
| Scope of delivery | 1x Transmitter, 1x Receiver, 1x Power Supply DC 5V 1A, 1x IR TX Cable, 1x IR RX Cable, 4x Mounting Ears, 1x User Manual |
| Interface | HDMI |
| Inputs | 1 |
| Outputs | 1 |
| Max. distance | 60 m |
| Video input | HDMI |
| Video output | HDMI |
| Max. resolution (nom.) | Supports 1920 x 1080 / 1920 x 1200 @60Hz (2K, Full HD) |
| Max. resolution | 1920 x 1080 @60Hz (2K, Full HD) |
| Dimensions (HxWxD) | 26 x 48 x 84 mm |
| Power supply unit | 1x |
| Power supply output | DC 5V 1A |
| Technical particularity | Extends the signal up to 60m |
| Operating temperature min. | 0 °C |
| Operating temperature max. | 70 °C |
| Storage temperature min. | -10 °C |
| Storage temperature max. | 80 °C |
| Height | 26 mm |
| Width | 48 mm |
| Depth | 84 mm |
| Weight | 234 g |

| | |
|---------------------------------------|---------|
| Height of packaging (single piece) | 60 mm |
| Width of packaging (single piece) | 190 mm |
| Depth of packaging (single piece) | 210 mm |
| Package weight (single piece) | 0.65 kg |