
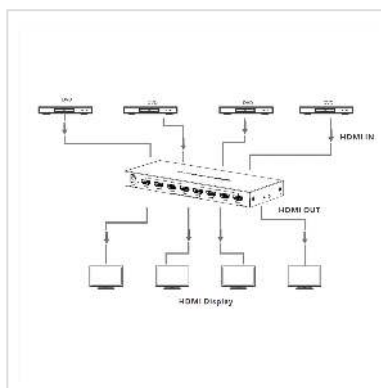


VALUE HDMI Matrix Switch, 4x4, 4K60Hz, with remote control

| | |
|---------------------------|---------------|
| Product No. | 14.99.3593 |
| Manufacturer | VALUE |
| Manufacturer No. | 14.99.3593 |
| EAN (single piece) | 7630049633360 |

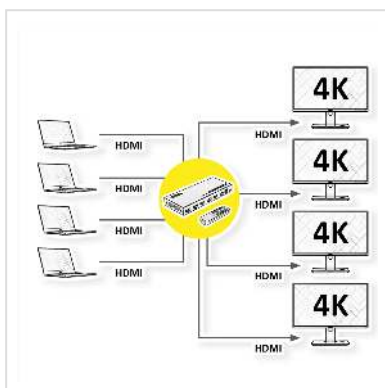

2160p
UHD-1

4K

3D
capable

This 4 in 4 out HDMI Matrix can switch 4 HDMI input signals (PC, notebook, etc.) to 4 HDMI displays (monitor, projector, etc.) with resolutions up to 4096x2160@60Hz. It supports multiple switching methods (buttons on the matrix, IR remote control and RS232). Any two of the four HDMI outputs support automatic down-scaling. This matrix can be used in security surveillance, education, training, exhibitions, trade shows, broadcasting, command centers and many other applications.

- Four HDMI input signals can be switched to four HDMI output devices
- Up to 4K (4096 x 2160 @60Hz) resolution and backwards compatible
- Compatible with HDCP 2.2 and HDCP 1.4
- Any two of the four HDMI outputs support auto down-scaling.
- Supported digital audio formats: DTS-HD/Dolby-TrueHD/LPCM7.1/DTS/Dolby-Atmos
- Input devices can be switched by push buttons on the switch, IR remote control or by RS-232
- 16 different EDID states / resolutions can be set with the DIP switch
- Contents: HDMI Matrix Switch, Power Supply, Remote Control, Mounting Ears (2x), Terminal Block, User Manual

| Technical specifications | |
|----------------------------|---|
| Manufacturer | VALUE |
| Product group | Splitters and selectors |
| Product type | HDMI-Matrix-Switch 4K |
| Colour | black |
| Scope of delivery | HDMI Matrix Switch, Power Supply, Remote Control, Mounting Ears (2x), Terminal Block, User Manual |
| Interface | HDMI |
| Inputs | 4 |
| Outputs | 4 |
| Video input | 4x HDMI Female |
| Video output | 4x HDMI Female |
| Video band width | 18 Gbps |
| Max. resolution (nom.) | 4096 x 2160 @60Hz (4K) |
| Max. resolution | 4096 x 2160 @60Hz (4K) |
| Dimensions (HxWxD) | 21 x 210 x 80 mm |
| Power supply output | 5V DC, 1A |
| Technical particularity | Switching via push buttons, via IR remote control or via RS-232 |
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C |
| Storage temperature min. | -30 °C |
| Storage temperature max. | 70 °C |
| Height | 21 mm |
| Width | 210 mm |
| Depth | 80 mm |
| Weight | 375 g |

| | |
|---------------------------------------|--------|
| Height of packaging (single piece) | 90 mm |
| Width of packaging (single piece) | 180 mm |
| Depth of packaging (single piece) | 250 mm |
| Package weight (single piece) | 0.7 kg |