


VALUE UTP Cable Cat.5e (Class D), Solid Wire, AWG24, grey, 300 m

Product No.	21.99.0596
Manufacturer	VALUE
Manufacturer No.	21.99.0596
EAN (single piece)	7611990148417

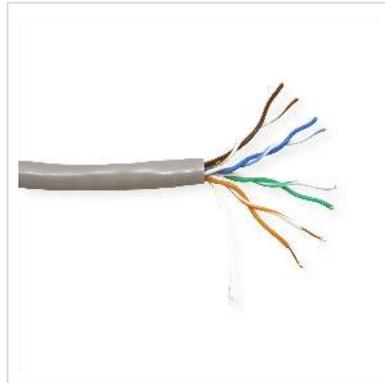

- Structured building wiring
- Impedance: 100 Ohm
- Length: 300 m
- Colour: Grey
- Construction: 8 lines, copper, solid wire AWG24

For a structured cabling system we recommend to use the following components:

VALUE Cat.5e UTP Cable, Solid Wire, AWG24, 300 m: 21.99.0596

ROLINE Cat.5e Flush/Surface Mount Wall Jack, unshielded: 25.16.8506 (white), 25.16.8501 (ivory)/25.16.8406 (white), 25.16.8401 (ivory)

VALUE Cat.5e 19" Patch Panel, 24 Ports, unshielded: 26.99.0349 (black), 26.99.0347 (light grey)

VALUE Cat.5e UTP Patch Cord, grey, 5 m: 21.99.0505

Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class D specifications.

Technical specifications

Manufacturer	VALUE
Product group	Twisted Pair Cable
Product type	Installation cable
Colour	grey
Length	300 m
Contents	300 m
Shield type	UTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 24
Conductor type	Solid wire
Cable LSOH	no
Material (external cable mantle)	PVC
Fire protection class	Eca
Weight	7445.3 g
Height of packaging (single piece)	220 mm
Width of packaging (single piece)	360 mm
Depth of packaging (single piece)	360 mm
Package weight (single piece)	9.35 kg