



VALUE Outdoor S/FTP Patch Cord Cat.6A/Class EA, Solid, TPE, LSOH, black, 20 m

| | |
|---------------------------|---------------|
| Product No. | 21.99.0720 |
| Manufacturer | VALUE |
| Manufacturer No. | 21.99.0720 |
| EAN (single piece) | 7630049627420 |

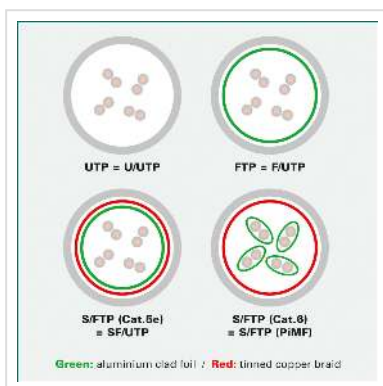

Patch cord for outdoor use, e.g. for connecting an IP camera

Patch cords for networking connections between devices in combination with outdoor application (e.g. connection to outdoor surveillance cameras)

- Assembled double shielded (PIMF) twisted pair cable made of solid wire in category 6A with shielded RJ-45 connectors on both sides.
- Suitable for connecting external components (e.g. IP cameras), but also for PoE applications or as TP extension cable in multimedia applications
- UV - resistant
- Durable thanks to molded bend protection
- Contact assignment: 1:1 according to EIA/TIA568, 8 cores
- Construction: 8 cores solid wire. Pair shielding: aluminum-clad polyester foil. Overall shielding: copper braiding
- High quality gold plated contacts

REMARK: NOT suitable for underground installation / application

Important: Not suitable for underground installation. RJ-45 connectors must be protected from the influence of the weather.

| Technical specifications | |
|----------------------------------|-------------------------|
| Manufacturer | VALUE |
| Product group | Twisted Pair Cable |
| Product type | S/FTP patch cord (PiMF) |
| Colour | black |
| Length | 20 m |
| Shield type | S/FTP (PiMF) |
| Transfer quality | Cat6A / Class EA |
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 26 |
| Power over Ethernet (PoE) | yes |
| Conductor type | Solid wire |
| Crossed | no |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Cable LSOH | yes |
| Material (external cable mantle) | TPE |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Operating temperature min. | -40 °C |
| Operating temperature max. | 60 °C |
| Weight | 704 g |

| | |
|---------------------------------------|--------|
| Height of packaging (single piece) | 50 mm |
| Width of packaging (single piece) | 180 mm |
| Depth of packaging (single piece) | 190 mm |
| Package weight (single piece) | 0.6 kg |