


VALUE PoE+ Switch, Gigabit Ethernet, 8+2 Uplink Ports (1x GbE, 1x SFP)

Product No.	21.99.1193
Manufacturer	VALUE
Manufacturer No.	21.99.1193
EAN (single piece)	7630049613041

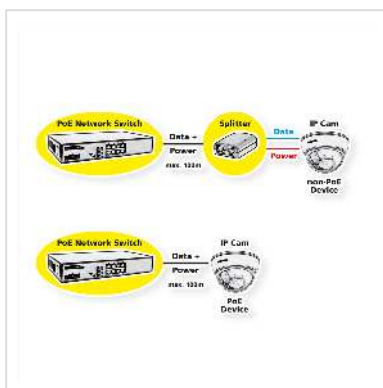

Gigabit Ethernet PoE switch with 8+2 ports for small or medium-sized network environments.

This Gigabit Ethernet PoE switch is designed for small or medium network environments to strengthen its network connection. It converts standard 100~240V/AC power into low-voltage DC that runs over an existing LAN cable to power up Power over Ethernet (PoE) compliant network accessories like e.g. workgroup switches, network cameras, access points, IP-phones.

- 8x 10/100/1000 Mbit/s Auto-Negotiation PoE ports with 1 Gigabit Uplink or 1x SFP Port
- Compliant with IEEE802.3af/at standard (IEEE802.3, 802.3u, 802.3af, 802.3x)
- IEEE802.3x flow control for Full-Duplex Mode and back-pressure for Half-Duplex Mode
- Bandwidth 18Gbit/s
- Detects your PoE devices according to PoE standard
- Supports automatic detect functionality to protect the system when the system power is overloaded or there is non-POE device
- LED indicators for monitoring power, link, activity and speed
- Switching method: Store-and-forward
- Metal casing
- Contents: Switch, power cord, manual

PoE/PoE+ resource management: the switch supports PoE/PoE+ connections with up to 30W per port. Total switch consumption is limited to 150 watts to prevent excessive heat dissipation. With Power over Ethernet, the ports are prioritized numerically (1-2-3-...) and

switched off from back to front at full load.

Technical specifications	
Manufacturer	VALUE
Product group	Network Switches
Product type	PoE Gigabit Switch
Colour	black
Network standard	Gigabit Ethernet
LAN (Mbps)	10/100/1000
Quantity of ports	10
Gigabit Ethernet Ports RJ-45	9
Gigabit Ethernet Ports Fibre	1
Power over Ethernet (PoE)	PoE
Quantity of PoE ports	8
Max. PoE output power per port	30 W
Max. PoE output power (total)	150 W
Dimensions (HxWxD)	45 x 210 x 140 mm
Power supply unit (internal/external)	External
Mains connection	Cold appliance connection
Height	45 mm
Width	210 mm
Depth	140 mm
Weight	1115.5 g
Height of packaging (single piece)	70 mm
Width of packaging (single piece)	220 mm

Depth of packaging (single piece)	260 mm
Package weight (single piece)	1.2 kg