


# ROLINE RM U/FTP DataCenter Patch Cord Cat.6A (Class EA), slim, black, 0.15 m

<b>Product No.</b>	21.45.3350
<b>Manufacturer</b>	ROLINE RECYCLED MATERIAL
<b>Manufacturer No.</b>	21.45.3350
<b>EAN (single piece)</b>	7630049630239

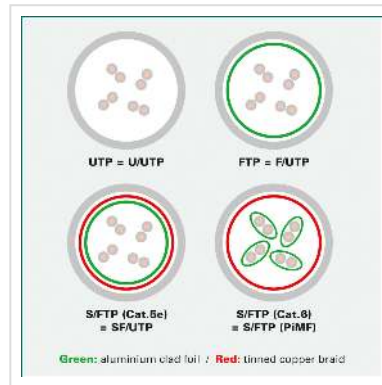

**Category 6a twisted-pair patch cable with shielded RJ-45 connectors on both sides. Particularly thin and flexible cable from our ROLINE Recycled Material product line with individual pairs of wires in aluminium-laminated foil for use in confined spaces, such as in data centres.**

- Durable thanks to moulded-on kink protection
- Suitable as patch cable in patch panels or as device connection cable and intended for use in the LAN
- Contact assignment: 1:1 according to EIA/TIA568, 8 cores
- Structure: 8 cores stranded wire, pairs shielded with alu-laminated foil

**ROLINE RECYCLED MATERIAL products consist of more than 50% recycled materials. The packaging is even made from 100% recycled material.**

## Technical specifications

Manufacturer	ROLINE RECYCLED MATERIAL
Product group	Twisted Pair Cable
Product type	FTP Patch Cord

Colour	black
Length	0.15 m
Shield type	FTP
Transfer quality	Cat6A / Class EA
Quantity of wires	8
Conductor cross section (AWG)	AWG 32
Conductor type	Stranded
Crossed	no
Slim cable	yes
Locking lever	yes
Anti-kink sleeve	Moulded-on
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Operating temperature min.	-20 °C
Operating temperature max.	75 °C
Storage temperature min.	-20 °C
Storage temperature max.	80 °C
Weight	8.2 g
Height of packaging (single piece)	10 mm
Width of packaging (single piece)	10 mm

---

Depth of packaging (single piece)	10 mm
--------------------------------------	-------

Package weight (single piece)	0.005 kg
----------------------------------	----------