



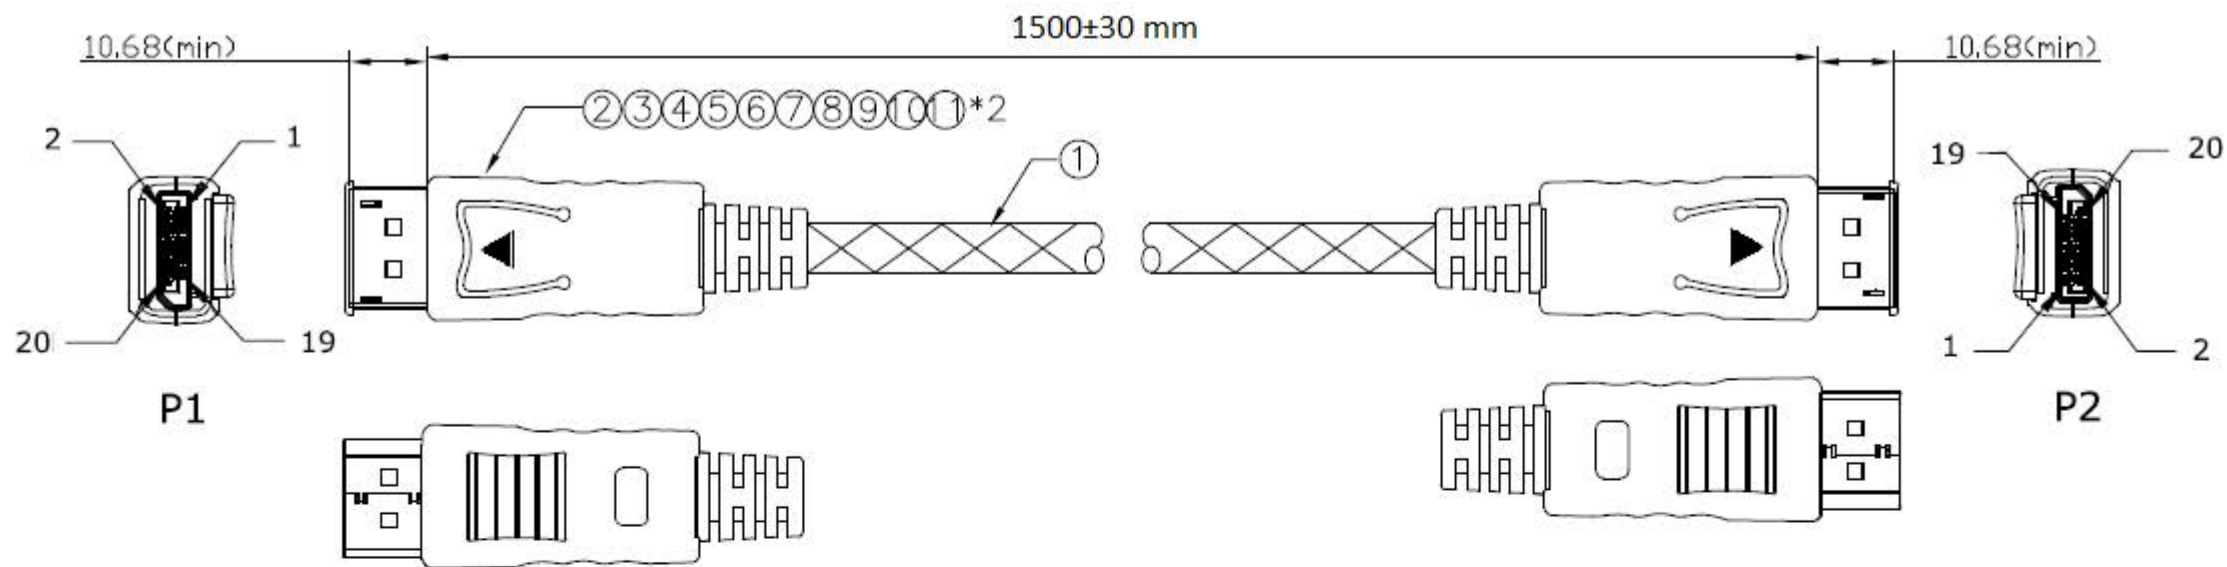

ELECTRICAL TEST:

1. 100% TEST (OPEN, SHORT, MISS WIRE)
2. CONTACT RESISTANCE: 2 ohm MAX.
3. INSULATION RESISTANCE: 10M ohm MIN.
4. HI-POT TEST: DC 300V/10ms

PIN ASSIGNMENT

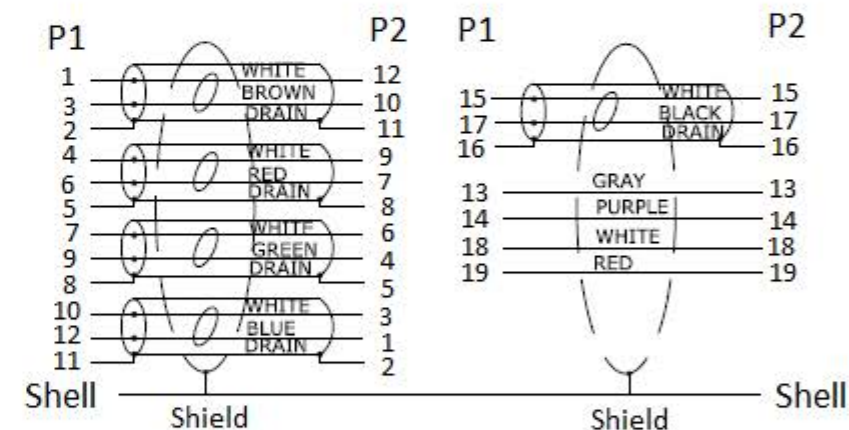

11	W=18mm Double Conductive copper foil	0.18	M
10	Nickel Plating Ling buckle OD: 7.3	2	pcs
9	Transparent PE LDPE	4	g
8	45P Black PVC	10	g
7	Ø1.5 Black Heat Shrinkable Casing	0.034	m
6	DisplayPort M 30AWG Black Tail Clip	2	pcs
5	DisplayPort M Transparent Dust Cover	2	pcs
4	DisplayPort M (DP01#) ABS Shell Color: golden No Print	2	pcs
3	DisplayPort M (DP01#) ABS Shell Color: golden No Print Down	2	pcs
2	DisplayPort M with Latch Black Insulation Shell Gold Plated Contact: 3u	2	pcs
1	UL20276 [30AWG(7/0.10TC)x1P+EAM]x5+30AWG(7/0.10TC)x4C+AL+E(7/0.1TC)+B(16/4/0.12MM 50%AL) OD:6mm Black	1.52	m
NO	DESCRIPTION	Q'TY	UNIT

REV		ECN		SECOMP				
		TOLERANCE						
		INCHES						
		M/M						
.X		.015	.30	ROLINE GOLD DisplayPort Cable DP-DP, M/M, 1.5m				
.XX		.010	.10					
.XXX		.005	.05					
DRAWN BY		Zhouwenlong		ITEM NO.		11.04.5639		
CHECK BY				SCALE	NONE	DRAWING NO.:		REV
				UNIT	MM			A01
APPD BY				DATE	2017.11.24			