



# RBS Panel & Configurator

## ATEN Room Booking System

### User Manual

## Compliance Statements

---

### FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

The device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### FCC Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

#### Warning

Operation of this equipment in a residential environment could cause radio interference.

#### Achtung

Der Gebrauch dieses Geräts in Wohnumgebung kann Funkstörungen verursachen.



#### KCC Statement

유선 제품용 / A 급 기기 ( 업무용 방송 통신 기기 )  
이 기기는 업무용 ( A 급 ) 전자파적합기기로서 판매자 또는 사용자는 이  
점을 주의하시기 바라며, 가정 외의 지역에서 사용하는 것을 목적으로  
합니다.

## Industry Canada Statement

This Class A digital apparatus complies with Canadian ICES-003.

## CAN ICES-003 (A) / NMB-003 (A)

## RoHS

This product is RoHS compliant.

## User Information

---

### Online Registration

Be sure to register your product at our online support center:

International	<a href="http://eservice.aten.com">http://eservice.aten.com</a>
---------------	---

### Telephone Support

For telephone support, call this number:

International	886-2-8692-699
China	86-400-810-0-810
Japan	81-3-61-811
Korea	82-2-467-6789
North America	1-888-999-ATEN ext 4988 1-949-428-1111

## **User Notice**

All information, documentation, and specifications contained in this manual are subject to change without prior notification by the manufacturer. The manufacturer makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties as to merchantability or fitness for any particular purpose. Any of the manufacturer's software described in this manual is sold or licensed *as is*. Should the programs prove defective following their purchase, the buyer (and not the manufacturer, its distributor, or its dealer), assumes the entire cost of all necessary servicing, repair and any incidental or consequential damages resulting from any defect in the software.

The manufacturer of this system is not responsible for any radio and/or TV interference caused by unauthorized modifications to this device. It is the responsibility of the user to correct such interference.

The manufacturer is not responsible for any damage incurred in the operation of this system if the correct operational voltage setting was not selected prior to operation. PLEASE VERIFY THAT THE VOLTAGE SETTING IS CORRECT BEFORE USE.

## **Product Information**

---

For information about all ATEN products and how they can help you connect without limits, visit ATEN on the Web or contact an ATEN Authorized Reseller. Visit ATEN on the Web for a list of locations and telephone numbers:

---

International	<a href="http://www.aten.com">http://www.aten.com</a>
North America	<a href="http://www.aten-usa.com">http://www.aten-usa.com</a>

---



## **Package Contents**

---

Check to make sure that all components are in working order. If you encounter any problem, please contact your dealer.

### **VK430**

Due to a package contents change, you may receive one of the following package editions:

#### **Latest Package Edition**

- ◆ 1 VK430 10.1" RBS Panel with wall mount
- ◆ 1 wall mount kit
- ◆ 2 3M glass mount tape
- ◆ 1 90° RJ-45 cable adapter
- ◆ 1 user instructions

#### **Previous Package Edition**

- ◆ 1 VK430 10.1" RBS Panel with wall mount
- ◆ 2 LED bars
- ◆ 4 LED bar screws
- ◆ 4 hard wall mount screws + screw anchors
- ◆ 2 3M glass mount tape 1 user instructions

# Contents

---

Compliance Statements . . . . .	ii
User Information . . . . .	iii
Online Registration . . . . .	iii
Telephone Support . . . . .	iii
User Notice . . . . .	iv
Product Information . . . . .	iv
Package Contents . . . . .	v
VK430 . . . . .	v
Contents . . . . .	vi
About this Manual . . . . .	ix
Conventions . . . . .	x

## 1. Introduction

Overview . . . . .	1
Features . . . . .	2
VK430 10.1" RBS Panel . . . . .	2
RBS Configurator . . . . .	3
Requirements . . . . .	4
Getting Started . . . . .	5
Accessories . . . . .	6
Components . . . . .	7
VK430 RBS Panel . . . . .	7

## 2. Hardware Setup

10.1" RBS Panel . . . . .	10
Installation . . . . .	10

## 3. RBS Configurator

Installing RBS Configurator . . . . .	13
The Interface . . . . .	15

## 4. Panel Profile

Adding New Profiles . . . . .	17
Editing Profiles . . . . .	18
Editing Profile Names, Duplicating and Deleting Profiles . . . . .	18
Configuring Profiles . . . . .	19
GUI Design . . . . .	20
Overview . . . . .	20

Blurring the Background . . . . . 21  
 Booking Settings . . . . . 23

**5. Calendar Server**

Microsoft 365. . . . . 25  
     Microsoft 365 Admin Center . . . . . 26  
         Adding User Accounts . . . . . 26  
         Adding Room (Resource) Accounts . . . . . 27  
         Setting Administrator Account to Record Room Usage Details . . 28  
         Turning Off Multi-factor Authentication (MFA) . . . . . 29  
     Azure Active Directory . . . . . 30  
         Registering Application . . . . . 30  
         Adding API Permissions . . . . . 32  
     ATEN RBS Configurator . . . . . 35  
         Configuring Room Grouping . . . . . 37  
 Microsoft Exchange Server . . . . . 39  
     Microsoft Exchange 2010 . . . . . 41  
         Create a Room Mailbox . . . . . 41  
         Assign the Delegate to the Room Mailbox . . . . . 46  
         Set up Password for the Room Mailbox . . . . . 49  
         Add the Room Mailbox to a Room List (Distribution Group) . . . . 51  
         Setting Up Room Grouping . . . . . 55  
     Microsoft 2013 / 2016 / 2019 . . . . . 56  
         Exchange Admin Center (EAC) . . . . . 56  
         Create a Room Mailbox . . . . . 58  
         Set the Delegate for the Room Mailbox . . . . . 61  
         Add the Room Mailbox to a Room List (Distribution Group) . . . . 62  
     Calendar Settings in ATEN RBS Configurator . . . . . 65  
         Checking the Host Name and Domain . . . . . 66  
         Setting Up Room Grouping . . . . . 69  
     Google Workspace . . . . . 70  
         Setting Up Google Workspace for Room Management . . . . . 71  
         Adding Rooms, Buildings, and Users . . . . . 73  
         Enabling Google Calendar and Admin API . . . . . 77  
         Creating a Service Account . . . . . 79  
         Authorizing Access from Third-party Applications . . . . . 80  
     Panel Message . . . . . 82  
         Disconnection Message . . . . . 82  
         Support Contact . . . . . 83

**6. Panel Management**

RBS Panel Search . . . . . 85  
 Panel Management Options . . . . . 86

Uploading Profiles and Setting Changes to ATEN RBS Panels . . . . .	87
Batch Configure . . . . .	89
Upgrading the RBS Panel Firmware . . . . .	91
Updating the RBS Panel App . . . . .	93

## 7. Panel Password

Defining Passwords Directly on the Panels . . . . .	95
Changing the Passwords of RBS Panels . . . . .	96
Changing the Password of One RBS Panel via the Panel . . . . .	96
Changing the Passwords of Multiple RBS Panels by Batch . . . . .	96

## 8. Panel Operation

Panel Main Page . . . . .	99
Viewing Meeting Schedule . . . . .	101
Today's Scheduled Meetings . . . . .	101
Meetings Scheduled on Other Dates / for Other Rooms . . . . .	101
Booking a Room . . . . .	103
Using the Calendar . . . . .	103
Using the Suggest Room Function . . . . .	104
Administrator Settings . . . . .	106
Enabling / Disabling Access to Basic Panel Settings . . . . .	106
Configuring Network Settings . . . . .	107
Setting the Password . . . . .	108
Demo Mode . . . . .	109
Enabling Demo Mode . . . . .	109
Disabling Demo Mode . . . . .	110

## Appendix

Safety Instructions . . . . .	111
General . . . . .	111
Specifications . . . . .	113
VK430 . . . . .	113
Technical Support . . . . .	115
International . . . . .	115
North America . . . . .	115
ATEN Standard Warranty Policy . . . . .	116

## About this Manual

This user manual is provided to help you get the most out of your ATEN Room Booking System. It covers all aspects of the system, including RBS Panel and RBS Configurator installation, configuration, and operation:

Devices and software covered in this manual include:

Models	Product Names
VK430	10.1" Room Booking System (RBS) Panel
RBS Configurator	Room Booking System (RBS) Configurator

An overview of the information found in the manual is provided below.

### Chapter 1, Introduction

Introduces you to the ATEN Room Booking System, its purpose, features, and components.

### Chapter 2, Hardware Setup

Provides the necessary steps to set up the ATEN Room Booking System, along with some basic operations.

### Chapter 3, Configurator Installation

Provides the basic information and installation instructions of the ATEN RBS Configurator.

### Chapter 4, Panel Profile

Guides you through how to configure and customize layout design profiles to be applied to the ATEN RBS Panels managed.

### Chapter 5, Calendar Server

Guides you through the implementation of your ATEN Room Booking System to calendar servers, such as Microsoft 365 Calendar, for convenient scheduling management of all conference rooms in the system.

### Chapter 6, Panel Management

Covers how to upload projects to and configure the ATEN RBS Panels managed.

### Chapter 7, Panel Password

Guides you through how to define and change the passwords of your ATEN RBS Panels.

## Chapter 8, Panel Operation

Guides you through the operations that can be done on ATEN RBS Panels, including booking or checking into rooms.

### Appendix

Provides specifications and other technical information regarding the ATEN Room Booking System.


---

#### Note:

- ◆ Read this manual thoroughly and follow the installation and operation procedures carefully to prevent any damage to the unit or connected devices.
  - ◆ ATEN regularly updates its product documentation for new features and fixes. For an up-to-date ATEN RBS documentation, visit <http://www.aten.com/global/en/>
- 

## Conventions

This manual uses the following conventions:

- |   |  |
|---|--|
| Monospaced  | Indicates text that you should key in.   |
| [ ]   | Indicates keys you should press. For example, [Enter] means to press the <b>Enter</b> key. If keys need to be chorded, they appear together in the same bracket with a plus sign between them: [Ctrl+Alt]. |
| 1.  | Numbered lists represent procedures with sequential steps.   |
| ◆   | Bullet lists provide information, but do not involve sequential steps.   |
| >   | Indicates consecutive selecting options (such as on a menu or dialog box). For example, Start > Run means to open the <i>Start</i> menu, and then select <i>Run</i> .                                      |
|  | Indicates critical information.  |

# Chapter 1

## Introduction

### Overview

---

The ATEN Room Booking System is an Ethernet-based room management system that works in conjunction with a calendar server, such as Microsoft 365 Calendar and Google Workspace, to provide convenient scheduling, availability allocation, reservation, and status indication for all of the rooms managed in your organization.

ATEN Room Booking System consists of VK430 RBS Panels, 1 for each room managed, and an RBS Configurator used to configure the RBS Panels and calendar server.

Through ATEN Room Booking System, users can check for the availability of every room, book the desired rooms while scheduling meetings, as well as cancel or extend their room booking.

On each VK430 RBS Panel, you can check the time slots the corresponding room is available for and reserve immediately or for a desired time with a few simple taps.

Using RBS Configurator, the administrator can adjust the theme style and setting profiles of each VK430 RBS Panel.

The ATEN Room Booking System is the perfect solution for any meeting and conference room, boardroom, classroom, and any other room booking management through streamlined Ethernet-based management system in conjunction with a calendar server for optimum efficiency and performance.

## Features

---

### **VK430 10.1” RBS Panel**

- ◆ 10.1” capacitive touch-screen panel
- ◆ Supports integration with calendar servers, such as Microsoft 365 Calendar, Google Workspace Calendar, and Microsoft Exchange Server
- ◆ Supports RBS Configurator for batch upgrade, customizable booking options, and calendar settings.
- ◆ Supports central management through ATEN Unizon to allow administrators to monitor managed devices in real time, generate room usage analyses, and update app in batch
- ◆ Supports TCP for third-party system integration
- ◆ Supports Power over Ethernet (PoE), which allows the RBS panel to receive power and communication over a single Ethernet cable
- ◆ LED light bars illuminating user-defined colors to indicate the room’s availability at a glance
- ◆ Pre-installed with a wall mount kit and provided with 3M VHB™ Tape for easy mounting onto a hard or glass wall
- ◆ 75\*75 mm VESA-compliant for flexible mounting across various installation scenarios
- ◆ TCP CLI compliant

---

#### **Note:**

- ◆ To manage RBS panels using ATEN Unizon™, make sure to update the RBS App to v1.3.123 or later.
  - ◆ For more information on ATEN Unizon™, refer to *ATEN Unizon™ User Manual*.
-



## **RBS Configurator**

- ◆ Easy RBS panel configuration via intuitive GUI
  - ◆ Profile setup (logo, background, calendar layout, etc.)
  - ◆ System settings (language, sleep mode, brightness, volume, etc.)
  - ◆ Panel management (firmware upgrades and profile uploads)
- ◆ Simulator to simulate and preview the customized GUI before uploading
- ◆ Flexible booking options for different application scenarios and user preferences
- ◆ Supports mainstream calendar servers, including Microsoft 365 Calendar and Google Workspace Calendar, and Microsoft Exchange Server

## Requirements

---

Prepare the following equipment and make sure your equipment meets the minimum requirements specified below.

- ◆ **Rooms to be managed by your ATEN Room Booking System, with the following equipment**
  - ◆ 1 VK430 ATEN 10.1” RBS Panel per room
  - ◆ 1 available PoE+ port per room, from a PoE switch / injector or 1 power adapter (available for purchase, see *Accessories*, page 6)
- ◆ **A computer (for running ATEN RBS Configurator), with the following spec**
  - ◆ OS: Windows 7 / 8 / 10 (32/64-bit)
  - ◆ Processor: 1 GHz
  - ◆ Memory: 1 GB RAM
  - ◆ Storage: 500 MB available hard disk space

## Getting Started

---

Complete the following tasks to start setting up your ATEN Room Booking System and managing your room resources.

No.	Getting Started Tasks	Detailed Procedure
1	Install an ATEN RBS Panel, using the pre-installed wall mount (and 3M mount tape), for each of the room to be managed by your ATEN Room Booking System.	<i>Installation</i> , page 10
2	Install a configuration tool, ATEN RBS Configurator to a computer that has network access to the installed RBS panel(s).	<i>Installing RBS Configurator</i> , page 13
3	Define a desired layout and theme style to for the installed ATEN RBS Panels.	Chapter 4, <i>Panel Profile</i>
4	By default, the RBS panel is DHCP-enabled. Configure the network settings if needed.	<i>Configuring Network Settings</i> , page 107
5	Set up the calendar server for ATEN Room Booking System.	Chapter 5, <i>Calendar Server</i>
6	Upload the configured profiles and settings to the ATEN RBS Panels.	<i>Uploading Profiles and Setting Changes to ATEN RBS Panels</i> , page 87

## Accessories


---

Optionally purchase any compatible power adapter and/or power cord if needed, as listed below. Contact your ATEN dealer for details.

Model	Description	Region
0AD8-8012-33MG	power adapter	all
LIN2-418K-D12G	power cord	A
LIN2-418K-E12G	power cord	E
LIN2-418K-D16G	power cord	J
LIN2-418K-F11G	power cord	U
LIN2-418K-N12G	power cord	I
LIN2-418K-G11G	power cord	G
LIN2-418K-Z11G	power cord	Z
LIN2-418K-K11G	power cord	K

# Components

## VK430 RBS Panel

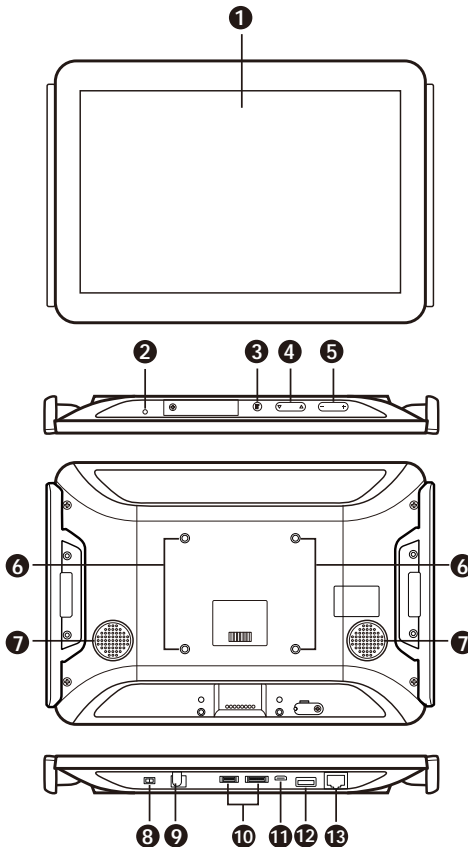

No.	Component	Description
1	touch screen	Tap to configure or reserve the corresponding room.
2	status LED	Lights on when the touch panel is powered on.
3	function button	Press to access the <i>Settings</i> page.
4	brightness + / -	Press to adjust the display brightness.

No.	Component	Description
5	volume + / -	Press to adjust the volume of the touch panel.
6	screw holes for panel plate	Used to secure the panel plate.
7	speakers	Plays beep sounds to indicate operation actions.
8	power switch	Turns the touch panel on or off.
9	power jack	Connects to power.
10	reserved for debugging purposes	These ports are reserved for debugging.
11	USB Micro-B port	Reserved for debugging.
12	USB type-A port	Used to update the ATEN RBS app and/or firmware.
13	LAN port with PoE	Connects to the network, while receiving power via PoE.

## Chapter 2

# Hardware Setup



Important safety information regarding the placement of this device is provided on *Safety Instructions*, page 111. Please review it before proceeding.

This chapter guides you through the hardware setup of ATEN RBS device as well as cover some of its basic configurations.

The RBS device covered includes:




Model	Product Name	Page
VK430	10.1" RBS Panel	p.10

For the installation and configuration of ATEN RBS Configurator, please refer to *RBS Configurator*, page 13, and *Panel Management*, page 85.

## 10.1" RBS Panel

### Installation

The ATEN VK430 RBS Panel comes pre-installed with two light bars. The RBS panel is also compatible with any VESA-compliant (75 x 75 mm) mounting accessory. Follow the steps below to install and mount the VK430 onto a wall.

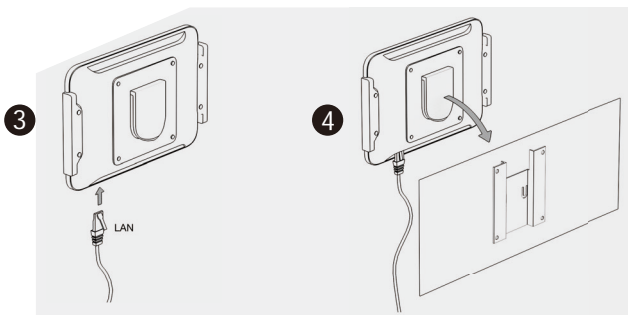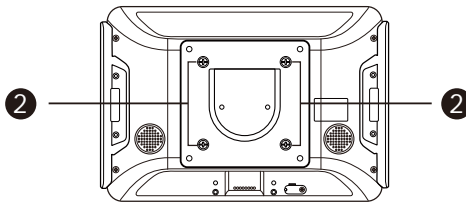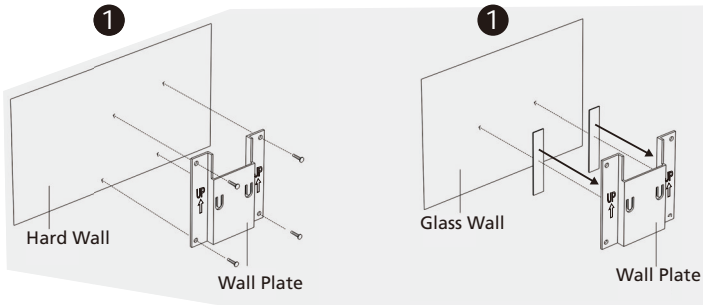



1. Secure the wall plate onto a (a) hard or (b) glass wall.
  - ♦ *Hard Wall:* Using the 4 screws provided (also use the 4 screw anchors if necessary), secure the wall plate onto the hard wall with the arrows on the plate pointing upward.
  - ♦ *Glass Wall:* Stick the 2 strips of tape provided to the back of the wall plate, and then press the wall plate onto the glass wall, with the arrows on the plate pointing upward.

---

**IMPORTANT:** For optimal adhesive results, make sure to firmly press the taped mounting plate against the wall for 3 ~ 5 seconds and wait for it to dry for at least 24 hours.

---

2. Secure the provided panel plate to the back of the RBS panel using the short screws provided.
3. Using the 90° RJ-45 cable adapter provided and an Ethernet cable, connect the RBS panel to a PoE switch / injector to provide power and access to network.

---

**Note:** Make sure that the RBS panel receives adequate power supply (DC12V, 17.8W, 60.70BTU or PoE 20W, 68.24BTU). With inadequate power supply, processes such as firmware updates and app updates may fail.

---

4. Place the RBS panel onto the wall by sliding and attaching it to the wall plate.
5. Turn on the RBS panel by switching its power switch to **ON**.

Upon first-time startup, the VK430 shall be offline and not connected to any calendar server.

To set up the VK430, you shall use the ATEN RBS Configurator software to create the necessary setting profiles to be uploaded to it. See *RBS Configurator*, page 13.

This Page Intentionally Left Blank

# Chapter 3

## RBS Configurator


The ATEN RBS Configurator is a GUI-based management software that helps you configure mass RBS panels for convenient management of your conference room resources against a calendar server, including Microsoft 365 Calendar and Google Workspace.

### Installing RBS Configurator

---

To install the RBS Configurator software, do the following:


1. Download RBS Configurator.
  - a) Visit the ATEN download page.  
<http://www.aten.com/global/en/support-and-downloads/downloads/>
  - b) Search for “RBS Configurator.” A list of downloads for RBS Configurator appears.
  - c) Download **RBS\_Configurator\_Setup\_vx.x.xxx.exe**.
2. Execute the setup file. Then follow the on-screen instructions to install the RBS Configurator.

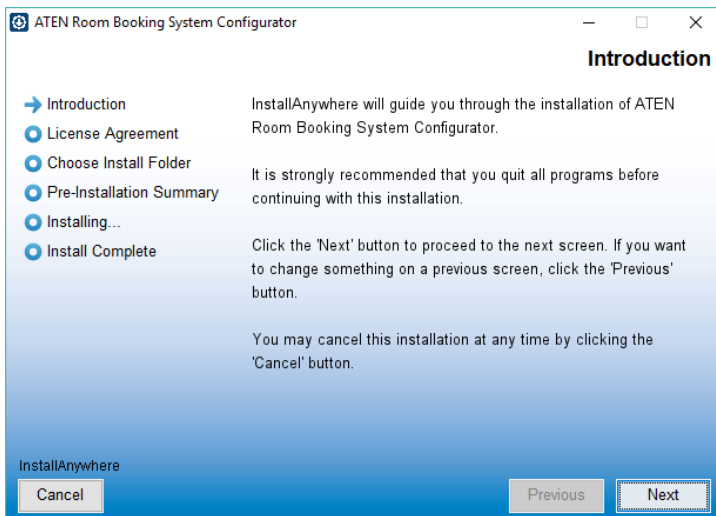

**Note:** On the *License Agreement* page, thoroughly read through and accept the terms of the license agreement before proceeding.


---

3. Once the installation is completed, click **Done** to finish.

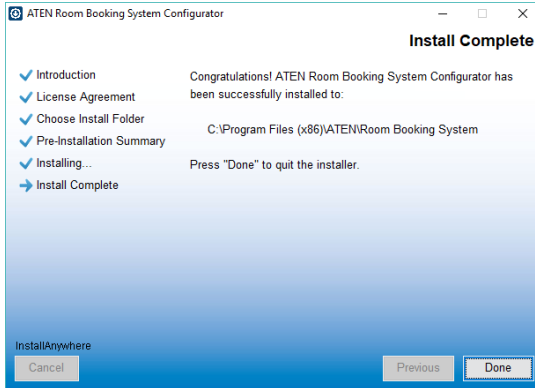

## The Interface

Launch the software to start configuring your ATEN Room Booking System. Below is the general interface of RBS Configurator and its components.

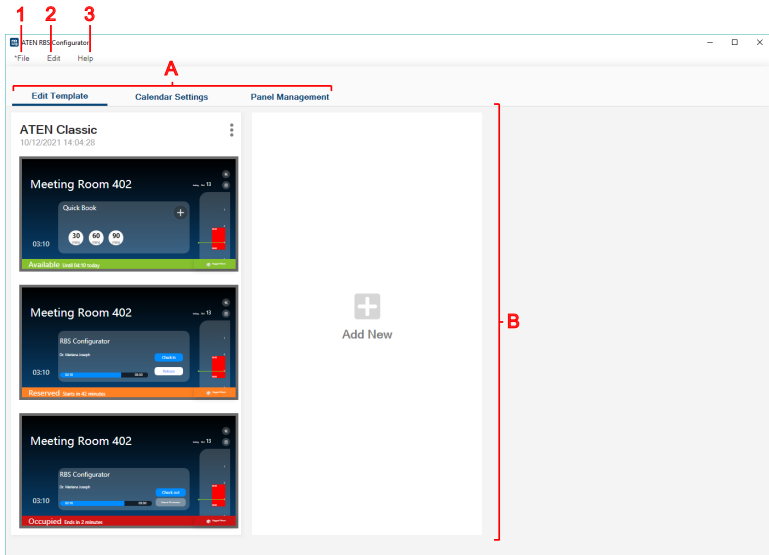

No.	Item	Description
A	Tab Menu	<p>Use the main selection menu for switching views between the following:</p> <ul style="list-style-type: none"> <li>◆ <b>Edit Template:</b> Defines layout designs to be applied to the RBS panels managed.</li> <li>◆ <b>Calendar Settings:</b> Contains the required calendar server settings for integration with ATEN Room Booking System.</li> <li>◆ <b>Panel Management:</b> Upload and/or edit setting profiles to ATEN RBS Panels via network.</li> </ul>
B	Interactive Display	This section is your main work area, which reflects the tab menu item selected.

No.	Item	Description
1	File	<ul style="list-style-type: none"> <li>◆ <b>New Project:</b> Clears the current project and start a new one.</li> <li>◆ <b>Open Project:</b> Opens a previously-saved project file.</li> <li>◆ <b>Save:</b> Saves the current project.</li> <li>◆ <b>Save as:</b> Saves the current project as a new project file.</li> <li>◆ <b>Exit:</b> Exits and closes RBS Configurator.</li> </ul>
2	Edit	<ul style="list-style-type: none"> <li>◆ <b>Language:</b> Changes the <i>language</i> of the RBS Configurator.</li> </ul>
3	Help	<ul style="list-style-type: none"> <li>◆ <b>About:</b> Displays the information of the RBS Configurator.</li> </ul>


# Chapter 4

## Panel Profile

The **Edit Profile** tab, in ATEN RBS Configurator, allows you to customize layout design profiles and define booking settings to be applied to any ATEN RBS Panels managed.


### Adding New Profiles


In RBS Configurator, click **Add New** to create a new profile, as illustrated below.

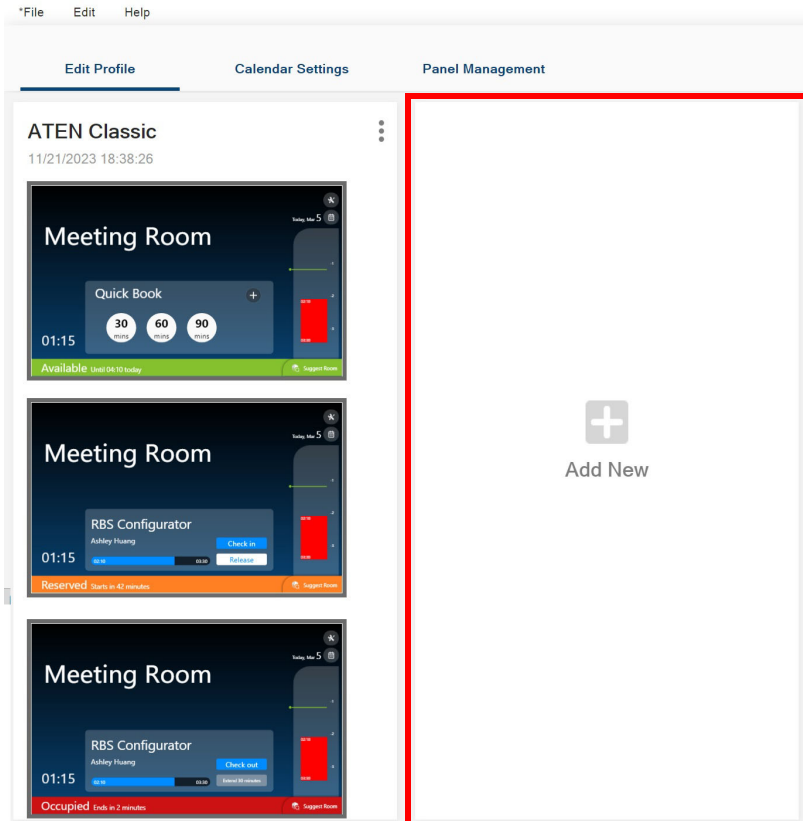

## Editing Profiles

### Editing Profile Names, Duplicating and Deleting Profiles

In RBS Configurator, click the  button of a panel profile to access the following options:

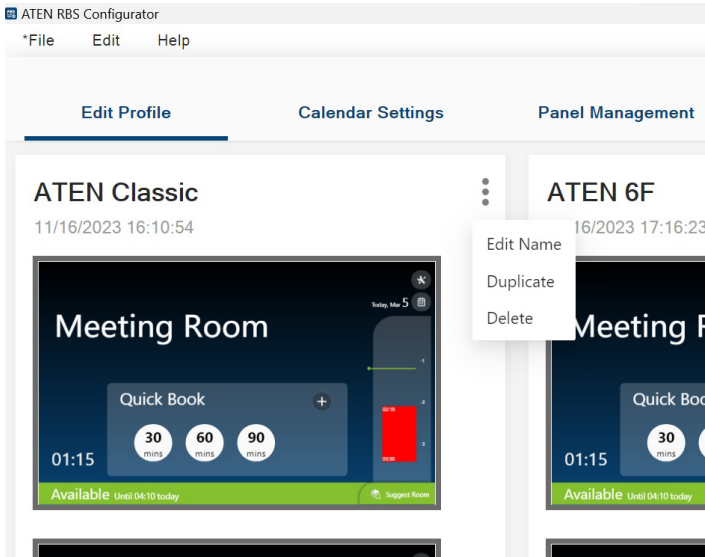


Item	Description
Edit Name	Edits the name of the profile.
Duplicate	Creates a duplicate of the profile.
Delete	Deletes the profile.



## Configuring Profiles

In RBS Configurator, click on a desired profile to start. The following page appears.

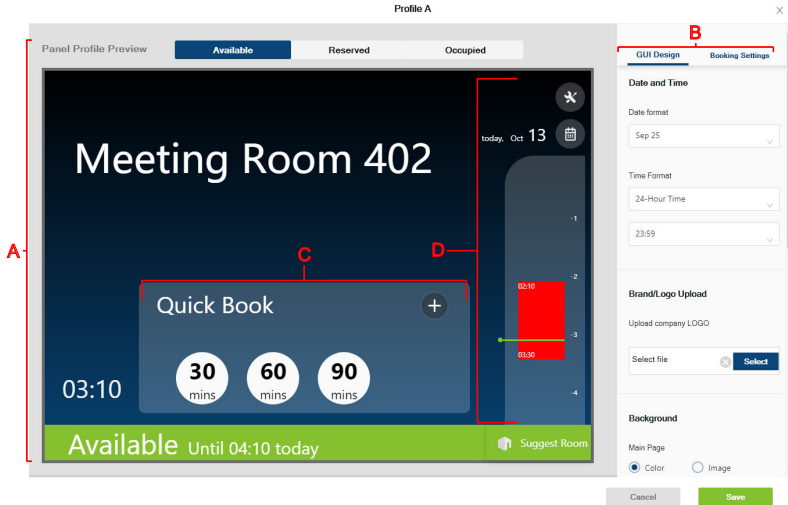

No.	Item	Description
A	Panel Profile Preview	Displays an example of how the panel layout would look like once the profile is applied.
B	Interactive Display	Contains the following: <ul style="list-style-type: none"> <li>◆ <b>GUI Design:</b> Defines the profile's layout design related settings.</li> <li>◆ <b>Booking Settings:</b> Sets the profile's booking-related settings</li> </ul>
C	Check-in Panel	Used for checking-in to a meeting room and quick booking.
D	Daily Schedule Area	Displays the room's reservation schedule for the day.

## GUI Design

### Overview

Item	Sub-Item	Description
Date and Time	Date Format	Sets the format in which date is displayed on the RBS Panel.
	Time Format	Sets the format in which time is displayed on the RBS Panel.
Brand/Logo Upload	Upload Company Logo	Uploads a brand logo image (.jpg, .jpeg, .png, or .bmp), up to 140*970 pixels, to be displayed on the upper-left of the RBS Panel.
Background	Main Page	Defines the background of the RBS Panel's main page, either by selecting a color or uploading an image (.jpg, .jpeg, .png, or .bmp), up to 1280*732 pixels.
	Blur Background	Enable to show the background shown in gradient color. For more details, see <i>Blurring the Background</i> , page 21.
	Sub Page	Sets the display style of the RBS Panel's sub page.
Time Color		Sets the color in which time is displayed on the RBS Panel.
Check-in Panel Color		Sets the color of the RBS Panel's check-in panel.
Daily Schedule Area	Icon Color	Sets the color of icons on the RBS Panel's daily schedule area.
	Display Style	Sets the display style and color of the RBS Panel's daily schedule area.
Status Color	Available	Sets the color of the LED bars of the RBS Panel, and its status color, when it is available for use.
	Reserved	Sets the color of the LED bars of the RBS Panel, and its status color, when it is reserved for a meeting.
	Occupied	Sets the color of the LED bars of the RBS Panel, and its status color, when it is occupied.
Screen Saver	Show screen saver after	Select an idle time to display the screen saver when the RBS panel has idled for the selected duration. By default, the screen saver is enabled and set to display when RBS panel has idled for 5 minutes.
	Text Color	Sets the text color of the screen saver.

## Blurring the Background

Use the **blur background** function to have the Quick Book controls stand out by applying color gradient to the background, as show below.




Disable the blur background function to use the chosen background without the gradient effect, as shown below.



To access the blur background setting:

1. In RBS Configurator, open the profile file.
2. Click on the target template. The configuration page appears.

3. Under GUI Design, scroll down to find **Blur Background**.

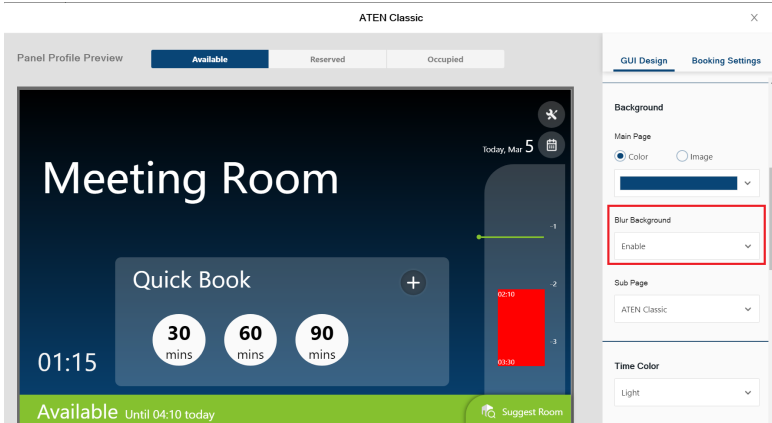

4. Configure the setting and click **Save** to apply the change.

## **Booking Settings**

<b>Item</b>	<b>Sub-Item</b>	<b>Description</b>
Quick Booking, Suggest Room, Calendar Bookings		Enable to allow quick booking options to be available on the RBS Panel's check-in panel.
Room Utilization Optimization		<p>Enable to:</p> <ul style="list-style-type: none"> <li>◆ optimize room usage by releasing the room when not checked in within the defined time frame.</li> <li>◆ allow meeting extension, early check-in, and delayed check-in.</li> </ul> <p>When disabled, a room will not be released if not checked in, and will not support early/delayed check-in and reservation extension.</p>
Extend meeting		Enable to allow meeting extension.
Allow check-in before the scheduled time by		Sets the amount of time allowed for early check-in.
Hold for		Sets the amount of time allowed for late check-in before being released.
Display Host Name		Enable to display the name of the host who's scheduled the meeting.
Working Hours	Calendar Server	Adopt the working hours as specified in the connected calendar server.
	Manual	Set up the working hours for the room booking system.
	Brightness	Sets the brightness of the RBS Panel during off-duty hours.

Click **Save** for changes to take effect.

This Page Intentionally Left Blank

# Chapter 5

## Calendar Server

This chapter guides you through the implementation of your ATEN Room Booking System to calendar servers supported, including Microsoft365 Calendar, Microsoft Exchange Server, and Google Workspace, for convenient scheduling management of all conference rooms in the system.

### Microsoft 365

---

To set up a Microsoft 365 Calendar for managing your ATEN Room Booking System, follow the steps below.

1. Using the Microsoft 365's administrator account, do the following:
  - ◆ Add a user account for every person who is allowed to book room resources through the Microsoft 365 calendar server.
  - ◆ Add a resource account, while setting a password, for every conference room to be managed by the Room Booking System.
  - ◆ Configure the administrator account to retrieve detailed information of the rooms managed from the calendar server.
  - ◆ Make sure that multi-factor authentication (MFA) is disabled.
  - ◆ Through Microsoft 365's Azure Active Directory, register for an APP ID and add the required API permission for the Room Booking System.

---

**Note:** For detailed procedures, see *Microsoft 365 Admin Center*, page 26 and *Azure Active Directory*, page 30.

---

2. On your ATEN RBS Configurator, go to the Calendar Settings tab, select Microsoft 365 and do the following:
  - ◆ Enter the Microsoft 365's delegate account information, and application ID.
  - ◆ Select a setting for **Room Grouping**. This is a setting that helps refine the list of available rooms that appear when using the Suggest Room function on RBS panels.

---


**Note:** For details, see *ATEN RBS Configurator*, page 35.

---

3. If you have chosen to enable Room Grouping, configure your calendar server using PowerShell. For detailed steps, see *Setting Up Room Grouping*, page 55.

### **Microsoft 365 Admin Center**


To start, log into <https://login.microsoftonline.com> using the Microsoft 365's administrator account and click **Admin**.



### **Adding User Accounts**

Add a user account for every person who is allowed to book room resources through the Microsoft 365 calendar server, by doing the following:

1. Go to **Navigation Menu > Users > Active Users** and click **Add a user**.

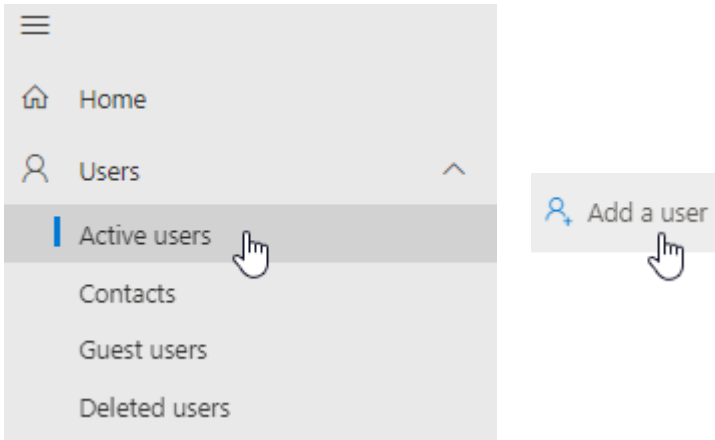


2. Follow the on-screen instructions to create the user account.




## Adding Room (Resource) Accounts

Add a room account, and set a required password, for every conference room to be managed by ATEN RBS, by doing the following:

1. Go to **Navigation Menu > Resources > Rooms & equipment** and click **Add resource**

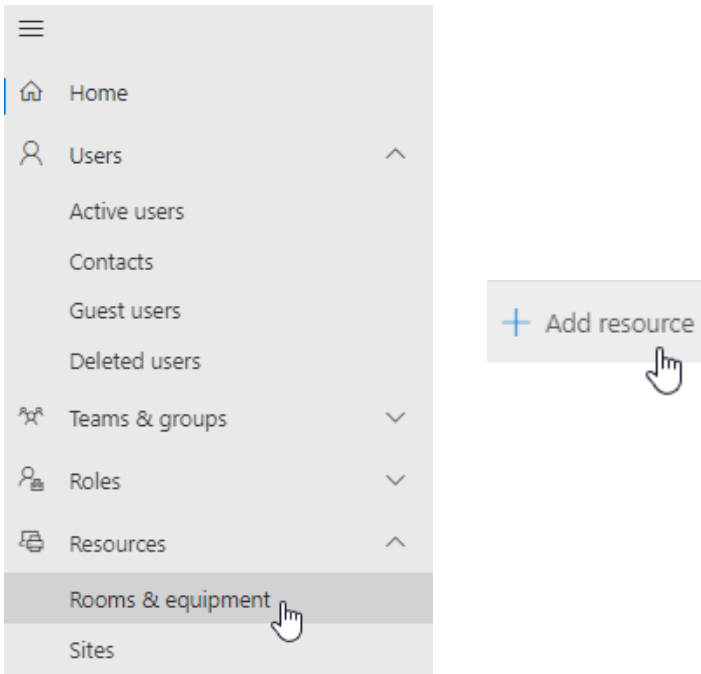

2. Select **Room** from the *Resource type* drop-down list and then follow the on-screen instructions to create the room account.

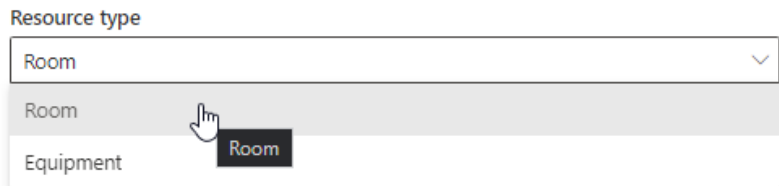

3. Go to **Navigation Menu > Users > Active Users**, click **Reset a password** next to the room account created from step 2 and follow the on-screen instructions to define its password.

---


**Note:** Make sure a password has been set for every room account created.

---

## Setting Administrator Account to Record Room Usage Details

Configure the administrator account to record the necessary conference room usage details, by doing the following:

1. Go to **Navigation Menu > Resources > Rooms & equipment** and select and click any of the room accounts you want their usage details to be recorded for

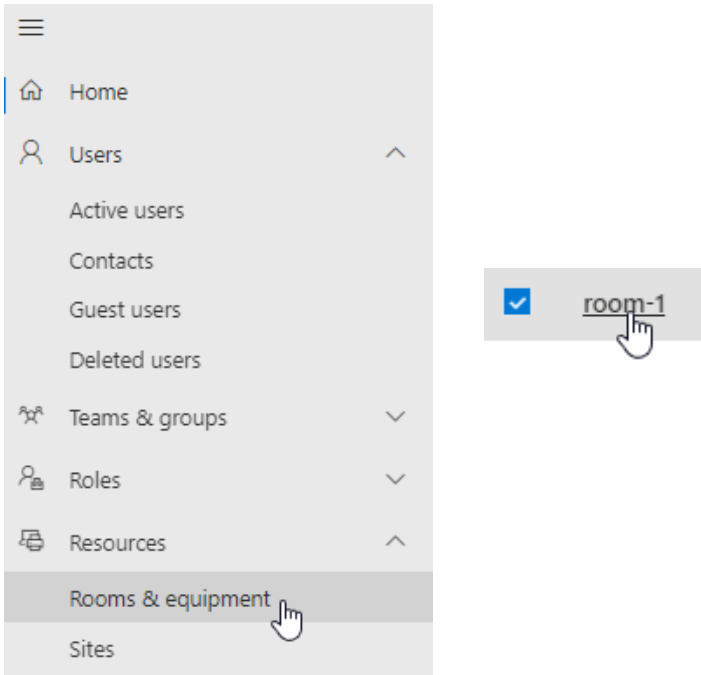


2. On the room account info dialog box that appears, click **Edit** under *Delegates*.

**Delegates (0)**

[Edit](#)

3. In the *Manage delegates* drop-down list, type, search for, and select the administrator account used to manage the conference rooms, and their room accounts, and then click **Save changes**.

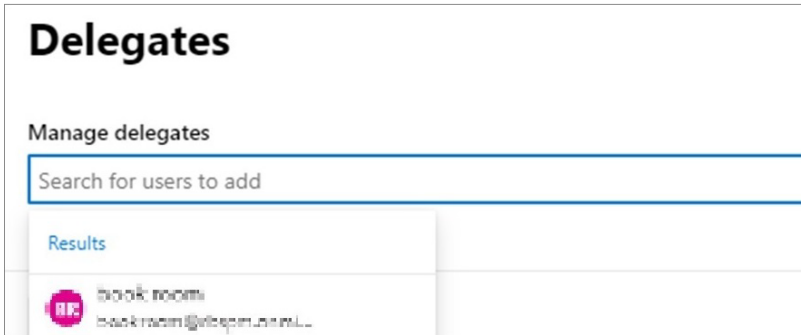


**Delegates**

Manage delegates

Search for users to add

Results

	book room	bookroom@telepresence.com...
---	-----------	------------------------------


4. Repeat steps 1 ~ 3 for every room account.

### Turning Off Multi-factor Authentication (MFA)

1. Go to **Navigation Menu > Users > Active users > Multi-factor authentication**.
2. Disable MFA for both the delegate and resource accounts.

## Azure Active Directory


From *Microsoft 365 admin center*, go to **Navigation Menu > Admin centers** and select **Azure Active Directory**.

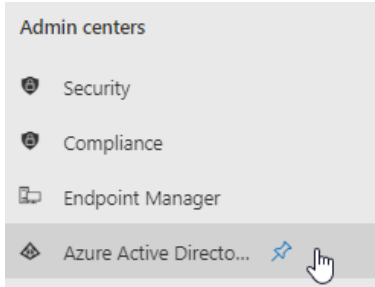

## Registering Application

Register to obtain an Application ID for the ATEN Room Booking System, by doing the following:

1. Go to **Microsoft Entra admin center > Applications > App registrations** and click **New Registration**.

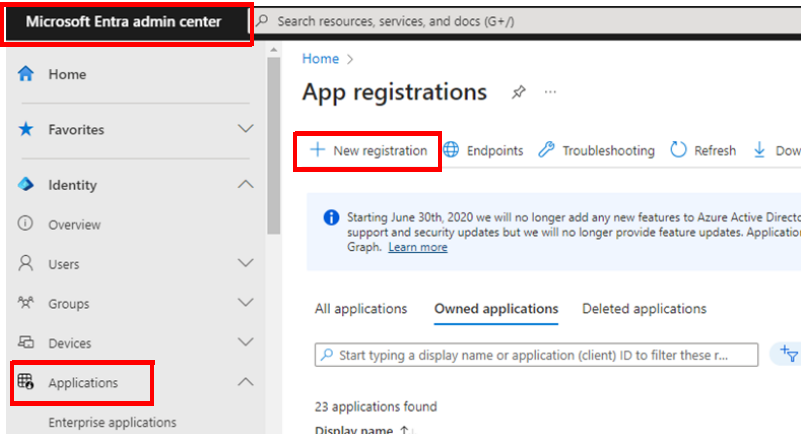

2. Enter a desired name, select **Accounts in this organizational directory only** under *Supported account types*, and click **Register**.

### Register an application

**\* Name**  
The user-facing display name for this application (this can be changed later).

**Supported account types**  
Who can use this application or access this API?

Accounts in this organizational directory only (rbspm only - Single tenant)

Accounts in any organizational directory (Any Azure AD directory - Multitenant)

Accounts in any organizational directory (Any Azure AD directory - Multitenant) and personal Microsoft accounts (e.g. Skype, Xbox)

Personal Microsoft accounts only

[Help me choose...](#)

By proceeding, you agree to the [Microsoft Platform Policies](#)

**Register**

3. Once registered successfully, the **Application ID** is displayed, which shall later be entered on your ATEN RBS Configurator.

^ Essentials

Display name  
RBS\_APP


Application (client) ID  
**01d9e10e0-e076-40e0-9e7b-d15025f07500**

Object ID  
d0d70b35-6fbc-4bf4-8e2e-dd494d50e557

Directory (tenant) ID  
71e111e32-c0e3-4d2e-80d1-c2c2af0a772111

Supported account types  
My organization only


- After registering, go to **Authentication**, enable *Allow public client flows* by selecting **Yes**. Then click **Save** for the changes to take effect.

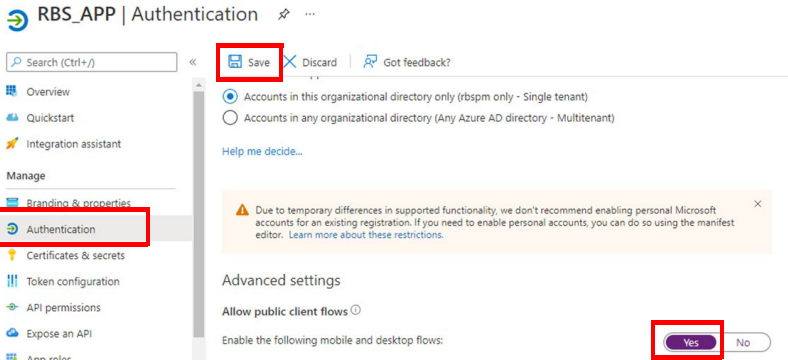

## Adding API Permissions

After registering the application, also make sure the required API permissions have been applied to it, by doing the following:


- Click **API permissions** > **Add a permission**, and select **Microsoft Graph** > **Delegated permissions**

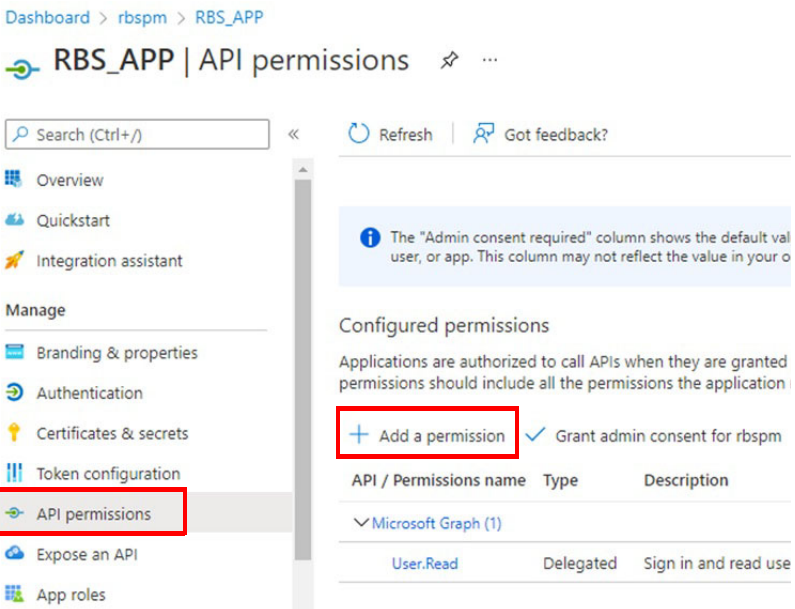


Select an API

**Microsoft APIs** APIs my organization uses My APIs

Commonly used Microsoft APIs




**Microsoft Graph**  
Take advantage of the tremendous amount of data in Office 365, Enterprise Mobility + Security, and Windows 10. Access Azure AD, Excel, Intune, Outlook/Exchange, OneDrive, OneNote, SharePoint, Planner, and more through a single endpoint.

 **Microsoft Graph**  
<https://graph.microsoft.com/> [Docs](#) [?](#)

What type of permissions does your application require?

**Delegated permissions**  
Your application needs to access the API as the signed-in user.



## 2. Select and enable the following permissions:

- ◆ 4 Calendar permissions

∨ Calendars (4)

<input checked="" type="checkbox"/>	Calendars.Read ⓘ Read user calendars	No
<input checked="" type="checkbox"/>	Calendars.Read.Shared ⓘ Read user and shared calendars	No
<input checked="" type="checkbox"/>	Calendars.ReadWrite ⓘ Have full access to user calendars	No
<input checked="" type="checkbox"/>	Calendars.ReadWrite.Shared ⓘ Read and write user and shared calendars	No

◆ 1 Place permission

▼ Place (1)

<input type="checkbox"/>	Place.Read ⓘ Read user places	No
<input checked="" type="checkbox"/>	Place.Read.All ⓘ Read all company places	Yes
<input type="checkbox"/>	Place.Read.Shared ⓘ Read user places for delegates	No
<input type="checkbox"/>	Place.ReadWrite ⓘ Read and write user places	No
<input type="checkbox"/>	Place.ReadWrite.All ⓘ Read and write organization places	Yes

◆ 2 User permissions

▼ User (2)

<input type="checkbox"/>	User.Export.All ⓘ Export user's data	Yes
<input type="checkbox"/>	User.Invite.All ⓘ Invite guest users to the organization	Yes
<input type="checkbox"/>	User.ManageIdentities.All ⓘ Manage user identities	Yes
<input checked="" type="checkbox"/>	User.Read ⓘ Sign in and read user profile	No
<input checked="" type="checkbox"/>	User.Read.All ⓘ Read all users' full profiles	Yes
<input type="checkbox"/>	User.ReadBasic.All ⓘ Read all users' basic profiles	No
<input type="checkbox"/>	User.ReadWrite ⓘ Read and write access to user profile	No
<input type="checkbox"/>	User.ReadWrite.All ⓘ Read and write all users' full profiles	Yes

3. Click **Add permissions**.

4. Click **Grant admin consent for your account**, as illustrated below, and then click **Yes** to finish.

+ Add a permission ✔ Grant admin consent for rbspm

API / Permissions na...	Type	Description	Admin consent req...	Status
▼ Microsoft Graph (7)				
Calendars.Read	Delegated	Read user calendars	No	✔ Granted for rbspm
Calendars.Read.Sha	Delegated	Read user and shared calendars	No	✔ Granted for rbspm



**Grant admin consent confirmation.**

Do you want to grant consent for the requested permissions for all accounts in aten3562? This will update any existing admin consent records this below.



## **ATEN RBS Configurator**


On your RBS Configurator, go to **Calendar Settings > Microsoft 365** and enter the Microsoft 365 Calendar related settings, as below.

The screenshot shows the ATEN RBS Configurator interface. At the top, there are three tabs: 'Edit Profile', 'Calendar Settings' (which is selected and underlined), and 'Panel Management'. On the left side, there is a sidebar menu with the following items: 'Calendar' (expanded), 'Microsoft 365' (selected and highlighted in blue), 'Google Workspace', 'Exchange', 'Room Booking System' (expanded), and 'Panel Message'. The main content area is titled 'Microsoft 365' and contains the instruction: 'Specify the delegated account you created for the resource rooms.' Below this, there are three input fields: 'Delegate Account', 'Delegate Password', and 'Application ID'. The 'Delegate Account' and 'Delegate Password' fields are stacked vertically, and the 'Application ID' field is below them.

- ◆ **Delegate Account:** Enter the name of the Microsoft 365 Calendar's delegate account.
- ◆ **Delegate Password:** Enter the password of the Microsoft 365 Calendar's delegate account.
- ◆ **Application ID:** Enter the Application ID of the ATEN RBS as registered on the Microsoft Entra.
- ◆ **Room Grouping:** Enable this function to refine the list of available rooms (shows up by tapping Suggest Room on RBS panels) by only showing rooms within a distribution group or domain.
  - ◆ **Disable:** This is the default setting. With this setting, all available rooms can be shown, disregarding their physical location or distribution group.

- ◆ **Display based on calendar server’s settings:** displays available rooms that are in the same distribution group.
- ◆ **Display based on Unizon deployment tree’s settings:** displays available rooms within the third last level (e.g. building) and groups these rooms by the locations from the second last level (e.g. floor).

For example, the image below illustrates a Unizon deployment tree, the last level being the rooms, the second last are floors, and the third last are the cities. When operating an RBS panel in Taiwan HQ to search for available rooms (using the Suggest Room function), all the available rooms in Taiwan HQ (third last level) will be listed by floor (second last level), and a drop-down list of floors will be available for users to switch.

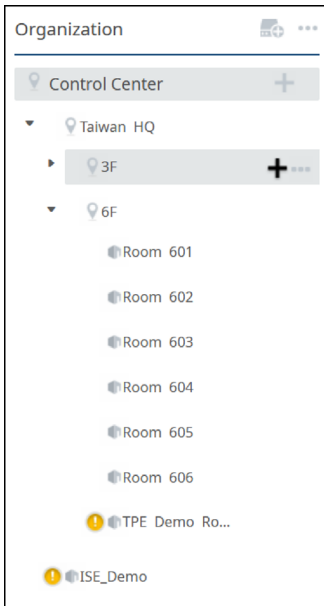

## **Configuring Room Grouping**

Enable this function to refine the list of available rooms (shows up by tapping Suggest Room on RBS panels) by only showing rooms within a distribution group or domain.

1. Select a room grouping option.
  - a) On RBS Configurator, go to **Calendar Settings > Microsoft 365**.
  - b) Select **Display based on calendar server's settings** or **Display based on Unizon deployment tree's settings**.  
For details on differences between these options, see *ATEN RBS Configurator*, page 35.
2. If you have selected **Display based on Unizon's deployment tree's settings**, go to Unizon and make sure the second and third last levels are clearly named.
3. If you have selected **Display based on calendar server's settings**, create and/or configure distribution groups using PowerShell.
  - a) Connect to **PowerShell**.
  - b) Create distribution groups and put rooms into distribution groups using the following commands.

<b>Configuration Action</b>	<b>Command</b>
To create a new distribution group	<b>New-DistributionGroup <u>ROOM LIST</u> - RoomList</b>  <b>Note:</b> "ROOM LIST" is an example name of the new distribution group.
To remove a distribution group	<b>Remove-DistributionGroup "distributiongroup"</b>  <b>Note:</b> Put the name of the distribution group in the quotation marks. "distributiongroup" is used as an example here.
To see created distribution groups	<b>Get-DistributionGroup</b>
To put rooms into a distribution group	<b>Add-DistributionGroupMember -Identity "<u>ROOM LIST</u>" -Member <u>ROOM ACCOUNT</u></b>  <b>Note:</b> The underlined parts of the command represent the name of the target distribution group and room account.

Configuration Action	Command
To see created rooms in a distribution group	<b>Get-DistributionGroupMember -Identity "<u>distributiongroup</u>"</b>  <b>Note:</b> Put the name of the distribution group in the quotation marks. "distributiongroup" is used as an example here.
To remove a room account from a distribution group	<b>Remove-DistributionGroupMember -Identity "<u>distributiongroup</u>" -Member <u>Room account</u></b>  <b>Note:</b> The underlined parts of the command represent the name of the target distribution group and room account.

---

**Note:** The calendar server may take up to 24 hours for the changes to take effect.


---

## Microsoft Exchange Server

To use **Microsoft Exchange Server** to manage ATEN room booking system, you have to create and configure Microsoft Exchange room mailboxes which are the resource mailboxes linked to meeting rooms in advance, and then complete your calendar settings on ATEN RBS Configurator.


The room mailbox configuration procedures are slightly different by Microsoft Exchange server versions. Thus, before setting up Microsoft Exchange room mailboxes, check your Exchange server version by the following steps:

1. Open **Windows PowerShell** from the Start menu.

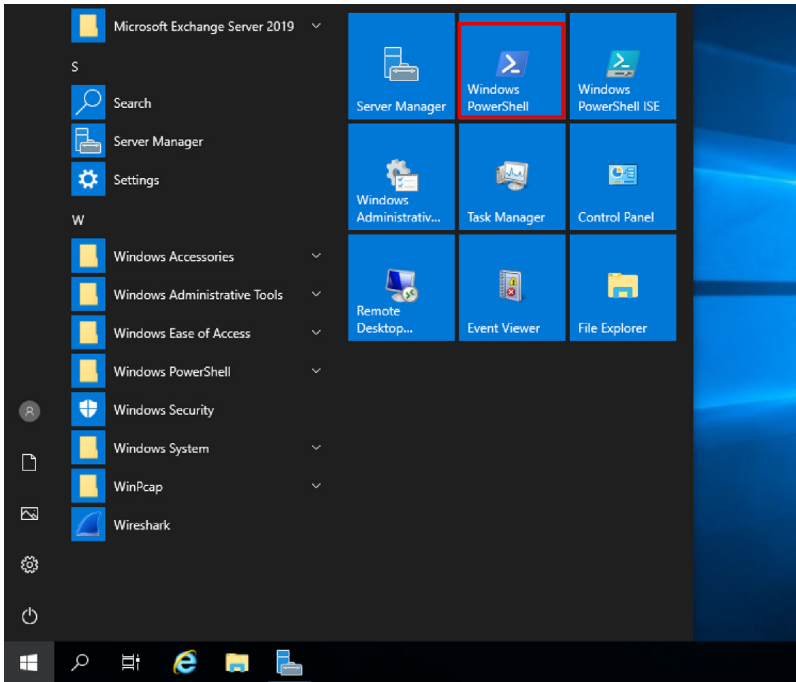

2. Input the command below to check the returned **FileVersion** number:

```
Get-Command Exsetup.exe | ForEach {$_.FileVersionInfo}
```

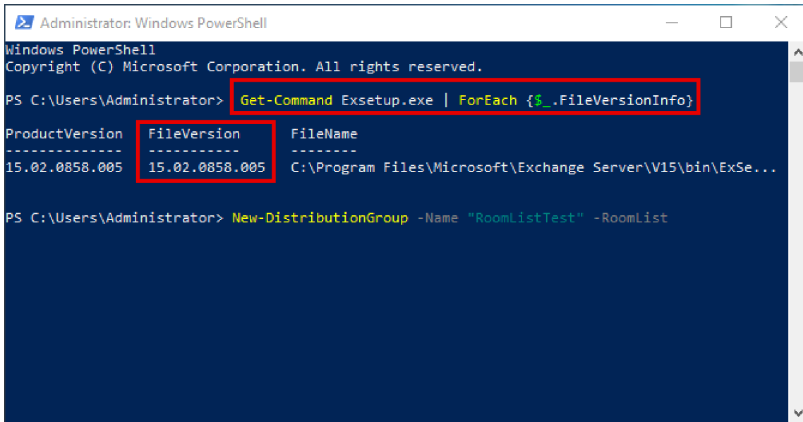

The number associated with “FileVersion” from the output (e.g. “15.02.0805.005” in the figure) is the build version of your Microsoft Exchange server. Determine which Microsoft Exchange version is installed on your computer from the table below.

Microsoft Exchange Version	Build Number
2010	14.03.xxxx.xxx
2013	15.00.xxxx.xxx
2016	15.01.xxxx.xxx
2019	15.02.xxxx.xxx


**Note:** For the setup procedures of Microsoft Exchange 2010, refer to *Microsoft Exchange 2010*, page 41; for Microsoft Exchange 2013 / 2016 / 2019, please refer to *Microsoft 2013 / 2016 / 2019*, page 56.

## Microsoft Exchange 2010


Follow the steps to set up your **Microsoft Exchange 2010** for managing your ATEN Room Booking System.

### Create a Room Mailbox


1. Launch **Exchange Management Console** from the **Start** menu > **All Programs > Microsoft Exchange Server 2010**.

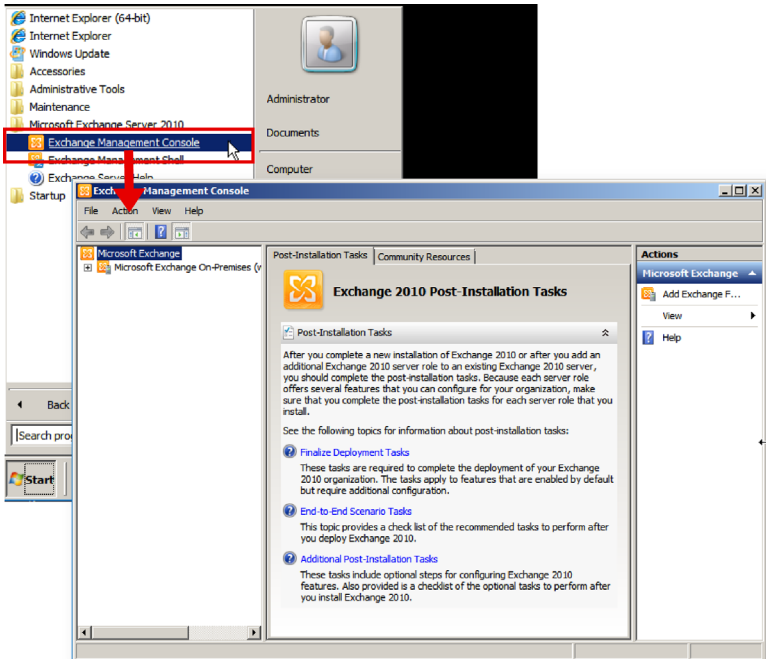

2. Navigate to **Recipient Configuration > Mailboxes**, right-click on **“Mailboxes”** to open the context menu, and select the option **“New Mailbox...”**.

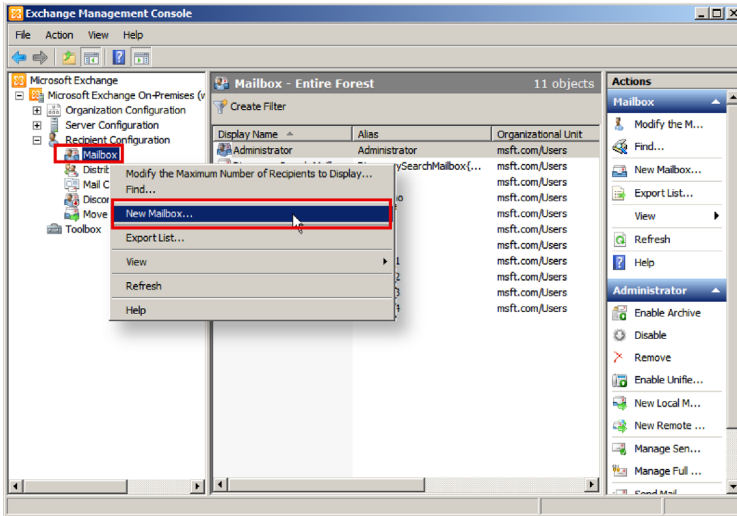


3. The "New Mailbox" wizard appears, and on the **Introduction** page, select **“Room Mailbox”** as the mailbox type to be created. Click **Next** to proceed to the **User Type** page.

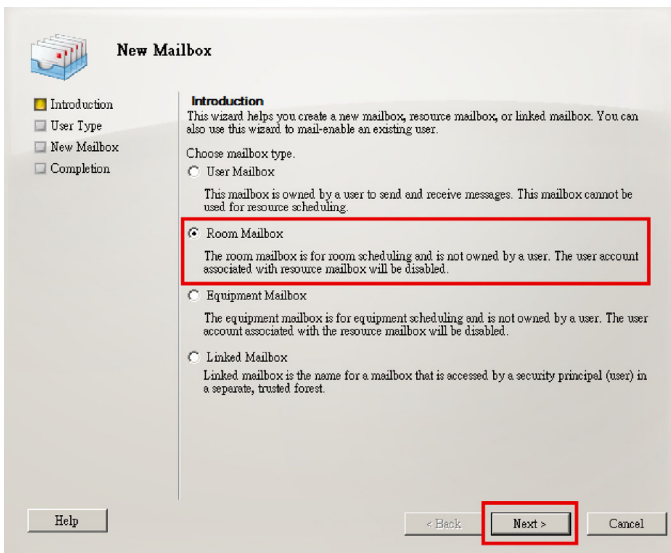



4. On the **User Type** page, click **New User** and then **Next** to fill out the required user information for the new room mailbox.

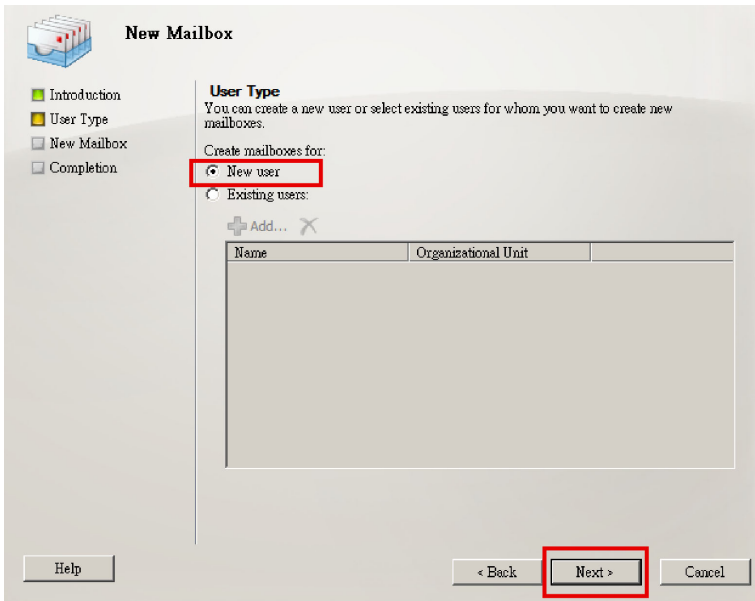

**New Mailbox**

- Introduction
- User Type
- New Mailbox
- Completion

**User Type**  
You can create a new user or select existing users for whom you want to create new mailboxes.


Create mailboxes for:

- New user
- Existing users

+ Add... X

Name	Organizational Unit
------	---------------------

Help < Back **Next >** Cancel

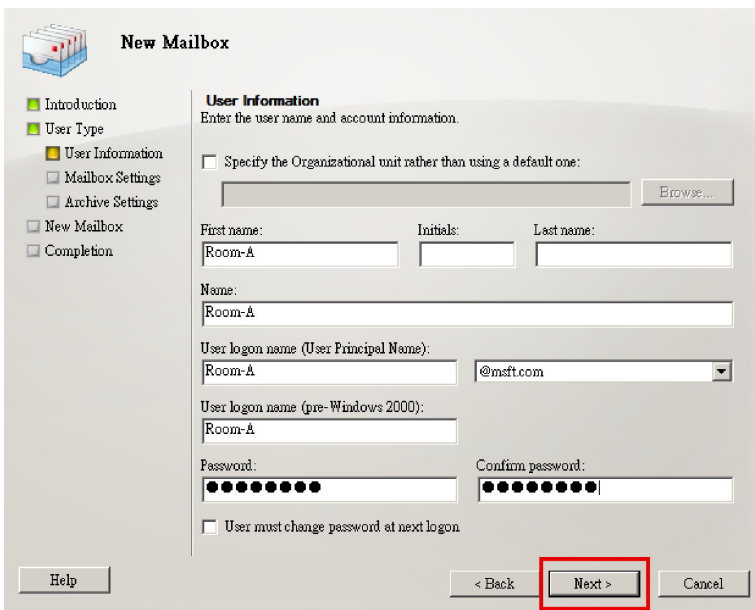

**New Mailbox**

- Introduction
- User Type
  - User Information
  - Mailbox Settings
  - Archive Settings
- New Mailbox
- Completion

**User Information**  
Enter the user name and account information.

Specify the Organizational unit rather than using a default one:  
[ ] Browse...

First name: [ Room-A ] Initials: [ ] Last name: [ ]

Name: [ Room-A ]

User logon name (User Principal Name): [ Room-A ] [ @mst.com ]

User logon name (pre-Windows 2000): [ Room-A ]

Password: [ ●●●●●●●● ] Confirm password: [ ●●●●●●●● ]

User must change password at next logon.

Help < Back **Next >** Cancel

- Enter the **Alias** on the **Mailbox Settings** tab, and complete the other optional settings on both **Mailbox Settings** tab and the **Archive Settings** tab if necessary. Click **Next** to proceed to the **New Mailbox** page.

**New Mailbox**

- Introduction
- User Type
  - User Information
  - Mailbox Settings
  - Archive Settings
- New Mailbox
- Completion

**Mailbox Settings**  
Enter the alias for the mailbox user, and then select the mailbox location and policy settings.

Alias:  
Room-A

Specify the mailbox database rather than using a database automatically selected:  
Browse...

Managed folder mailbox policy:  
Browse...

Exchange ActiveSync mailbox policy:  
Browse...

**ⓘ** Managed custom folders is a premium feature of messaging records management. Mailboxes with policies that include managed custom folders require an Exchange Enterprise Client Access License (CAL).

Help < Back **Next >** Cancel

**New Mailbox**


- Introduction
- User Type
  - User Information
  - Mailbox Settings
  - Archive Settings
- New Mailbox
- Completion

**Archive Settings**  
Use this step to link an online archive to your mailbox. Items will be moved automatically from the primary user mailbox to the archive based on the default retention policy settings or those you define.

Create an archive mailbox for this account


**ⓘ** Online archives are a premium feature and require an Exchange Enterprise Client Access License (CAL) to enable it for the mailbox.

Help < Back **Next >** Cancel

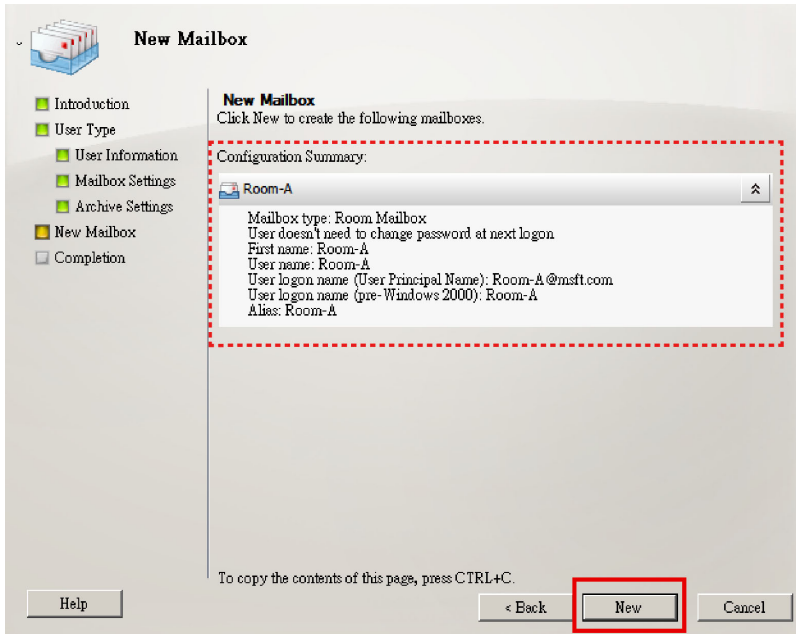6. On **New Mailbox** page, please do the followings:


- ◆ Check the room mail information displayed on **Configuration Summary**.
- ◆ Note down the information which will be used for filling in to the fields on your RBS Configurator.
- ◆ Click **New** to create this room mail after you confirm the configuration is correct.

- The **Completion** page shows the result of the setup. Click **Finish** to close the **New Mailbox** wizard.

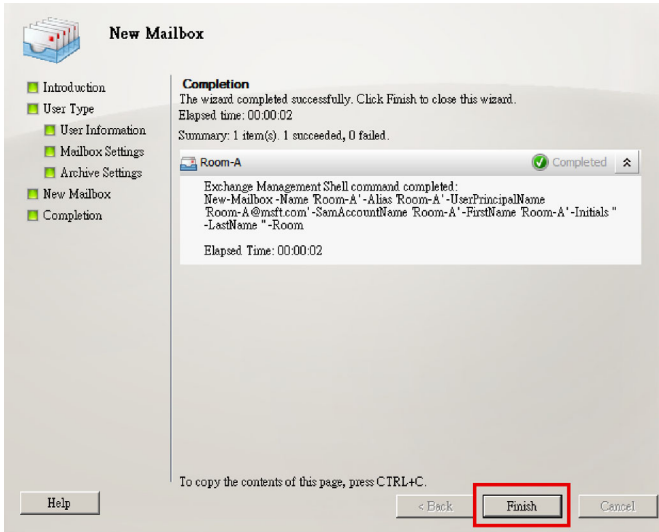


## Assign the Delegate to the Room Mailbox


- Now the newly-created room mailbox is listed on **Mailbox - Entire Forest**. Right-click on this room mailbox to open the context menu and select **Properties**.

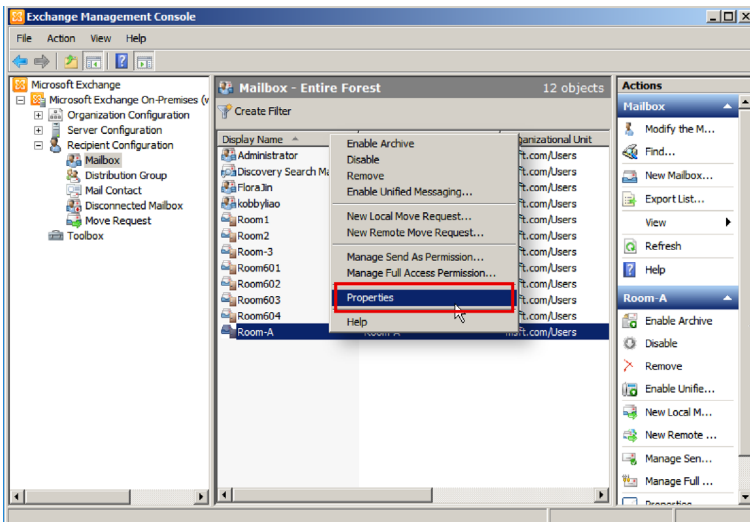

2. On the **Properties** window of this newly-created room mailbox, go to **Resource Policy** tab, and click the **Add** button under **Specify delegates of this mailbox** to add a delegate.

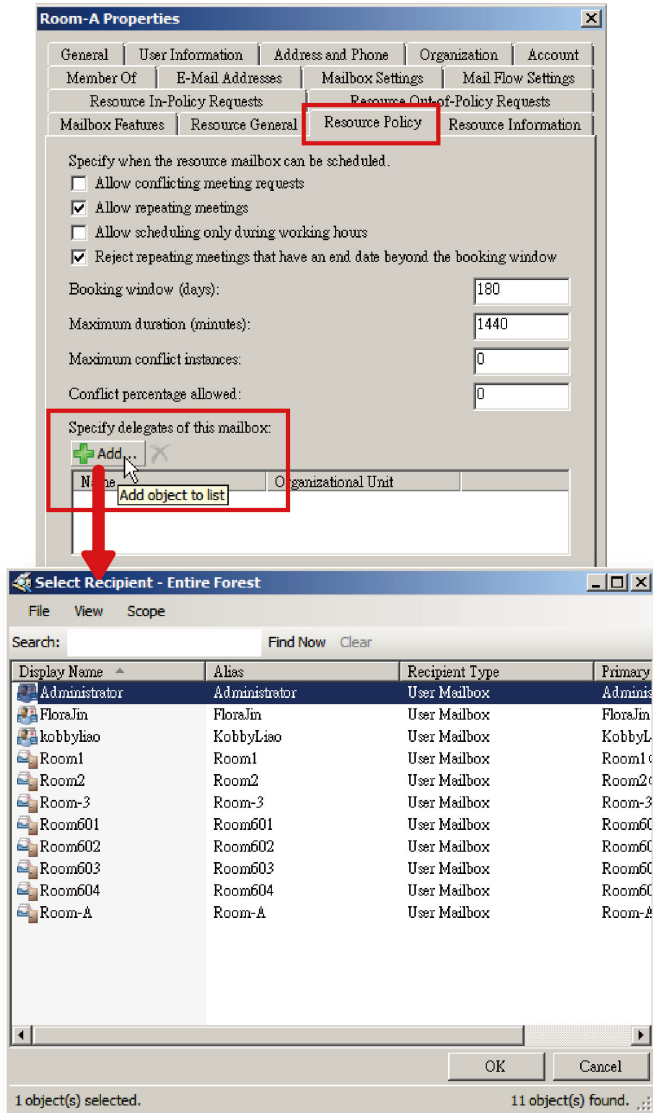


3. Select the delegate for this mailbox from the list and then click **OK**. It is suggested to set a user that is created for ATEN RBS purpose only to be the delegate.

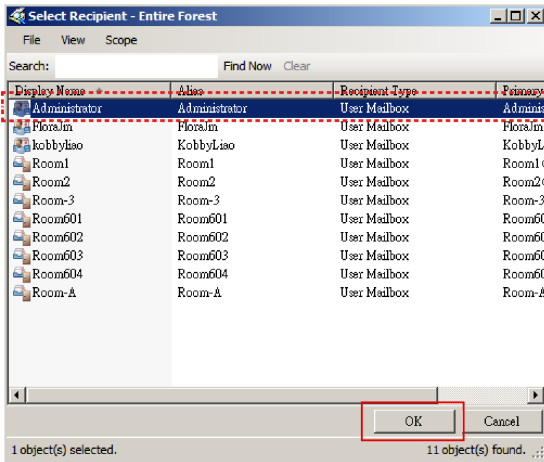


**Note:** Make sure to note down the information of the selected delegate, and use it for setting up the calendar on your ATEN RBS Configurator later on. See in the section Calendar Settings of ATEN RBS Configuration.

4. Apply your settings.

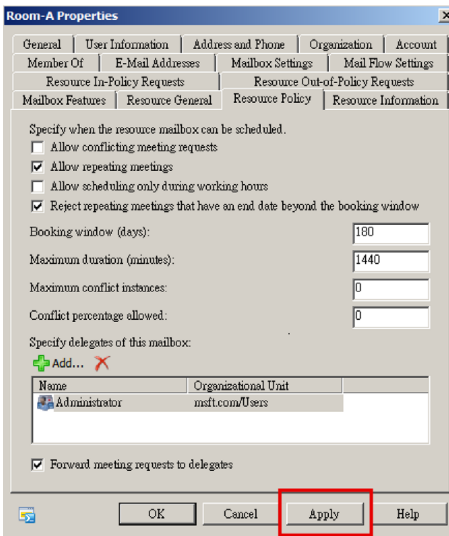


## Set up Password for the Room Mailbox


1. Go to the **Start** menu > **All Programs** > **Administrative Tools** > **Server Manager**.

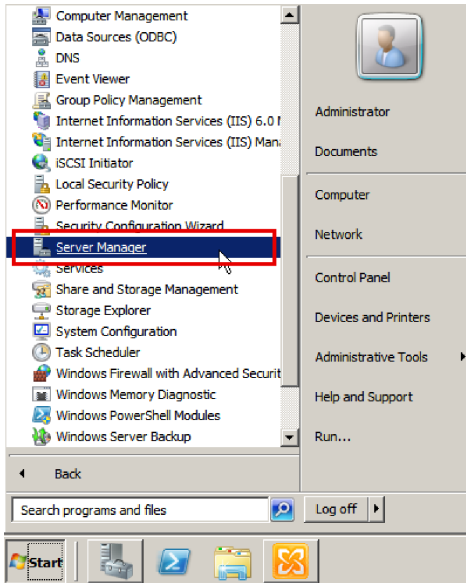


2. In **Server Manager**, navigate to **Roles** > **Active Directory Domain Services** > **Active Directory Users and Computers** > **Domain** > **Users**.

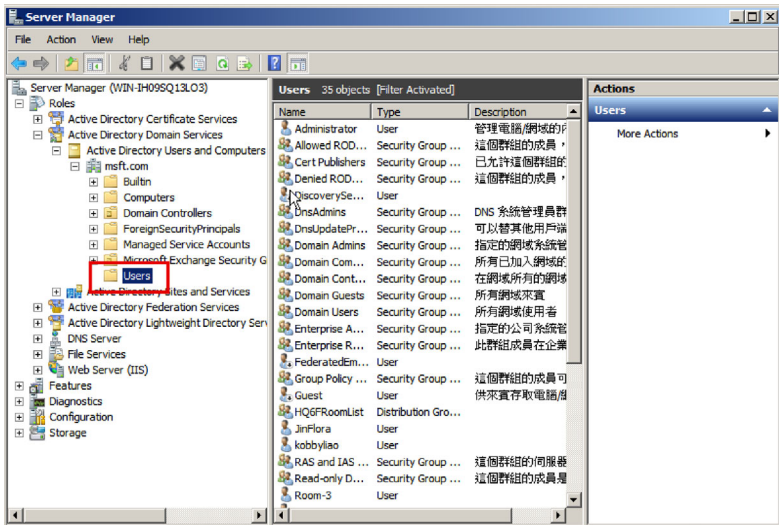

3. Scroll to find the room mailbox you just created, right-click on it to open the context menu, and select the option "**Reset Password**".

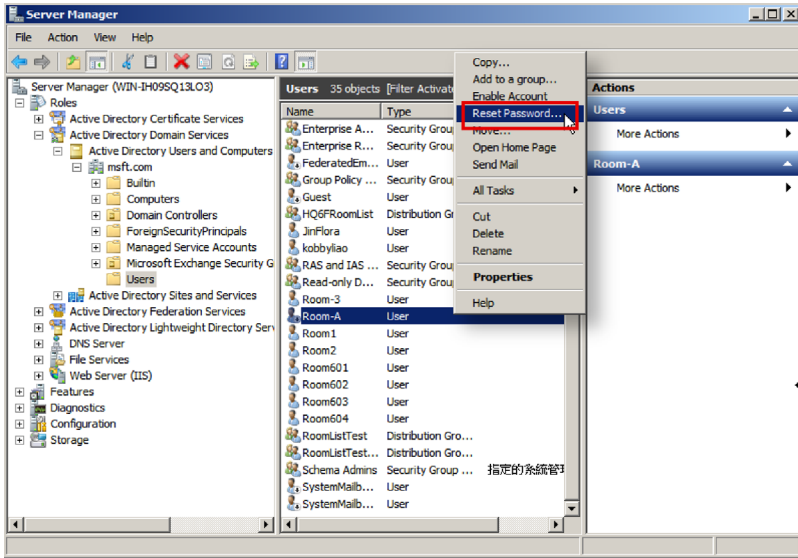


4. Enter and confirm the new password, and then click **OK** to reset it.

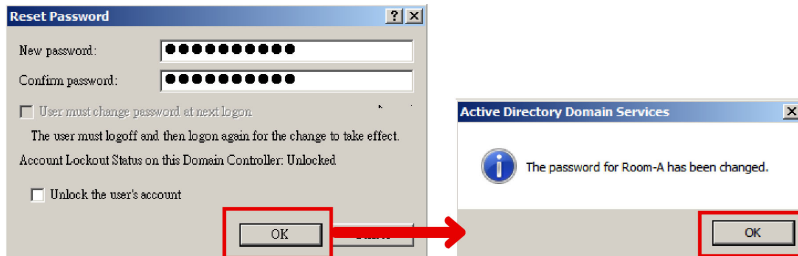

**Note:** Note down the new password that will be used for setting your ATEN RBS Configurator Panel Management. See the description about *Calendar Account*, page 86 in the section *Panel Management Options*, page 86.




- Open the context menu of this room mailbox again, and select **Enable Account**.

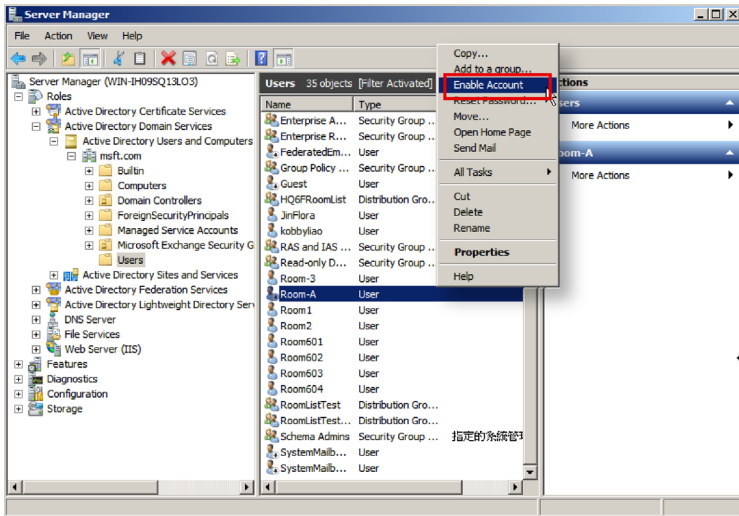

### Add the Room Mailbox to a Room List (Distribution Group)


After successfully creating and enabling the room mailbox, start to add this room mailbox to a Room List (Distribution Group) through Exchange Management Shell.

- Launch **Exchange Management Shell** from the **Start** menu > **All Programs** > **Microsoft Exchange Server 2010**.

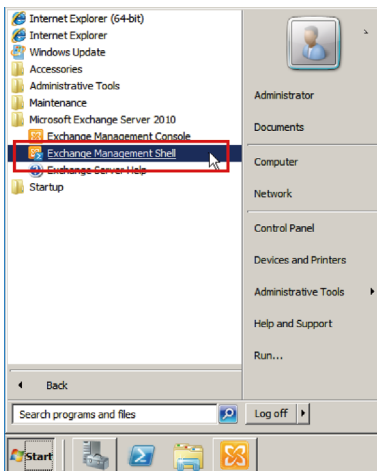

2. Run the command below to create a room list (distribution group):

```
New-DistributionGroup -Name "ROOM LIST" -RoomList
```

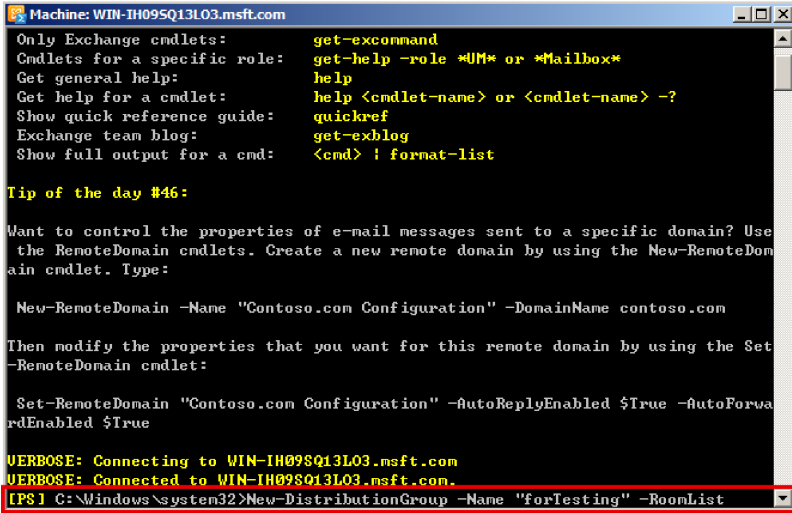

**Note:**

- ◆ **ROOM LIST** in the command is the name for the room list to be created, e.g., **forTesting** as the figure shows.
  - ◆ Room lists can also used as filters when searching for available rooms using the Suggest Room function on RBS panels, that is, only rooms within the same room list (distribution group) appear are suggested by the Room Booking System. For full setup information, see *Setting Up Room Grouping*, page 69.
-

- The room list (distribution group) is successfully created.

```

Machine: WIN-IH09SQ13L03.msft.com
Tip of the day #46:
Want to control the properties of e-mail messages sent to a specific domain? Use
the RemoteDomain cmdlets. Create a new remote domain by using the New-RemoteDom
ain cmdlet. Type:

New-RemoteDomain -Name "Contoso.com Configuration" -DomainName contoso.com

Then modify the properties that you want for this remote domain by using the Set
-RemoteDomain cmdlet:

Set-RemoteDomain "Contoso.com Configuration" -AutoReplyEnabled $True -AutoForwa
rdEnabled $True

VERBOSE: Connecting to WIN-IH09SQ13L03.msft.com
VERBOSE: Connected to WIN-IH09SQ13L03.msft.com.
[PS] C:\Windows\system32>New-DistributionGroup -Name "forTesting" -RoomList

-----
Name                DisplayName         GroupType           PrimarySMTPaddress
-----
forTesting          forTesting         Universal           forTesting@msft.com
-----

[PS] C:\Windows\system32>

```

- Use the cmdlet below to add your room mailbox to this room list:  
Add-DistributionGroupMember -Identity "ROOM LIST" -Member ROOM ACCOUNT

```

Machine: WIN-IH09SQ13L03.msft.com
Tip of the day #46:
Want to control the properties of e-mail messages sent to a specific domain? Use
the RemoteDomain cmdlets. Create a new remote domain by using the New-RemoteDom
ain cmdlet. Type:

New-RemoteDomain -Name "Contoso.com Configuration" -DomainName contoso.com

Then modify the properties that you want for this remote domain by using the Set
-RemoteDomain cmdlet:

Set-RemoteDomain "Contoso.com Configuration" -AutoReplyEnabled $True -AutoForwa
rdEnabled $True

VERBOSE: Connecting to WIN-IH09SQ13L03.msft.com
VERBOSE: Connected to WIN-IH09SQ13L03.msft.com.
[PS] C:\Windows\system32>New-DistributionGroup -Name "forTesting" -RoomList

Name                DisplayName         GroupType           PrimarySMTPaddress
-----
forTesting          forTesting         Universal           forTesting@msft.com

[PS] C:\Windows\system32>Add-DistributionGroupMember -Identity "forTesting" -Mem
ber Room-A

```

#### Note:

- ◆ **Member ROOM ACCOUNT** here indicates the name of your room mailbox to be added, e.g., **Room-A** as the figure shows.
- ◆ Repeat Step 4 to add more room mailboxes to the room list.
- ◆ Each room list can contain up to 100 rooms.

- To check whether the room mailbox(es) is successfully added to the room list, use the cmdlet below and see the returned room list member(s).

Get-DistributionGroupMember -Identity "ROOM LIST"

```

Machine: WIN-IH095Q13L03.msft.com
Then modify the properties that you want for this remote domain by using the Set-RemoteDomain cmdlet:
Set-RemoteDomain "Contoso.com Configuration" -AutoReplyEnabled $True -AutoForwardEnabled $True
VERBOSE: Connecting to WIN-IH095Q13L03.msft.com
VERBOSE: Connected to WIN-IH095Q13L03.msft.com.
[PS] C:\Windows\system32>New-DistributionGroup -Name "forTesting" -RoomList
Name                DisplayName          GroupType            PrimarySmtpAddress
----                -
forTesting           forTesting           Universal            forTesting@msft.com

[PS] C:\Windows\system32>Add-DistributionGroupMember -Identity "forTesting" -Member Room-A
[PS] C:\Windows\system32>Get-DistributionGroupMember -Identity "forTesting"
Name                RecipientType
----                -
Room-A              UserMailbox

[PS] C:\Windows\system32>
    
```

- Give the full permission of the rooms to your delegate by using the cmdlet: Add-MailboxPermission -accessRights FullAccess -Identity ROOM NAME -User DELEGATE

```

Machine: WIN-IH095Q13L03.msft.com
[PS] C:\Windows\system32>New-DistributionGroup -Name "forTesting" -RoomList
Name                DisplayName          GroupType            PrimarySmtpAddress
----                -
forTesting           forTesting           Universal            forTesting@msft.com

[PS] C:\Windows\system32>Add-DistributionGroupMember -Identity "forTesting" -Member Room-A
[PS] C:\Windows\system32>Get-DistributionGroupMember -Identity "forTesting"
Name                RecipientType
----                -
Room-A              UserMailbox

[PS] C:\Windows\system32>Add-MailboxPermission -accessRights FullAccess -Identity Room-A -User Administrator
Identity            User                AccessRights         IsInherited Deny
-----            -
msft.com/Users/Ro... MSFT\Administrator <FullAccess>        False        False

[PS] C:\Windows\system32>
    
```

**Note:** ROOM NAME in this cmdlet indicates the name of your room mailbox whereas DELEGATE here means the delegate you assigned when creating the aforementioned room mailbox. Refer to Step 3 in the section of *Assign the Delegate to the Room Mailbox*, page 46.

## Setting Up Room Grouping

Enable this function to refine the list of available rooms (shows up by tapping Suggest Room on RBS panels) by only showing rooms within a distribution group or domain.

1. Select a room grouping option.
  - a) On RBS Configurator, go to **Calendar Settings > Exchange**.
  - b) Select **Display based on calendar server's settings** or **Display based on Unizon deployment tree's settings**.

For details on differences between these options, see *Calendar Settings in ATEN RBS Configurator*, page 65.

2. If you have selected **Display based on Unizon's deployment tree's settings**, go to Unizon and make sure the second and third last levels are clearly named.
3. If you have selected **Display based on calendar server's settings**, no further configuration is required.

To change the current distribution list and room groupings, see *Add the Room Mailbox to a Room List (Distribution Group)*, page 51.

## **Microsoft 2013 / 2016 / 2019**

### **Exchange Admin Center (EAC)**

For Microsoft Exchange 2013 / 2016 / 2019, you can manage your Exchange in the web-based management console, **Exchange Admin Center (EAC)**. Use the URLs to access your EAC:


*https://<IP address of your Exchange server>/ecp*

or


*https://<host name of your Exchange server>/ecp*

The <IP address of your Exchange server> or <host name of your Exchange server> in the URL is the part you need to configure.

1. To find your server IP address:
  - a) Run the **Windows PowerShell** as administrator from the **Start** menu.

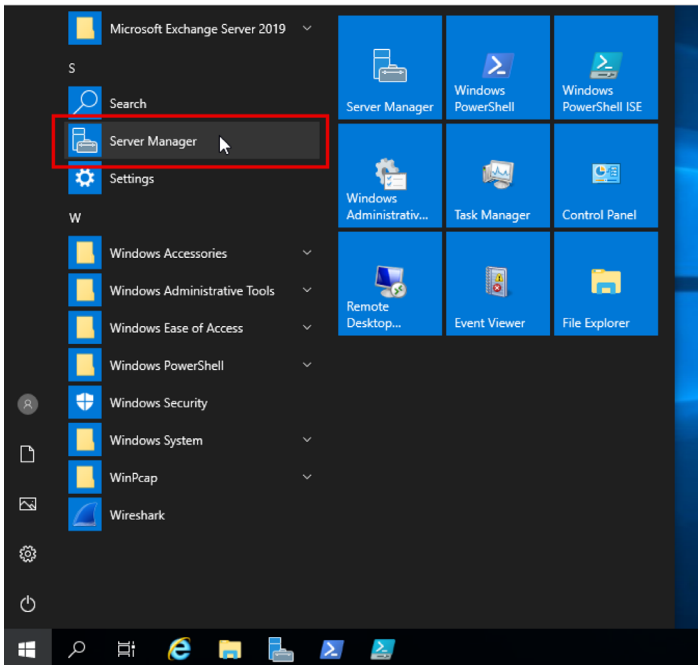

b) Input the cmdlet: `ipconfig` to check the output IPv4 address.

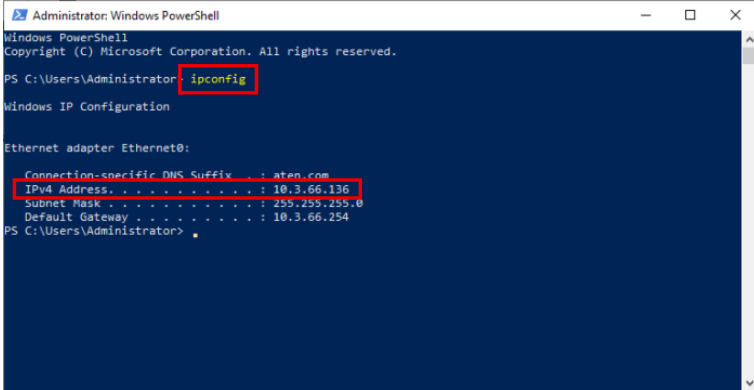

```

Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

PS C:\Users\Administrator> ipconfig

Windows IP Configuration


Ethernet adapter Ethernet0:

    Connection-specific DNS Suffix . . . : atn.com
    IPv4 Address. . . . . : 10.3.66.136
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 10.3.66.254
PS C:\Users\Administrator>
  
```

c) As the example in the figure shows, the IPv4 address is `10.3.66.136`, which means the configured URL for accessing the EAC will be `https://10.3.66.136/ecp`.

2. If you'd like to use `https://<host name of your Exchange server>/ecp` to access your EAC:

a) Check the host name of your Exchange server from **Server Manager > Local > PROPERTIES > Computer name**.

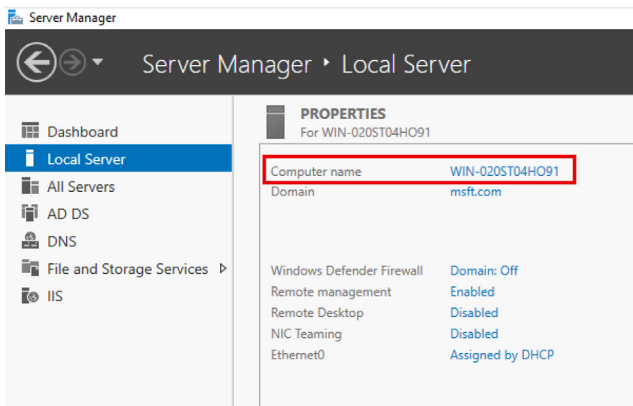


b) As the example figure indicated, the Computer name is `WIN-020ST04HO91`, and the URL for the EAC will be `https://WIN-020ST04HO91/ecp`.


## Create a Room Mailbox

To start:

1. Access your **Exchange Admin Center (EAC)** through your own URL, and log in with your admin account and password.

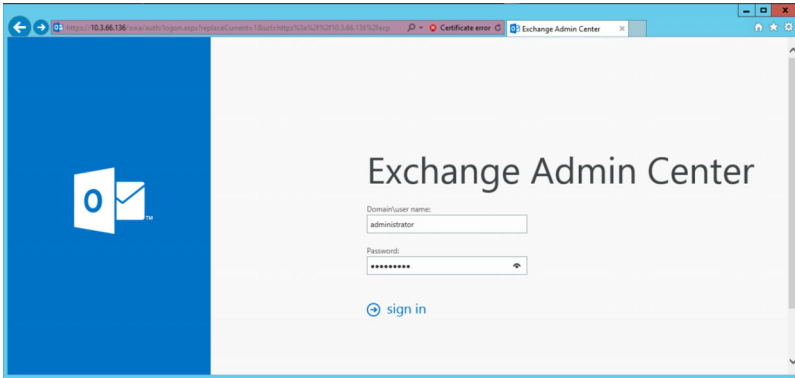


2. Navigate to **Recipients > Resources**, and click on the add button to open the context menu to select **Room mailbox**.

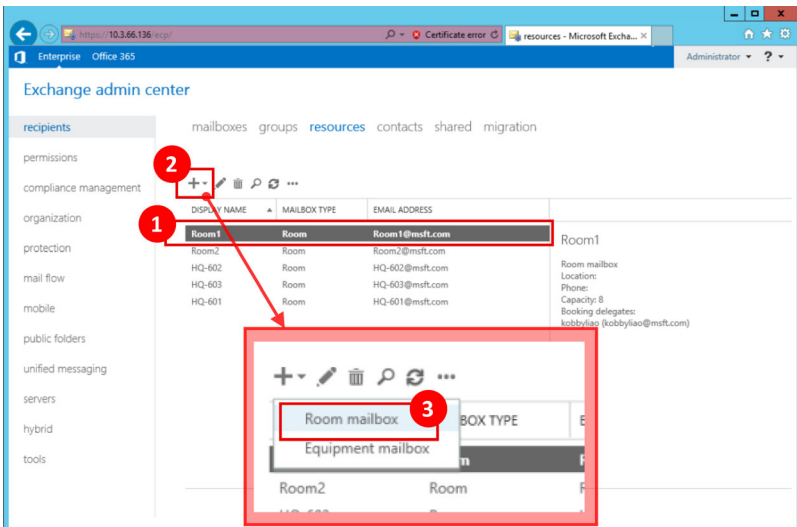



3. On the new room mailbox window, fill in the required information, **Room name** and **Alias**, and click the save button to create the new room mailbox.

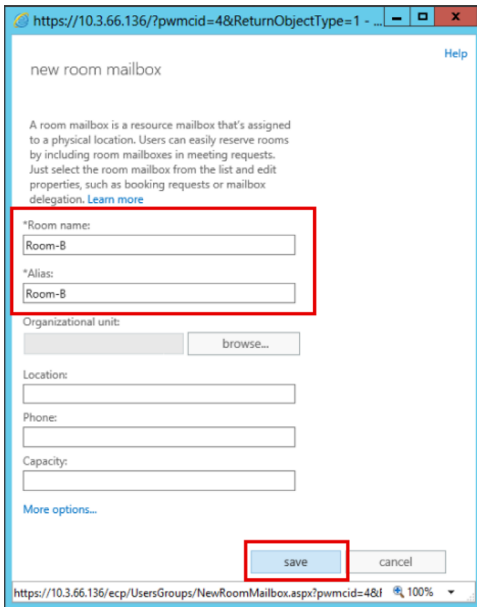

https://10.3.66.136/?pwmcid=4&ReturnObjectType=1 - ...

new room mailbox Help

A room mailbox is a resource mailbox that's assigned to a physical location. Users can easily reserve rooms by including room mailboxes in meeting requests. Just select the room mailbox from the list and edit properties, such as booking requests or mailbox delegation. [Learn more](#)

\*Room name:

\*Alias:

Organizational unit:

Location:


Phone:

Capacity:

[More options...](#)


https://10.3.66.136/ecp/UsersGroups/NewRoomMailbox.aspx?pwmcid=4&f 100%

4. Launch **Active Directory Administrative Center (ADAC)** from the **Start menu > Administrative Tools**.

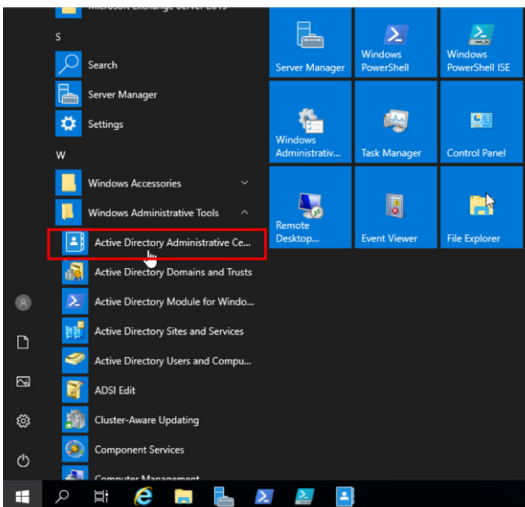


**Note:** The appearance of the Start menu and the path to ADAC are different with each Windows version.

- In ADAC, click to enter **Users** tab and scroll to find the room mailbox you just created. Click the name of this room mailbox and select **Reset password** in the **Tasks** pane.

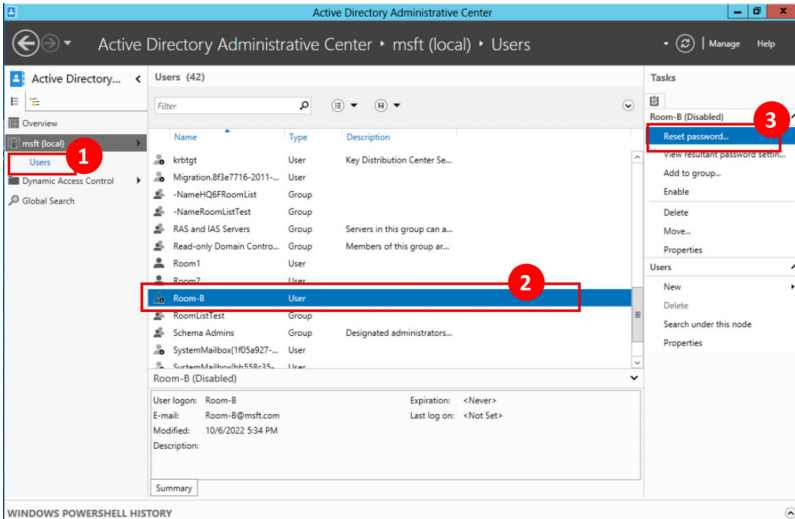


- The pop-up window “**Reset Password**” shows up. Enter and confirm the password to reset it.

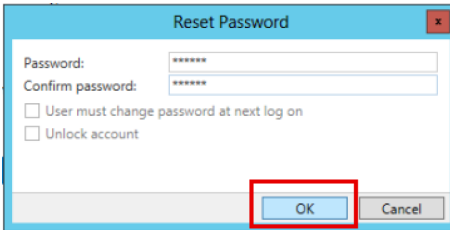


**Note:** Note down the new password that will be used for setting your ATEN RBS Configurator Panel Management. See the description about *Calendar Account*, page 86 in the section *Panel Management Options*, page 86.

## 7. In the **Tasks** pane of the room mailbox, click **Enable**.

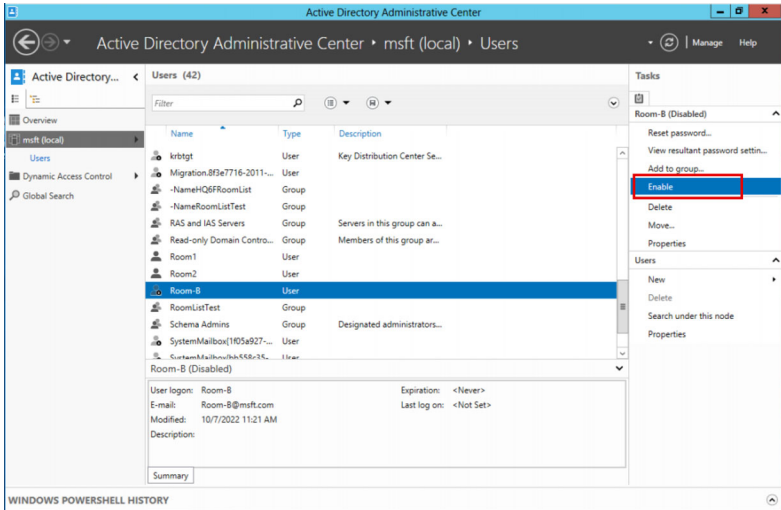


## Set the Delegate for the Room Mailbox

1. Return back to EAC and go to **recipients** > **resources**. Doubleclick on the room mailbox to set the delegates for accepting or declining the room booking requests.

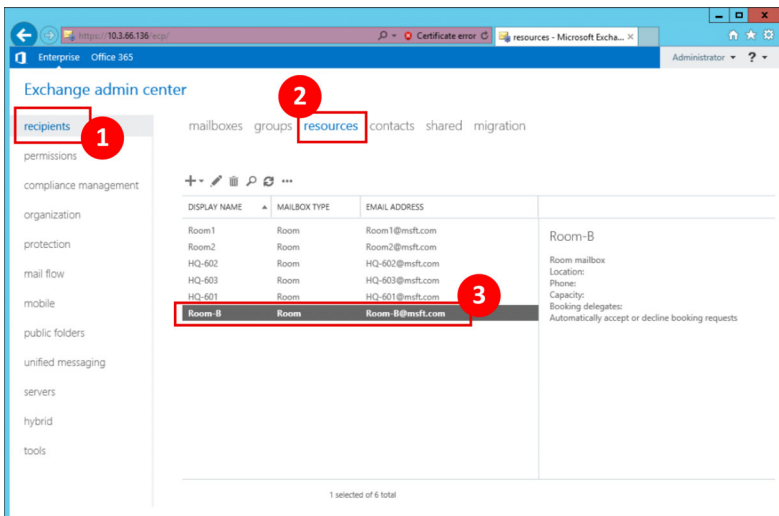


2. In the pop-up, click the delegate to be added and then click the add button. Finish your configuration by clicking the ok button.

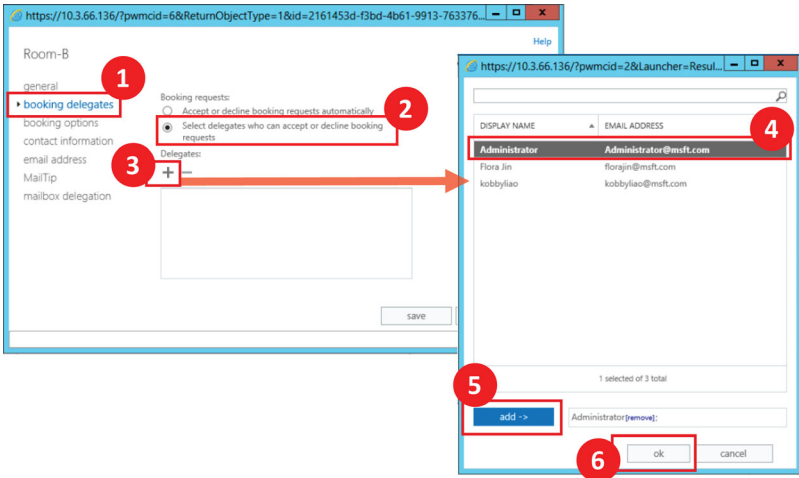

## Add the Room Mailbox to a Room List (Distribution Group)

1. Launch the **Exchange Management Shell** from the **Start** menu.

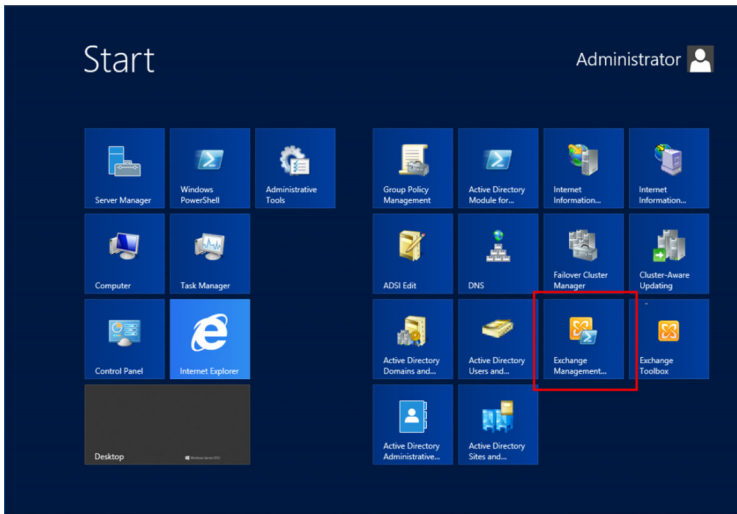

**Note:** The appearance of the Start menu is different with each Windows version.

- Use the cmdlet below to create a new room list (distribution group):  
`New-DistributionGroup -Name "ROOM LIST" -RoomList`

```

Machine: WIN-TD782R99L44.msft.com

Welcome to the Exchange Management Shell!

Full list of cmdlets: Get-Command
Only Exchange cmdlets: Get-ExCommand
Cmdlets that match a specific string: Help <String>*
Get general help: Help
Get help for a cmdlet: Help <cmdlet name> or <cmdlet name> -?
Exchange team blog: Get-ExBlog
Show full output for a command: <command> | Format-List

Show quick reference guide: QuickRef
Tip of the day #77:
Did you know that you need to use the AssembleMessage script when exporting messages from a queue? For example, if you want to export the message with message ID 1234 from the contoso.com queue on server Mailbox1, you need to run the following command:
Export-Message -Identity Mailbox1\contoso.com\1234 | AssembleMessage -Path "C:\ExportedMessages\Message1234.eml"

VERBOSITY: Connecting to WIN-TD782R99L44.msft.com.
VERBOSITY: Connected to WIN-TD782R99L44.msft.com.
[PS] C:\Windows\system32>New-DistributionGroup -Name "TestingList" -RoomList

```

### Note:

- Room List in the cmdlet indicates the name for the room list you are going to create. Please configure your own room list name.
- Room lists can also be used as filters when searching for available rooms using the Suggest Room function on RBS panels, that is, only rooms within the same room list (distribution group) appear are suggested by the Room Booking System. For full setup information, see *Setting Up Room Grouping*, page 69.

- Enter the cmdlet below to add the room mailbox into the room list:  
`Add-DistributionGroupMember -Identity "ROOM LIST" -Member ROOM ACCOUNT`

```

Machine: WIN-TD782R99L44.msft.com

Welcome to the Exchange Management Shell!

Full list of cmdlets: Get-Command
Only Exchange cmdlets: Get-ExCommand
Cmdlets that match a specific string: Help <String>*
Get general help: Help
Get help for a cmdlet: Help <cmdlet name> or <cmdlet name> -?
Exchange team blog: Get-ExBlog
Show full output for a command: <command> | Format-List

Show quick reference guide: QuickRef
Tip of the day #77:
Did you know that you need to use the AssembleMessage script when exporting messages from a queue? For example, if you want to export the message with message ID 1234 from the contoso.com queue on server Mailbox1, you need to run the following command:
Export-Message -Identity Mailbox1\contoso.com\1234 | AssembleMessage -Path "C:\ExportedMessages\Message1234.eml"

VERBOSITY: Connecting to WIN-TD782R99L44.msft.com.
VERBOSITY: Connected to WIN-TD782R99L44.msft.com.
[PS] C:\Windows\system32>New-DistributionGroup -Name "TestingList" -RoomList

Name                DisplayName          GroupType            PrimarySMTPAddress
-----                -
TestingList          TestingList          Universal            TestingList@msft.com

[PS] C:\Windows\system32>Add-DistributionGroupMember -Identity "TestingList" -Member Room-1


```

**Note:**

- ◆ **ROOM LIST** in the cmdlet indicates the name of your room list, and **ROOM ACCOUNT** means the room mailbox to be added to the aforementioned room list.
  - ◆ Repeat this step to add more room mailboxes into the room list.
  - ◆ Each room list can contain up to 100 rooms.
- 

4. To check which room mailbox(es) is in the room list, enter the cmdlet below to get the output list:

```
Get-DistributionGroupMember -Identity "ROOM LIST"
```

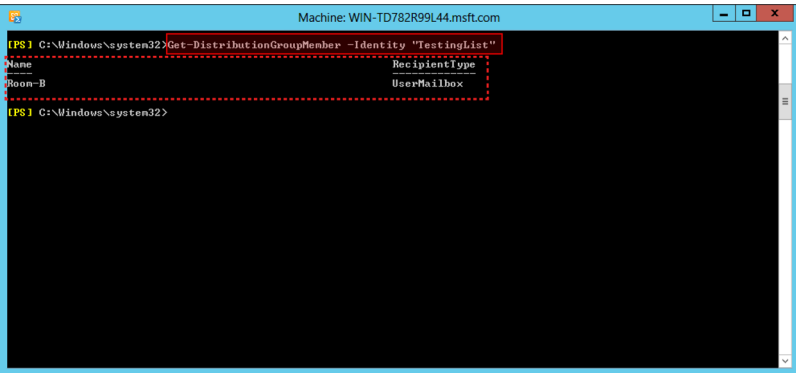

---

**Note:** **ROOM LIST** in the cmdlet indicates the name of the room list you are going to check.

---

## Calendar Settings in ATEN RBS Configurator


Once the room mailbox(es) is successfully created and configured, launch your RBS Configurator and go to **Calendar Settings** > **Exchange** to complete the following settings:

The screenshot shows the 'Calendar Settings' section of the ATEN RBS Configurator. On the left, a sidebar lists options: 'Calendar' (expanded), 'Microsoft 365', 'Google Workspace', 'Exchange' (selected), 'Room Booking System' (expanded), and 'Panel Message'. The main content area is titled 'Exchange' and includes the instruction 'Specify the delegated account you created for the resource rooms.' Below this are four input fields: 'Host Name', 'Delegate Account', 'Delegate Password', and 'Domain'.

- ◆ **Host Name:** Enter the Full Computer Name or Computer Name of your Exchange server. Check the computer name shown on **Server Manager**.
- ◆ **Delegate Account:** Enter the delegate account you designate. For Microsoft Exchange 2010, see *Assign the Delegate to the Room Mailbox*, page 46; for Microsoft Exchange 2013 / 2016 / 2019, please refer to *Set the Delegate for the Room Mailbox*, page 61.
- ◆ **Delegate Password:** Enter the password of your delegate account.
- ◆ **Domain:** Enter the Domain which can be checked in **Server Manager**.
- ◆ **Room Grouping:** Enable this function to refine the list of available rooms (shows up by tapping Suggest Room on RBS panels) by only showing rooms within a distribution group or domain.
  - ◆ **Disable:** This is the default setting.
  - ◆ **Display based on calendar server's settings:** displays available rooms that are in the same distribution group.
  - ◆ **Display based on Unizon deployment tree's settings:** displays available rooms within the third last level and groups these rooms by the locations from the second last level.


For example, the image below illustrates a Unizon deployment tree, the last level being the rooms, the second last are floors, and the third last

are the cities. When operating an RBS panel in Taiwan HQ to search for available rooms (using the Suggest Room function), all the available rooms in Taiwan HQ (third last level) will be listed by floor (second last level), and a drop-down list of floors will be available for users to switch.

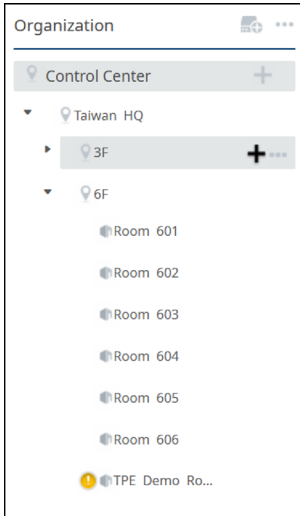


## Checking the Host Name and Domain

1. To check the Host name and Domain of your Microsoft Exchange 2010:
  - a) Launch **Server Manager** from the **Start** menu > **All Programs** > **Administrative Tool**.

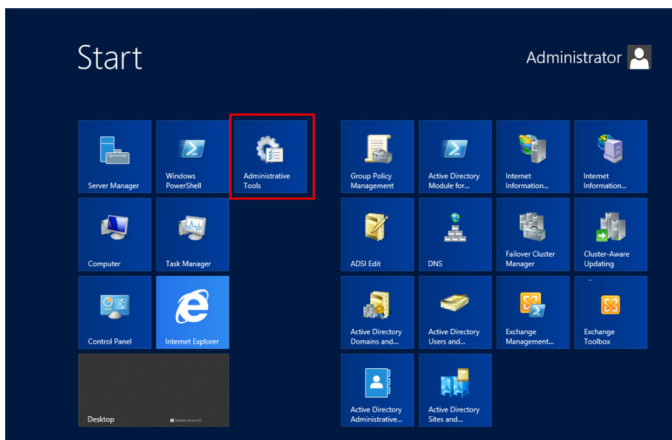




- b) Click on **Server Manager** in the tree pane, and check **Server Summary > Computer Information**.

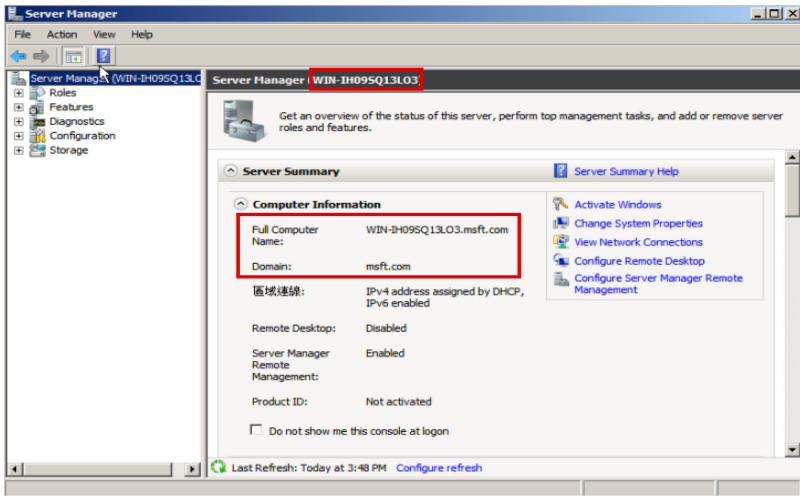


- ◆ As the example figure shows, the heading of the **Server Manager** is Server Manager (WIN-IH09SQ13L03). The part inside the brackets is the host name to be filled in the Host Name field in RBS Configurator.
- ◆ You can also find out the host name in the **Full Computer Name** field. In the example figure, the full computer name "WIN-IH09SQ13L03.msft.com" reflects the host name ends with a dot and the domain.
- ◆ Domain is just as what the Domain field shows.

2. To find the host name of your Microsoft Exchange 2013 / 2016 / 2019:

a) Launch **Server Manager** from the **Start** menu.

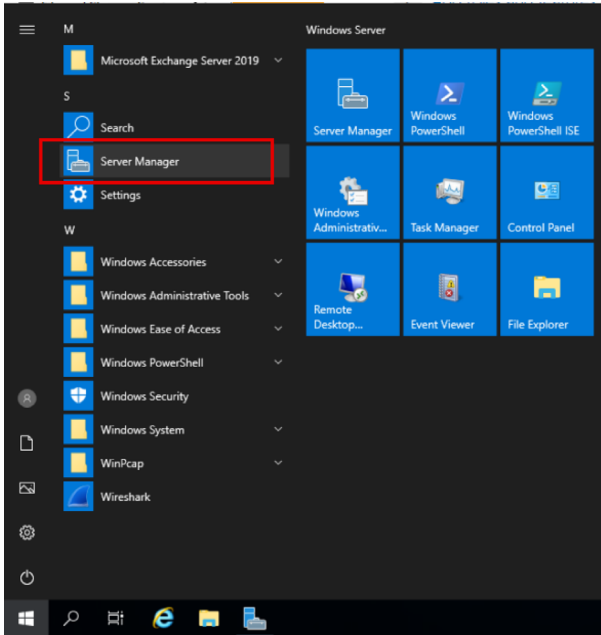

b) On **Server Manager**, go to **Local Server > PROPERTIES**.

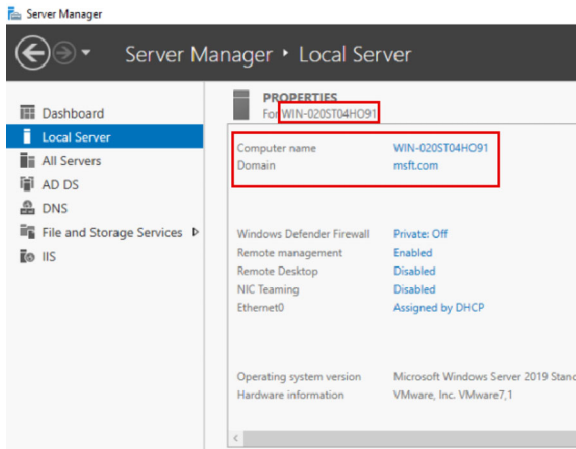

- ◆ The **Computer Name** field shows the host name.
- ◆ The **Domain** field shows the domain.

## Setting Up Room Grouping

Enable this function to refine the list of available rooms (shows up by tapping Suggest Room on RBS panels) by only showing rooms within a distribution group or domain.

1. Select a room grouping option.
  - a) On RBS Configurator, go to **Calendar Settings > Exchange**.
  - b) Select **Display based on calendar server's settings** or **Display based on Unizon deployment tree's settings**.

For details on differences between these options, see *Calendar Settings in ATEN RBS Configurator*, page 65.

2. If you have selected **Display based on Unizon's deployment tree's settings**, go to Unizon and make sure the second and third last levels are clearly named.
3. If you have selected **Display based on calendar server's settings**, no further configuration is required.

To change the current distribution list and room groupings, see *Add the Room Mailbox to a Room List (Distribution Group)*, page 62.


## Google Workspace

This section provides guidance on setting up Google Workspace for managing rooms via the ATEN room booking system.


### Note:

The information and illustrations in this section are prone to change by the service provider, Google. For full and up-to-date information on Google Workspace, visit the corresponding online help for assistance.

### Google Workspace Admin Help

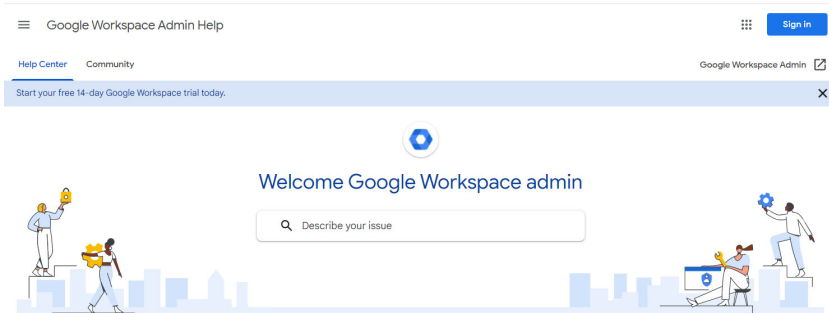

### Google Cloud Platform Help

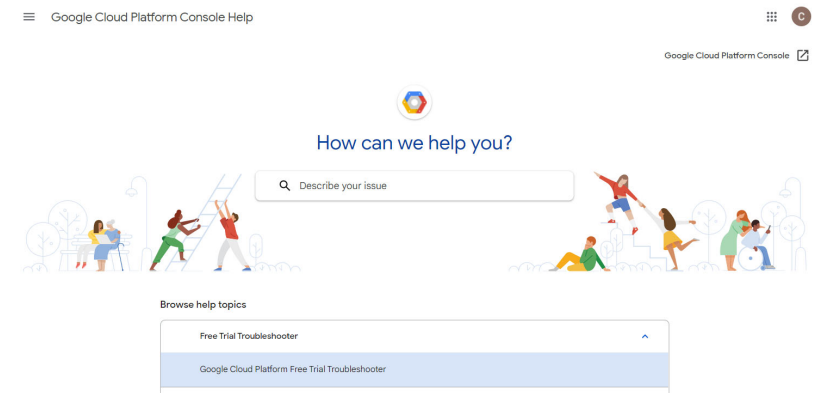


## Setting Up Google Workspace for Room Management

1. Configure Google Workspace and the Cloud console.
  - a) On Google Admin console, add rooms and buildings you wish to manage via ATEN room booking system.  
For a details, see *Adding Rooms, Buildings, and Users*, page 73.
  - b) Enable Google Calendar API and Admin API.  
For details, see *Enabling Google Calendar and Admin API*, page 77.
  - c) Create a service account.  
For details, see *Creating a Service Account*, page 79.
  - d) Allow access from third-party applications.  
For details, see *Authorizing Access from Third-party Applications*, page 80.
2. Configure the RBS project via RBS Configurator.
  - a) In RBS Configurator, go to **Calendar Settings > Calendar > Google Workspace**.
  - b) Configure the following fields.
    - ◆ **Domain:** type the domain of your admin account.
    - ◆ **Admin Account:** type the admin account (email address) of Google Workspace.
    - ◆ **Project Name:** type the project name you saved from the previous step.
    - ◆ **Service Account:** type the project name you saved from the previous step.
    - ◆ **Room Grouping:** enable this function to refine the list of available rooms (shows up by tapping Suggest Room on RBS panels) by only showing rooms in the same location.
      - **Disable:** This is the default setting.
      - **Display based on calendar server's settings:** displays available rooms that are in the same building and groups these rooms by floor.
      - **Display based on Unizon deployment tree's settings:** displays available rooms within the third last level and groups these rooms by the locations from the second last level.

For example, the image below illustrates a Unizon deployment tree, the last level being the rooms, the second last are floors, and the third


last are the cities. When operating an RBS panel in Taiwan HQ to search for available rooms (using the Suggest Room function), all the available rooms in Taiwan HQ (third last level) will be listed by floor (second last level), and a drop-down list of floors will be available for users to switch.

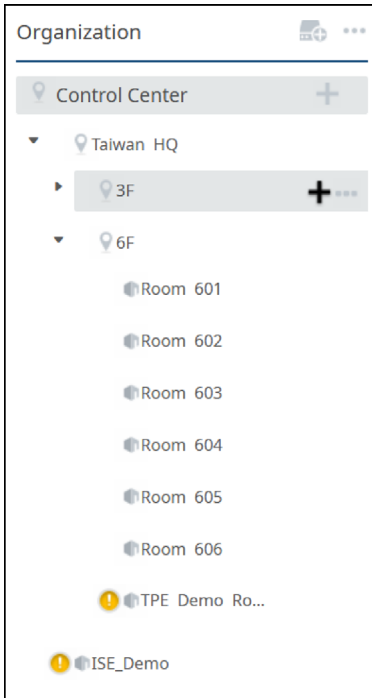


- ◆ **Certification File:** upload the certification file you generated for the service account.
- 3. Upload the project file to RBS panels to apply the setup.  
For details, see *Uploading Profiles and Setting Changes to ATEN RBS Panels*, page 87.

## Adding Rooms, Buildings, and Users

1. Sign in to Google Admin console via [admin.google.com](https://admin.google.com)

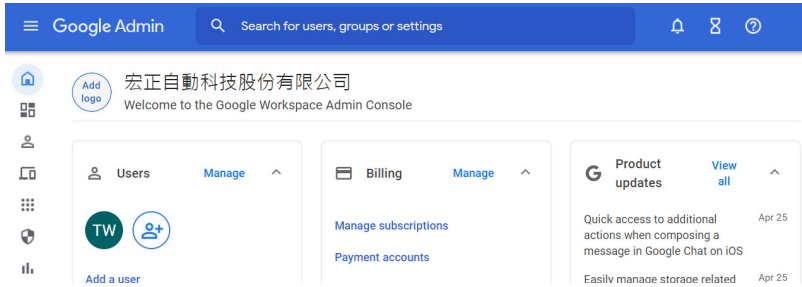


2. (Optional) Add accounts for people who will need to sign in to use Google Workspace services or configure its settings.
3. Add buildings.
  - a) Mouse over to the left to expand the toolbar, and then go to **Directory > Buildings and resources > Manage resources > Manage Buildings**.

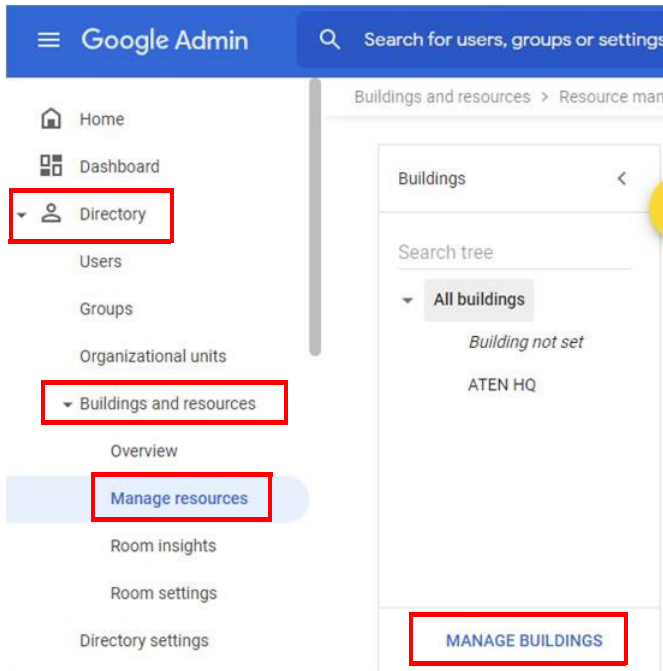

- b) Click + to add buildings.

**Note:** It is important to create buildings because buildings are used as a search filter when searching for available rooms on RBS panels using the Suggest Room function.

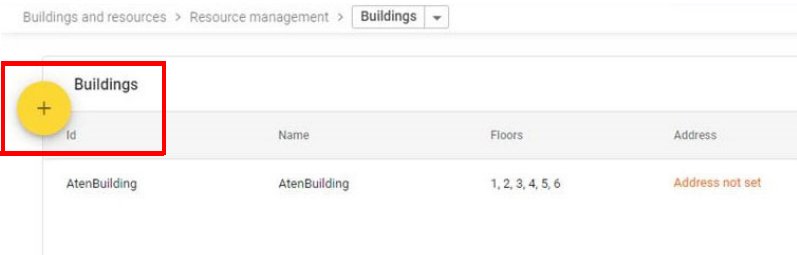

c) In the pop-up dialog, enter the required information.

**Note:** Since floor names are used as search filters when searching for available rooms on RBS panels using the Suggest Room function, be sure to use names that are easy to understand.

**Edit building**

Id \*  
 ATEN-HQ

Name \*  
 ATEN HQ

Description

Floors \*  
 3F, 4F, 5F, 6F


Address  
 No No, No. 125大同路二段智慧里, 汐止區, 新北市, 221, Taiwan

CANCEL    UPDATE BUILDING



## 4. Add rooms.

a) From the drop-down list, select **Resources**, and then click +.

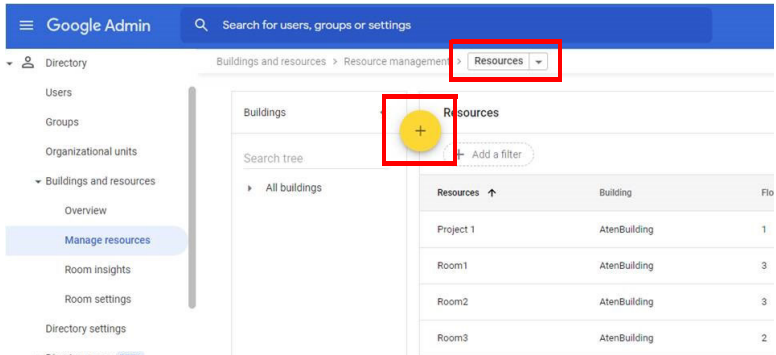


b) In the pop-up dialog box, select **Meeting space** for Category, the correct floor for the resource, and fill in other information as needed.

The 'Add resource' dialog box is shown. The 'Category' dropdown is highlighted with a red box and set to 'Meeting space (room, phone booth,...)'. The 'Type' is 'Room Booking System'. Other fields are filled as follows:

- Auto-generated resource name: Test-3-301-Room 301 (5)
- Building: Test
- Floor: 3
- Floor section: 301
- Resource name: Room 301
- Capacity: 5

Buttons at the bottom right are 'CANCEL' and 'ADD RESOURCE'.

c) Click **Add Resource**. The room added to the Resources list.

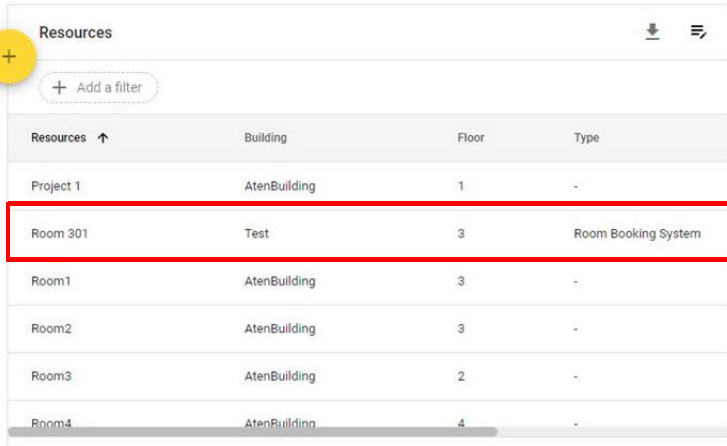

The screenshot shows a table titled "Resources" with a yellow plus sign in a circle on the left. Below the title is a search bar labeled "Add a filter". The table has four columns: "Resources", "Building", "Floor", and "Type". The row "Room 301" is highlighted with a red border.

Resources ↑	Building	Floor	Type
Project 1	AtenBuilding	1	-
Room 301	Test	3	Room Booking System
Room1	AtenBuilding	3	-
Room2	AtenBuilding	3	-
Room3	AtenBuilding	2	-
Room4	AtenBuilding	4	-

5. Save the resource email of each added meeting space.

a) Go to the Resources list and click an added meeting space.


b) Copy and paste the resource email to a notepad to be used in RBS Configurator.

## Enabling Google Calendar and Admin API

1. Sign in to Google Cloud console using administrator credentials.
2. Create a new project.
  - a) If you have pre-existing projects, click the **Select from** drop-down list, select an organization and click **NEW PROJECT**.



- b) If no project has not been created, go to **Organization Policies**, and then click **Add Project**.

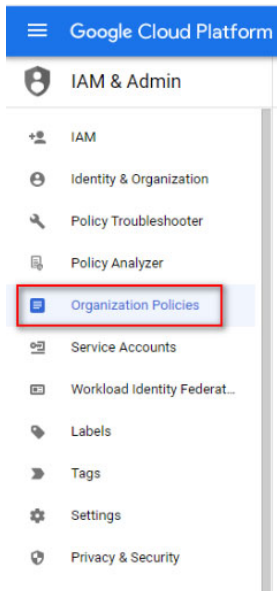

c) Configure the project details.

Project name \*  
CalendarTestv2

Project ID: utopian-bonito-301402. After the project ID is set, it cannot be changed.  
[EDIT](#)

mechanism \*  
gtest.aten.com.tw

Please select an organization to link to the project. Remind you that once the organization is selected, it cannot be changed.

position \*  
gtest.aten.com.tw [BROWSE](#)


Parent organization or folder

[SFT UP](#) [CANCEL](#)

d) Copy and paste the project name to a notepad for later use in the RBS Configurator.

3. Add the required APIs.

a) Select an organization and a project.

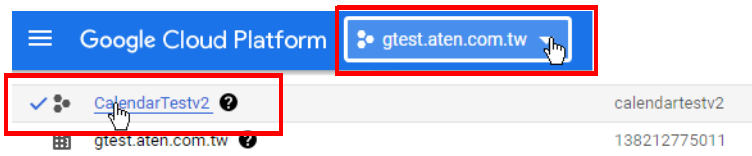

b) Go to **APIs and services > ENABLE APIs AND SERVICES**.

c) In the API Library window, search for and enable **Google Calendar API**.

d) In the API Library window, search for and enable **Admin SDK API**.

## Creating a Service Account

1. On Google Cloud console, create a service account.
  - a) From the IAM and management list, go to **Service Accounts** > + **CREATE SERVICE ACCOUNT**.
  - b) Configure the service account. For role, select **Owner**. For example:

**1 Service account details**

Service account name

The display name of this service account

Service account ID  @calendarstestv2.iam.gserviceaccount.com X ↺

Service account description

Please describe the purpose of this service account

**SET UP**

**2 Grant project access to this service account (Optional)**


Grant the "CalendarTestv2" access right to this service account so that the service account has the authority to perform specific actions on the resources in the project. [Learn more](#)

Please choose a role

Type to filter

Project	Access Context Ma...	condition
		owner
		Viewer


**owner**  
Full access to all resources.

2. Generate a certificate key for the service account.
  - a) From the service accounts list, click the settings  button of the newly created service account, and click **Manage keys**.
  - b) From the Add Key drop-down list, select **Create new key**.
  - c) In the pop-up screen, select **JSON** as the key format, and click **CREATE**. The key is created and automatically downloaded to the computer.

- d) Know where the key is saved in the computer, you will need to upload the key to RBS Configurator later.

## Authorizing Access from Third-party Applications

1. Set up Google Workspace Marketplace OAuth client.
  - a) Open the console left side menu and go to **APIs & Services > OAuth consent screen**.
  - b) For user type, select **Internal** and click **CREATE**.
  - c) Configure the OAuth consent.

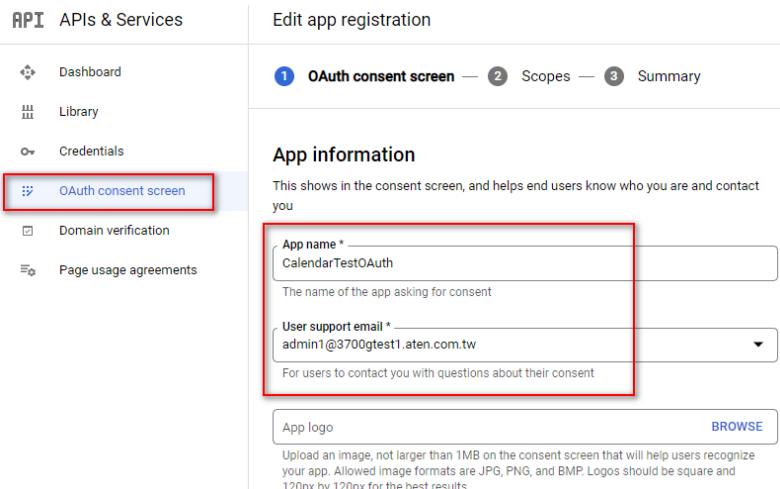


- d) From the service accounts list, click **View client ID**.
- e) Copy the client ID.

Client ID	117149984845206498199
Service account	CalendarService calendarservice@calendartestv2.iam.gserviceaccount.com
Creation date	January 12, 2021

2. Enable third-party application access.
  - a) Sign in to Google Admin console via [admin.google.com](https://admin.google.com)
  - b) Go to **Security > Access and Data Control > API Controls > MANAGE ACCESS TO THIRD-PARTY APPLICATIONS**.

- c) Click **Add app** and then select **OAuth app**.
- d) Search for the client ID of the service account which you have obtained when setting up the service account. For example:

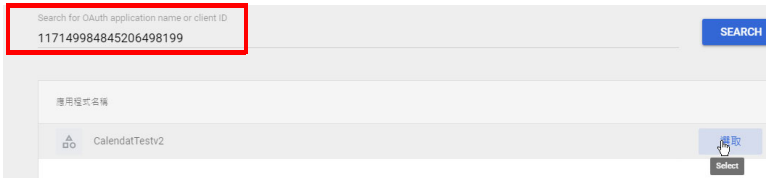

- e) Select **Trust** from the pop-up dialog.
3. Enable domain-wide delegation.
    - a) Go to **Security > Access and Data Control > API Controls > MANAGE DOMAIN-WIDE DELEGATION SETTINGS**.
    - b) For API client, click **Add New**.
    - c) In the pop-up screen, configure the following fields.
      - ◆ Client ID: paste the ID you copied in step 8.
      - ◆ Scope: fill in the following URLs separated by half-spaced commas
        - <https://www.googleapis.com/auth/calendar.events>
        - <https://www.googleapis.com/auth/calendar>
        - <https://www.googleapis.com/auth/admin.directory.user>
        - <https://www.googleapis.com/auth/admin.directory.group>
        - <https://www.googleapis.com/auth/admin.directory.resource.calendar>

## Panel Message


---

The *Panel Message* settings allow users to define the disconnection message to be displayed on the RBS Panels managed when they are not connected to the calendar server, as well as the contact info to be displayed on the RBS Panels' settings page.


To access the Panel Message settings, select **Calendar Settings > Panel Message** on your RBS Configurator.

### Disconnection Message

Define the title and content of the disconnection message, as exemplified below.

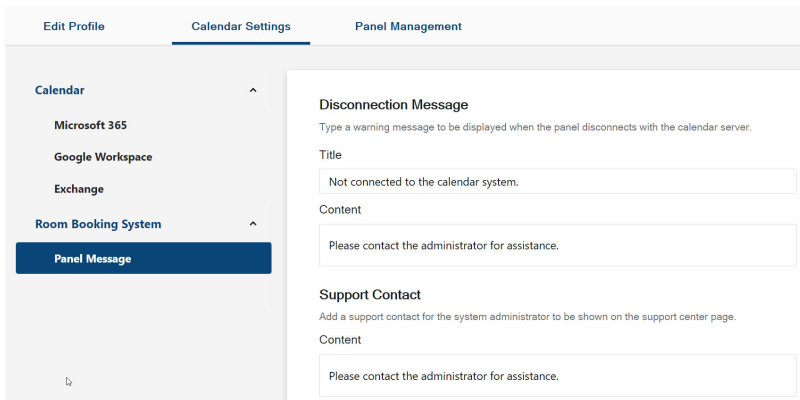

Once applied, the message will be displayed on the RBS Panels when they are not connected to the calendar server.

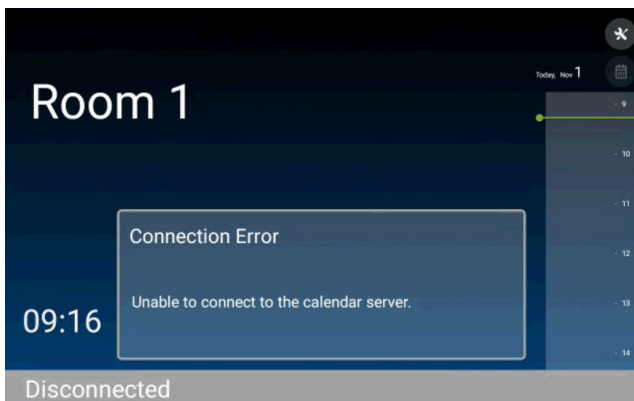



## Support Contact

Define the contact info, for support or assistance, to be displayed on the RBS Panels' settings page, as exemplified below.


### Support Contact

Add a support contact for the system administrator to be shown on the support center page.

Content

Please contact the administrator (#8888)

Once applied, the contact info is displayed on the RBS Panels' settings page.

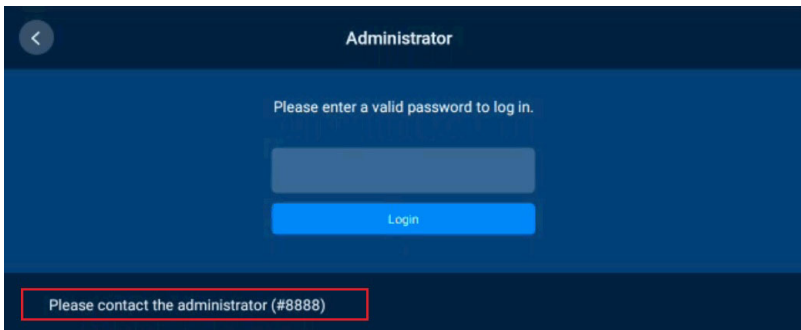

This Page Intentionally Left Blank


# Chapter 6

## Panel Management

The **Panel Management** tab, in ATEN RBS Configurator, allows you to upload setting profiles to and configure the ATEN RBS Panels managed.

### RBS Panel Search


To start, you can search for the RBS Panels you want to manage by 1 of the 2 following methods:

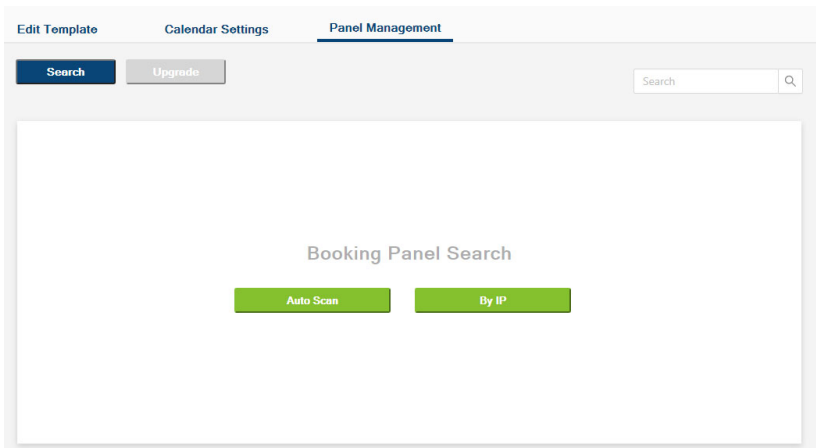




- ◆ **Auto Scan:** Automatically searches for all RBS Panels within the same subnet.
- ◆ **By IP:** Searches for RBS Panels within the LAN by entering an IP range or a specific IP address.

## Panel Management Options

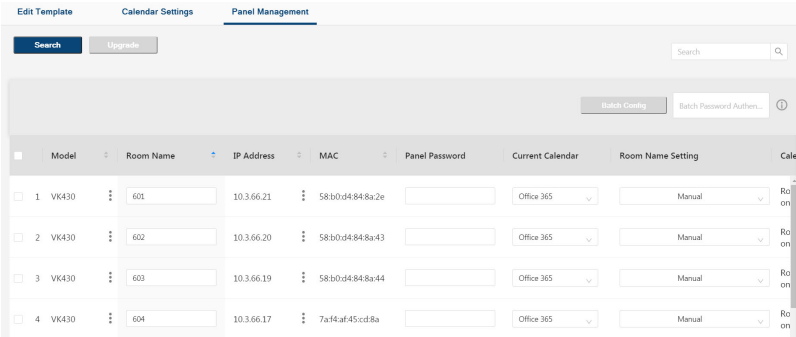After at least 1 RBS Panel has been found by the RBS Configurator, its related information and configuration options are displayed, as exemplified below.



Item	Description
Model	Displays the model of the RBS Panel. ◆ Click  to optionally reset the RBS app to default settings.
Room Name	Displays and defines the name of the meeting room managed.
IP Address	Displays the IP address of the RBS Panel. ◆ Click  to optionally adjust the network settings of the RBS Panel.
MAC	Displays the MAC address of the RBS Panel.
Panel Password	Type the password of the RBS Panel for the required authentication prior to uploading setting changes to the RBS Panel. (default password: <i>password</i> )
Current Calendar	Displays the calendar server currently used to manage the RBS Panel.
Room Name Setting	Selects how the RBS Panel is named, either manually or synchronized from the calendar server.
Calendar Account	Displays or assigns the calendar server resource account used to manage the RBS Panel. <b>Note:</b> Make sure that all RBS Panels installed in the same Unizon room use the same resource account for their managing calendar server.
Calendar Connection	Displays the connection status of the panel to the selected calendar server.
Profile	Displays or uploads the setting profile used by or to the RBS Panel.

Item	Description
Volume	Displays or adjusts the volume setting of the RBS Panel.
Brightness	Displays or adjusts the brightness of the RBS Panel.
Language	Displays or adjusts the language setting of the RBS Panel.
Time Zone	Displays or adjusts the time zone of the RBS Panel.
FW / APP Version	Respectively displays the firmware and app version of the RBS Panel.
Change Password	Click  to change the password of the RBS Panel.
Last Update	Displays the time at which the RBS Panel was last updated.

## Uploading Profiles and Setting Changes to ATEN RBS Panels

Users can upload profiles and/or setting changes to any RBS Panel managed by doing the following:

1. First, check the RBS Panels to which you want to upload profiles and/or setting changes.

<input checked="" type="checkbox"/>	Model	Room Name	IP Address
<input checked="" type="checkbox"/>	1 VK430	601 Conference Room	10.3.66.21
<input type="checkbox"/>	2 VK430	602 Conference Room	10.3.66.20
<input checked="" type="checkbox"/>	3 VK430	605 Conference Room	10.3.66.18

2. To upload profiles, select the desired profile(s) from the drop-down list in the **Profile** column, as illustrated below.

**Profile**

Keep Original ▼

**Keep Original**

ATEN Classic


Profile A ▼

**Keep Original** ▼

**Note:** Select **Keep Original** only when you don't want to replace the RBS Panel's current profile with another.

---


3. Make all of the setting changes you want to apply to the RBS Panels selected.
4. Type the login passwords of the RBS Panels selected in the **Panel Password** column, as illustrated below.



A screenshot of a web form titled "Panel Password". It features a light blue header bar with the text "Panel Password". Below the header, there are three input fields. The first field is highlighted with a light blue border and contains a series of dots. The second field is empty. The third field is also highlighted with a light blue border and contains a series of dots followed by a vertical cursor.

**Note:** If the RBS Panels to which you want to upload profiles and/or setting changes share the same panel password, you can simply type that common password in the Batch Password Authentication field instead of having to type the same password repeatedly.

---

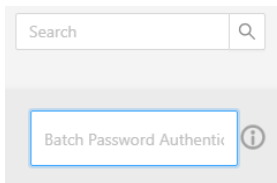

A screenshot of a web form showing a search bar at the top with the text "Search" and a magnifying glass icon. Below the search bar, there is a text input field labeled "Batch Password Authent" with an information icon (i) to its right. The input field is highlighted with a light blue border.

5. Click **Upload**.

## Batch Configure

The *Batch Config* function allows you to upload the same profile or same setting changes to multiple RBS Panels all at once, instead of having to make the same setting changes individually and repeatedly.

1. First, check the RBS Panels to which you want to batch configure.

<input type="checkbox"/>	Model	Room Name	IP Address
<input checked="" type="checkbox"/>	1 VK430	601 Conference Room	10.3.66.21
<input type="checkbox"/>	2 VK430	602 Conference Room	10.3.66.20
<input checked="" type="checkbox"/>	3 VK430	605 Conference Room	10.3.66.18

2. Type the login passwords of the RBS Panels selected in the **Panel Password** column, as illustrated below.

Panel Password

.....


.....|

**Note:** If the RBS Panels to which you want to upload profiles and/or setting changes share the same panel password, you can simply type that common password in the **Batch Password Authentication** field instead of having to type the same password repeatedly.

Search 🔍

Batch Password Authentic ℹ️

3. Select the same setting changes and/or profile you want to apply to the RBS Panels selected in **Batch Config**.



4. After all of the desired setting changes have been made, click **Upload** for them to be applied to the RBS Panels selected.



## Upgrading the RBS Panel Firmware

To upgrade the RBS panel firmware, follow the steps below.

**Note:** Make sure that the RBS panel receives adequate power supply (DC12V,17.8W, 60.70BTU or PoE 20W, 68.24BTU). With inadequate power supply, processes such as firmware upgrades and app updates may fail.

1. Download the firmware package from the VK430 product page.
2. Unzip the downloaded firmware package.
3. Upgrade using a USB drive or through the RBS Configurator.
  - ◆ **Using a USB drive**
    - (a) In the unzipped package, locate the *update.zip* file in the SD\_Upgrade folder and save it to the root directory of a USB drive, e.g. E:/.
    - (b) Insert the USB drive to the USB Type-A port of the RBS Panel.
    - (c) Press the **Function** button to access the **Settings** page.
    - (d) Tap **System > System Updates**.
    - (e) Follow the on-screen instructions to upgrade the firmware.
  - ◆ **Via RBS Configurator**
    - (a) In RBS Configurator, go to **Panel Management** and select the RBS Panels for which you want to upgrade firmware.

<input type="checkbox"/>	Model	Room Name	IP Address
<input checked="" type="checkbox"/>	1 VK430	601 Conference Room	10.3.66.21
<input type="checkbox"/>	2 VK430	602 Conference Room	10.3.66.20

(b) Type the login passwords of the selected RBS Panels in the Panel Password column, as illustrated below.

Panel Password

.....

.....|

---

**Note:** If the RBS Panels share the same panel password, you can simply type that common password in the **Batch Password Authentication** field instead of having to type the same password repeatedly.

Search

Batch Password Authentication

---

(d) Click **Upgrade**, select **FW Upgrade** and browse for the firmware file, *update.zip*.

(e) Click **Upgrade** to finish.

## Updating the RBS Panel App

To update RBS panel app, follow the steps below.

**Note:** Make sure that the RBS panel receives adequate power supply (DC12V,17.8W, 60.70BTU or PoE 20W, 68.24BTU). With inadequate power supply, processes such as firmware upgrades and app updates may fail.

1. Download the RBS app package from the VK430 product page.
2. Unzip the downloaded package.
3. In RBS Configurator, go to **Panel Management** and select the RBS Panels for which you want to update the app.

<input type="checkbox"/>	Model	Room Name	IP Address
<input checked="" type="checkbox"/>	1 VK430	601 Conference Room	10.3.66.21
<input type="checkbox"/>	2 VK430	602 Conference Room	10.3.66.20

4. Type the login passwords of the RBS Panels selected in the Panel Password column, as illustrated below.

Panel Password

.....

.....|

**Note:** If the RBS Panels share the same panel password, you can simply type that common password in the **Batch Password Authentication** field instead of having to type the same password repeatedly.

Search

Batch Password Authentir

5. Click **Upgrade**, select **App Upgrade**, and browse for the app file, *RoomBookingSystem\_V.x.x.xxx.apk*.
6. Click **Upgrade** to finish.

# Chapter 7

## Panel Password


This chapter guides you through how to define and change the passwords of your ATEN RBS Panels.


You can define your RBS Panels' passwords using one of the following methods:

- ◆ Defining the passwords directly on the RBS Panels, see page 95.
- ◆ Changing the passwords of multiple RBS Panels simultaneously, see page 96.

### Defining Passwords Directly on the Panels

To start, make sure the RBS Panel is connected to the network and turned on.

1. From its main page, tap . The login page appears.

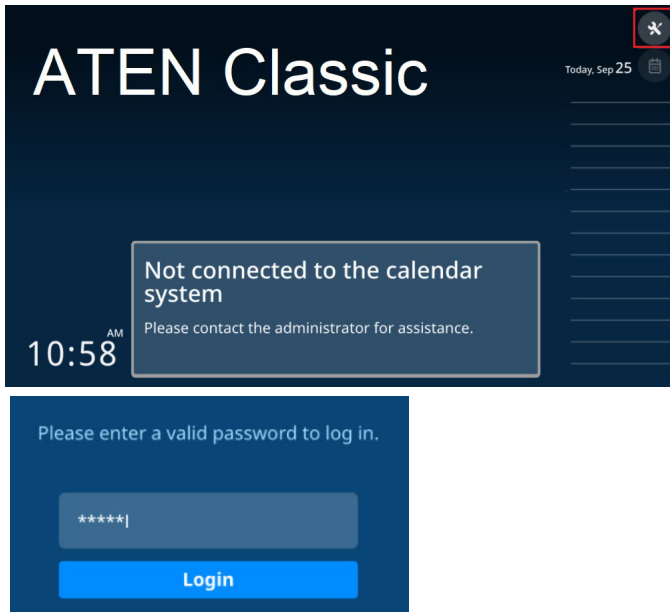

2. Log into the RBS Panel by entering its password and tapping **Login**.

---

**Note:** For first-time login, use the default password *password* to log in, and you're required to change the password.

---


3. Once logged in, you can change the panel's password by tapping **Change Password** and following the on-screen instructions.
4. Tap **Save** to finish.

## **Changing the Passwords of RBS Panels**

---

You can change the password of one RBS panel or multiples by batch.

### **Changing the Password of One RBS Panel via the Panel**

1. On the main page of the RBS panel, tap . The General settings page appears.
2. Tap **Password** on the left to change the password.
3. Clive **Save** to apply the change.

### **Changing the Passwords of Multiple RBS Panels by Batch**

To start, make sure all of the RBS Panels to be configured are connected within the same network as your ATEN RBS Configurator and turned on.

1. On your RBS Configurator, go to the **Panel Management** tab and search for the RBS Panels you want to change passwords for by 1 of the 2 following methods.
  - ♦ **Auto Scan:** Automatically searches for all RBS Panels within the same subnet.
  - ♦ **By IP:** Searches for RBS Panels within the LAN by entering an IP range or a specific IP address.

2. Check the RBS Panels for which you want to change passwords.

<input type="checkbox"/>	Model	Room Name	IP Address
<input checked="" type="checkbox"/>	1 VK430	601 Conference Room	10.3.66.21
<input type="checkbox"/>	2 VK430	602 Conference Room	10.3.66.20
<input checked="" type="checkbox"/>	3 VK430	605 Conference Room	10.3.66.18

3. Type the login passwords of the RBS Panels selected in the **Panel Password** column, as illustrated below.

Panel Password

.....


.....|

**Note:** If the RBS Panels to which you want to upload profiles and/or setting changes share the same panel password, you can simply type that common password in the **Batch Password Authentication** field instead of having to type the same password repeatedly.

Search Q

Batch Password Authentik i

4. Click **Batch Config** > **Change Password**, set a password, and click **Fill in**

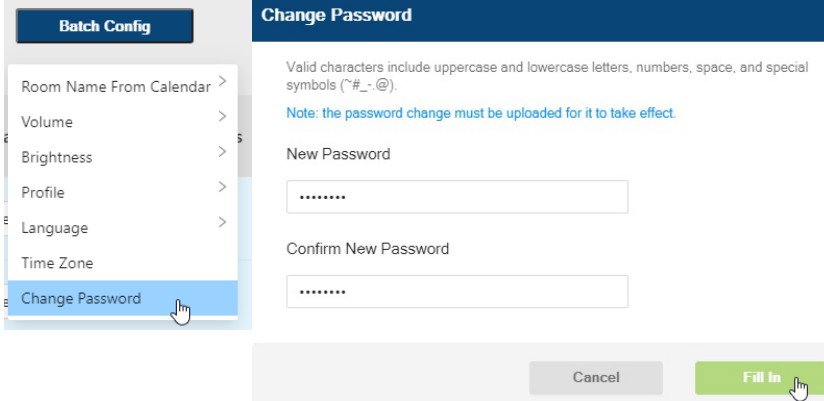

Click **Upload** to apply the password change to the RBS Panels selected.



# Chapter 8

## Panel Operation


This chapter guides you through the operations that can be done on ATEN RBS Panels, including booking or checking into rooms.

### Note:




- ◆ Before operating any of your RBS Panels, make sure the necessary configurations and profiles have been uploaded and applied to them.
- ◆ In highly humid environment, it is advised that you keep the touch panel powered on and in operation to prevent fogging inside the touch panel.

## Panel Main Page

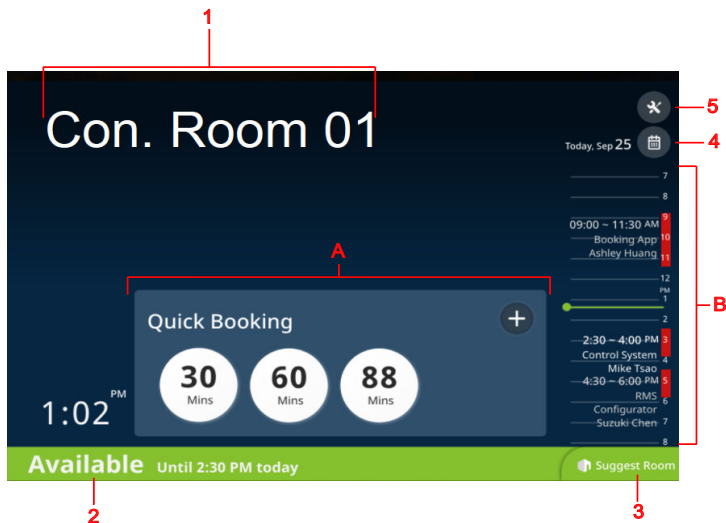The components of the RBS Panel's main page are described below:



**Note:** To customize the display style of your RBS Panels, or add a brand / logo or background image via RBS Configurator, see *GUI Design*, page 20.


No.	Item	Description						
A	Quick Booking / Check-in	<p>Provides varying functions based on the current status of the conference room: <i>Available</i>, <i>Reserved</i>, or <i>Occupied</i>.</p> <table border="1" data-bbox="277 252 938 944"> <tr> <td data-bbox="277 252 390 635">Available</td> <td data-bbox="390 252 938 635"> <ul style="list-style-type: none"> <li>◆ <b>Quick Booking:</b> Lets users start or schedule a meeting using the conference room through one of the following options:                             <ul style="list-style-type: none"> <li>◆ <b>30 / 60 / 90 / X:</b> Immediately starts a meeting for 30 / 60 / 90 / X minutes, where X is the number of minutes the room is available for until the next scheduled meeting or the end of the working hour.                                     <p><b>Note:</b> Since the maximum duration allowed for each booking is 120 minutes, X can only be 120 minutes at most.</p> </li> <li>◆  : Tap to schedule a meeting. See <i>Booking a Room</i>, page 103, for details.</li> </ul> </li> </ul> </td> </tr> <tr> <td data-bbox="277 635 390 794">Reserved</td> <td data-bbox="390 635 938 794"> <ul style="list-style-type: none"> <li>◆ <b>Check In:</b> During a meeting's scheduled time, lets users to check in to the room and start the meeting.</li> <li>◆ <b>Release:</b> During a meeting's scheduled time, lets users to cancel it and release the room for others to use.</li> </ul> </td> </tr> <tr> <td data-bbox="277 794 390 944">Occupied</td> <td data-bbox="390 794 938 944"> <ul style="list-style-type: none"> <li>◆ <b>Check Out:</b> During an ongoing meeting, lets users to check out of the room and end the meeting.</li> <li>◆ <b>Extend:</b> During an ongoing meeting, lets users to extend the meeting time if the conference room is available for further use.</li> </ul> </td> </tr> </table>	Available	<ul style="list-style-type: none"> <li>◆ <b>Quick Booking:</b> Lets users start or schedule a meeting using the conference room through one of the following options:                             <ul style="list-style-type: none"> <li>◆ <b>30 / 60 / 90 / X:</b> Immediately starts a meeting for 30 / 60 / 90 / X minutes, where X is the number of minutes the room is available for until the next scheduled meeting or the end of the working hour.                                     <p><b>Note:</b> Since the maximum duration allowed for each booking is 120 minutes, X can only be 120 minutes at most.</p> </li> <li>◆  : Tap to schedule a meeting. See <i>Booking a Room</i>, page 103, for details.</li> </ul> </li> </ul>	Reserved	<ul style="list-style-type: none"> <li>◆ <b>Check In:</b> During a meeting's scheduled time, lets users to check in to the room and start the meeting.</li> <li>◆ <b>Release:</b> During a meeting's scheduled time, lets users to cancel it and release the room for others to use.</li> </ul>	Occupied	<ul style="list-style-type: none"> <li>◆ <b>Check Out:</b> During an ongoing meeting, lets users to check out of the room and end the meeting.</li> <li>◆ <b>Extend:</b> During an ongoing meeting, lets users to extend the meeting time if the conference room is available for further use.</li> </ul>
	Available	<ul style="list-style-type: none"> <li>◆ <b>Quick Booking:</b> Lets users start or schedule a meeting using the conference room through one of the following options:                             <ul style="list-style-type: none"> <li>◆ <b>30 / 60 / 90 / X:</b> Immediately starts a meeting for 30 / 60 / 90 / X minutes, where X is the number of minutes the room is available for until the next scheduled meeting or the end of the working hour.                                     <p><b>Note:</b> Since the maximum duration allowed for each booking is 120 minutes, X can only be 120 minutes at most.</p> </li> <li>◆  : Tap to schedule a meeting. See <i>Booking a Room</i>, page 103, for details.</li> </ul> </li> </ul>						
	Reserved	<ul style="list-style-type: none"> <li>◆ <b>Check In:</b> During a meeting's scheduled time, lets users to check in to the room and start the meeting.</li> <li>◆ <b>Release:</b> During a meeting's scheduled time, lets users to cancel it and release the room for others to use.</li> </ul>						
Occupied	<ul style="list-style-type: none"> <li>◆ <b>Check Out:</b> During an ongoing meeting, lets users to check out of the room and end the meeting.</li> <li>◆ <b>Extend:</b> During an ongoing meeting, lets users to extend the meeting time if the conference room is available for further use.</li> </ul>							
B	Today's Scheduled Meetings	Displays all meetings the conference room has scheduled during the day.						
1	Room Display Name	Displays the name of the conference room.						
2	Room Status	<p>Displays the status of the conference room.</p> <ul style="list-style-type: none"> <li>◆ <b>Available:</b> Indicates the room is available for use.</li> <li>◆ <b>Reserved:</b> Indicates the room is reserved for a meeting, but not yet checked into.</li> <li>◆ <b>Occupied:</b> Indicates the room is currently hosting an ongoing meeting.</li> </ul>						
3	Suggest Room	Suggests conference rooms currently available for hosting a meeting. See <i>Using the Suggest Room Function</i> , page 104, for details.						
4	Other Dates	Displays all meetings scheduled within the Room Booking System, see <i>Viewing Meeting Schedule</i> , page 101.						

No.	Item	Description
5	Settings	Accesses administrator settings, see <i>Administrator Settings</i> , page 106.


## Viewing Meeting Schedule


### Today's Scheduled Meetings

To view meetings scheduled throughout the day, simply tap and drag on the ATEN RBS Panel's *Daily Schedule Area*.

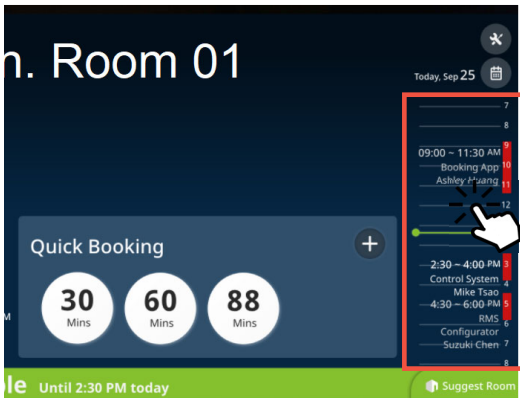


### Meetings Scheduled on Other Dates / for Other Rooms

To view meeting schedules for other dates or for other conference rooms, tap the calendar icon . The following page appears.

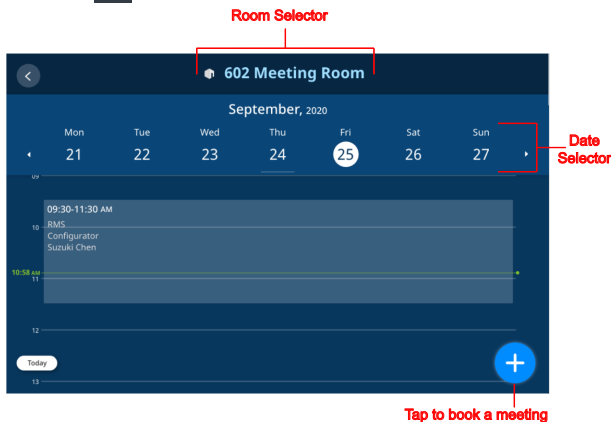




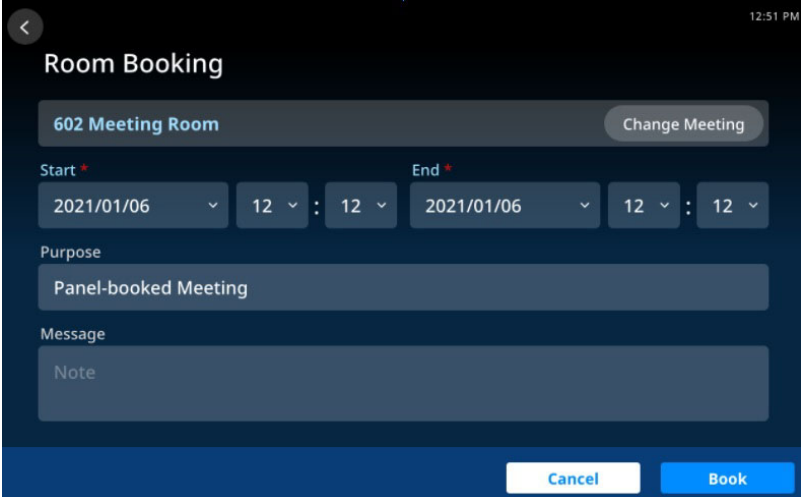
Select the desired conference room and date to view the corresponding meeting schedule.

To book a room and schedule a meeting, tap  and see *Booking a Room*, page 103 for details.

## Booking a Room

### Using the Calendar

To book a room and schedule a meeting, tap  from an RBS panel's main page, and then tap  or  from the pop-up page. The following page appears.




The screenshot shows a 'Room Booking' dialog box. At the top left is a back arrow, and at the top right is the time '12:51 PM'. The title 'Room Booking' is centered. Below the title is a text field containing '602 Meeting Room' and a 'Change Meeting' button. The 'Start' and 'End' fields are marked with an asterisk. The 'Start' field is set to '2021/01/06' with a dropdown arrow, followed by '12' and a dropdown arrow, then a colon, '12', and a dropdown arrow. The 'End' field is set to '2021/01/06' with a dropdown arrow, followed by '12' and a dropdown arrow, then a colon, '12', and a dropdown arrow. Below the time fields is a 'Purpose' field containing 'Panel-booked Meeting'. Below that is a 'Message' field with a 'Note' placeholder. At the bottom are two buttons: 'Cancel' and 'Book'.

1. Select the desired conference room.
2. Specify the meeting's start and end times.
3. Fill in other desired fields.
4. Tap **Book** to finish.


## Using the Suggest Room Function

The *Suggest Room* function suggests conference rooms, currently available for use within the Room Booking System, to users for convenient meeting hosting.


1. From the main page of a RBS Panel, tap **Suggest Room**.

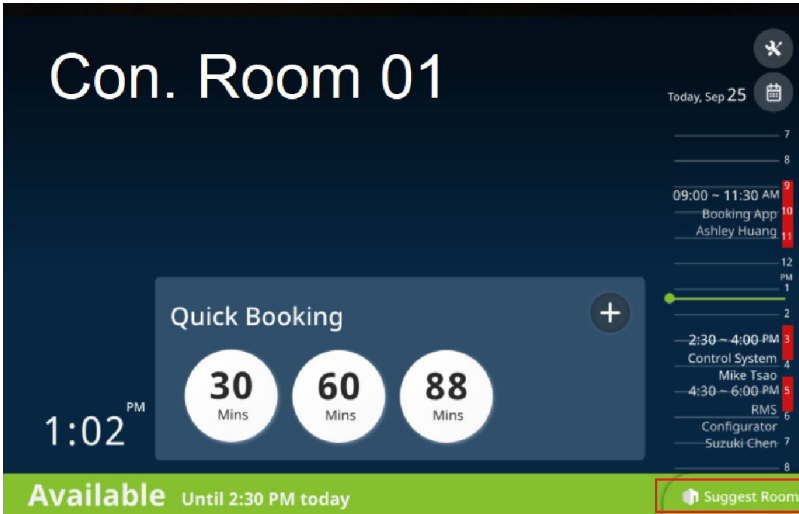

2. Select the desired meeting time.

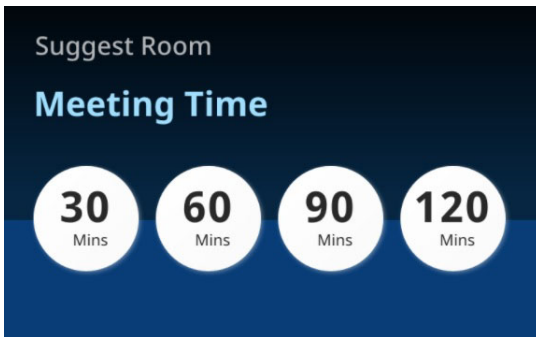


- Based on your meeting time, the Room Booking System displays the conference rooms that are currently available for use, as exemplified below.

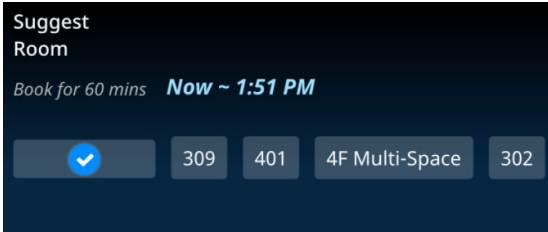


- Select the desired room to finish. The conference room selected is now hosting a meeting for the time specified. You can now go to that conference and check in to start your meeting.

## Administrator Settings

The *Settings* page of RBS Panels contains its network and password settings. To access, tap  from the RBS Panel's main page and enter the required password.


### Enabling / Disabling Access to Basic Panel Settings


To prevent alteration of basic panel settings, such as volume, display settings, network configuration, and password setup, you can disable the Brightness, Volume, and Function buttons, as illustrated below.

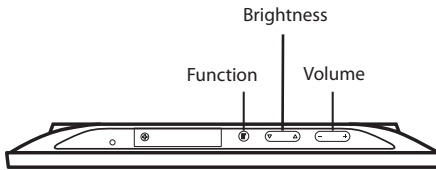

**RBS Panel Top View**

To disable the Function, Brightness, and Volume buttons, follow the steps below.

1. From the RBS panel, tap .
2. Log in with valid credentials. This screen appears.

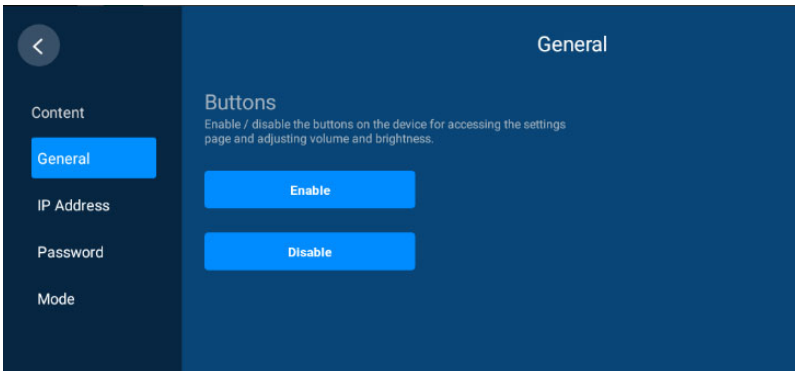


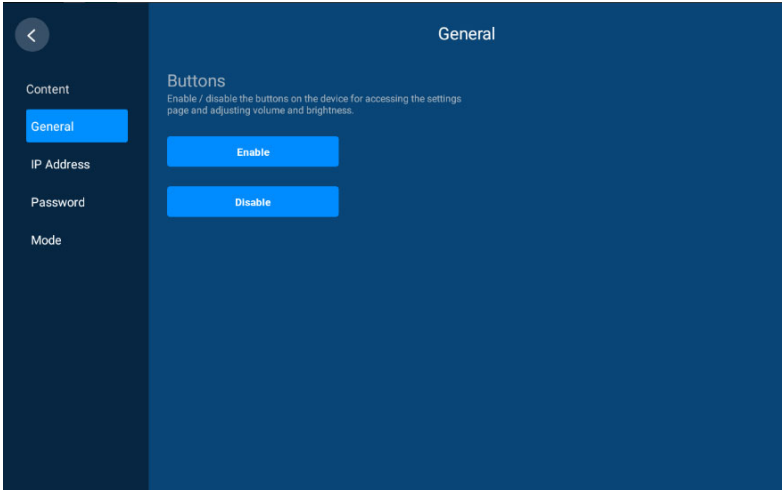
3. Tap **Disable**. A confirmation message appears.
4. Tap **Yes** to confirm the setting and restart the device.



## Configuring Network Settings

To configure the IP address of an RBS panel to a dynamic or fixed IP address, follow the steps below to access the settings.


1. From the main page of the RBS panel, tap  .
2. Log in with valid credentials. This screen appears.




3. Tap **IP Address** from the left sidebar. The Ethernet Settings page appears.
4. Configure the settings as required.
5. Tap **Save** to applied the configuration.

## **Setting the Password**

To change the panel password,

1. From the RSB panel, tap  .
2. Log in with valid credentials. This screen appears.

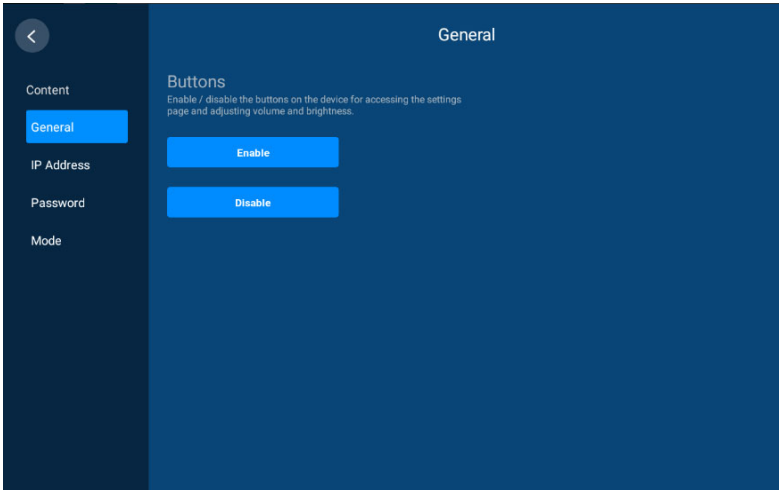


3. Tap **Password** to access the password settings.


## Demo Mode

Demo mode is an offline mode in which you can demo and try out different settings on the RBS panel without having the configurations sent and saved to the connected calendar server.


### Enabling Demo Mode

Use one of the following methods to enable demo mode.

- ◆ From the panel's settings page (  ), enter the password and then tap **Demo Mode > Enable Demo Mode**.
- ◆ *Disconnect the RBS panel from the network*
  1. Power on the RBS panel and disconnect it from the network. This screen appears.

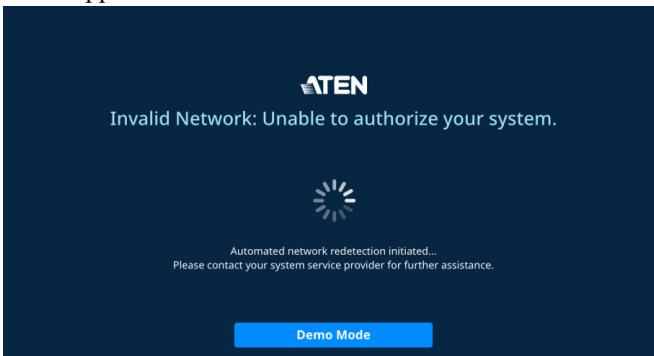


2. Tap the **Demo Mode** button, and then tap **Yes** to enter demo mode. When enabled, a red **Demo Mode** button appears on the top, as illustrated below.

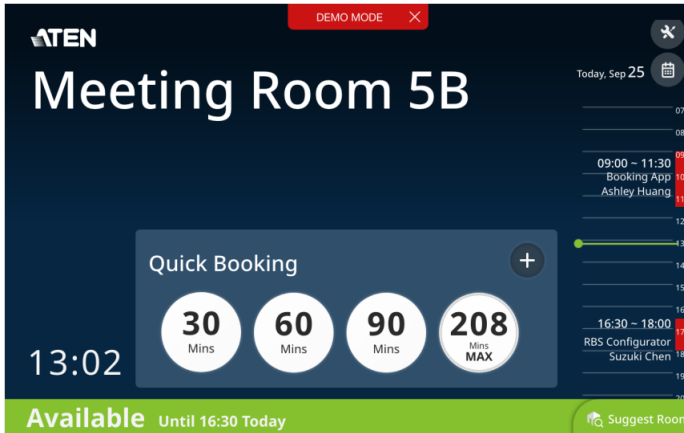

### Disabling Demo Mode

Use one of the following methods to disable demo mode.

- ◆ From the panel's main page, tap the **Demo Mode** button on the top and tap **Yes** to confirm the action.
- ◆ From the panel's settings page (  ), enter the password and then tap **Mode > Exit Demo Mode**.

---

# Appendix

---

## Safety Instructions

---

### General

- ◆ Read all of these instructions. Save them for future reference.
- ◆ Follow all warnings and instructions marked on the device.
- ◆ This product is for indoor use only.
- ◆ Do not place the device on any unstable surface (cart, stand, table, etc.). If the device falls, serious damage will result.
- ◆ Caution: Risk of explosion if the battery is replaced by an incorrect type. Always dispose of used batteries according to the proper instructions.
- ◆ Do not use the device near water.
- ◆ Do not place the device near, or over, radiators or heat registers.
- ◆ The device cabinet is provided with slots and openings to allow for adequate ventilation. To ensure reliable operation, and to protect against overheating, these openings must never be blocked or covered.
- ◆ The device should never be placed on a soft surface (bed, sofa, rug, etc.) as this will block its ventilation openings. Likewise, the device should not be placed in a built in enclosure unless adequate ventilation has been provided.
- ◆ Never spill liquid of any kind on the device.
- ◆ Unplug the device from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- ◆ The device should be operated from the type of power source indicated on the marking label. If you are not sure of the type of power available, consult your dealer or local power company.
- ◆ To prevent damage to your installation it is important that all devices are properly grounded.
- ◆ Do not allow anything to rest on the power cord or cables. Route the power cord and cables so that they cannot be stepped on or tripped over.
- ◆ Position system cables and power cables carefully; Be sure that nothing rests on any cables.
- ◆ Never push objects of any kind into or through cabinet slots. They may touch dangerous voltage points or short out parts resulting in a risk of fire or electrical shock.

- ◆ Do not attempt to service the device yourself. Refer all servicing to qualified service personnel.
- ◆ If the following conditions occur, unplug the device from the wall outlet and bring it to qualified service personnel for repair.
  - ◆ The power cord or plug has become damaged or frayed.
  - ◆ Liquid has been spilled into the device.
  - ◆ The device has been exposed to rain or water.
  - ◆ The device has been dropped, or the cabinet has been damaged.
  - ◆ The device exhibits a distinct change in performance, indicating a need for service.
  - ◆ The device does not operate normally when the operating instructions are followed.
- ◆ Only adjust those controls that are covered in the operating instructions. Improper adjustment of other controls may result in damage that will require extensive work by a qualified technician to repair.
- ◆ Avoid circuit overloads. Before connecting equipment to a circuit, know the power supply's limit and never exceed it. Always review the electrical specifications of a circuit to ensure that you are not creating a dangerous condition or that one doesn't already exist. Circuit overloads can cause a fire and destroy equipment.

# Specifications

## VK430

Processor	
Quad-core	
Memory	
SDRAM	2 GB
Flash	8 GB
Panel Specifications	
Display Type	TFT-LCD
Size	10.1"
Touch Screen	Capacitive
Resolution	1280 x 800
Aspect Ratio	16:10
Color Depth	8 bit
Contrast Ratio	800:1
Backlight	LED
Viewing Angle	±85° (H), ±85° (V)
Luminance	500 cd/m <sup>2</sup>
Interfaces	
Ethernet	1 x RJ-45 Female, 10/100/1000 BaseT
USB	1 x USB Type-A
Power	
Power over Ethernet (PoE)	802.3 at PoE+
Power Consumption	DC12V:17.8W:60.70BTU PoE: 20 W : 68.24 BTU
Environmental	
Operating Temperature	0 – 40 °C
Storage Temperature	-10 – 55 °C
Humidity	10–80% RH, Non-condensing
Physical Properties	

Housing	Plastic
Weight	0.68 kg (1.5 lb)
Dimensions (L x W x H)	26.30 x 17.78 x 2.45 cm (10.35 x 7.00 x 0.96 in.)

**Note:**

No license is required for running ATEN Room Booking System. However, additional costs may be charged for the resource accounts by the calendar service provider.

---



---

## Technical Support

---

### International

- ◆ For online technical support – including troubleshooting, documentation, and software updates: <http://eservice.aten.com>
- ◆ For telephone support, see *Telephone Support*, page iii:

### North America

Email Support		<a href="mailto:support@aten-usa.com">support@aten-usa.com</a>
Online Technical Support	Troubleshooting Documentation Software Updates	<a href="https://eservice.aten.com">https://eservice.aten.com</a>
Telephone Support		1-888-999-ATEN ext 4988

When you contact us, please have the following information ready beforehand:

- ◆ Product model number, serial number, and date of purchase.
- ◆ Your computer configuration, including operating system, revision level, expansion cards, and software.
- ◆ Any error messages displayed at the time the error occurred.
- ◆ The sequence of operations that led up to the error.
- ◆ Any other information you feel may be of help.

## **ATEN Standard Warranty Policy**

---

### **Limited Hardware Warranty**

ATEN warrants its hardware in the country of purchase against flaws in materials and workmanship for a Warranty Period of two [2] years (warranty period may vary in certain regions/countries) commencing on the date of original purchase. This warranty period includes the [LCD panel of ATEN LCD KVM switches](#). Select products are warranted for an additional year (see [A+ Warranty](#) for further details). Cables and accessories are not covered by the Standard Warranty.

### **What is covered by the Limited Hardware Warranty**

ATEN will provide a repair service, without charge, during the Warranty Period. If a product is defective, ATEN will, at its discretion, have the option to (1) repair said product with new or repaired components, or (2) replace the entire product with an identical product or with a similar product which fulfills the same function as the defective product. Replaced products assume the warranty of the original product for the remaining period or a period of 90 days, whichever is longer. When the products or components are replaced, the replacing articles shall become customer property and the replaced articles shall become the property of ATEN.

To learn more about our warranty policies, please visit our website:  
<http://www.aten.com/global/en/legal/policies/warranty-policy/>

© Copyright 2023 ATEN® International Co., Ltd.  
Released: 2023-12-01

ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd. All rights reserved. All other brand names and trademarks are the registered property of their respective owners.