



**SPECIFICATION:** 30AWG (7/0.1BC\*1P+7/0.1CCS+AL)\*5PCS+7/0.1CCS\*4C+AL+7/0.12CCS+128/0.12ALM+PVC(REACH) 6.0±0.2mm

ITEM	SPECIFICATION	
CONDUCTOR	AWG	30 AWG
	MATERIAL	BC
	COND. SIZE	7/0.10BC±0.01mm
INSULATION	MIN. AVG. THICK	0.20mm
	MATERIAL	FM-PE+SKIN
	OD	0.75±0.05mm
TWISTED PAIR	AWG	30 AWG
	MATERIAL	BC+CCS
	COND. SIZE	(7/0.10BC±0.01mm)*2+(7/0.10CCS±0.01mm)*1
SPREAD AL. FOIL	SIZE	8mm
	COVERAGE	125%
MYLAR	SIZE	14mm
	COVERAGE	125%
DRAIN	MATERIAL	CCS
	SIZE	7/0.12CCS±0.01mm
BRAID	MATERIAL	AL-MG ALLOY
	SIZE	8*16/0.12±0.01mm
	COVERAGE	85%
JACKET	MATERIAL	BLACK PVC
	COLOUR	BLACK
	O.D	6.0±0.2mm

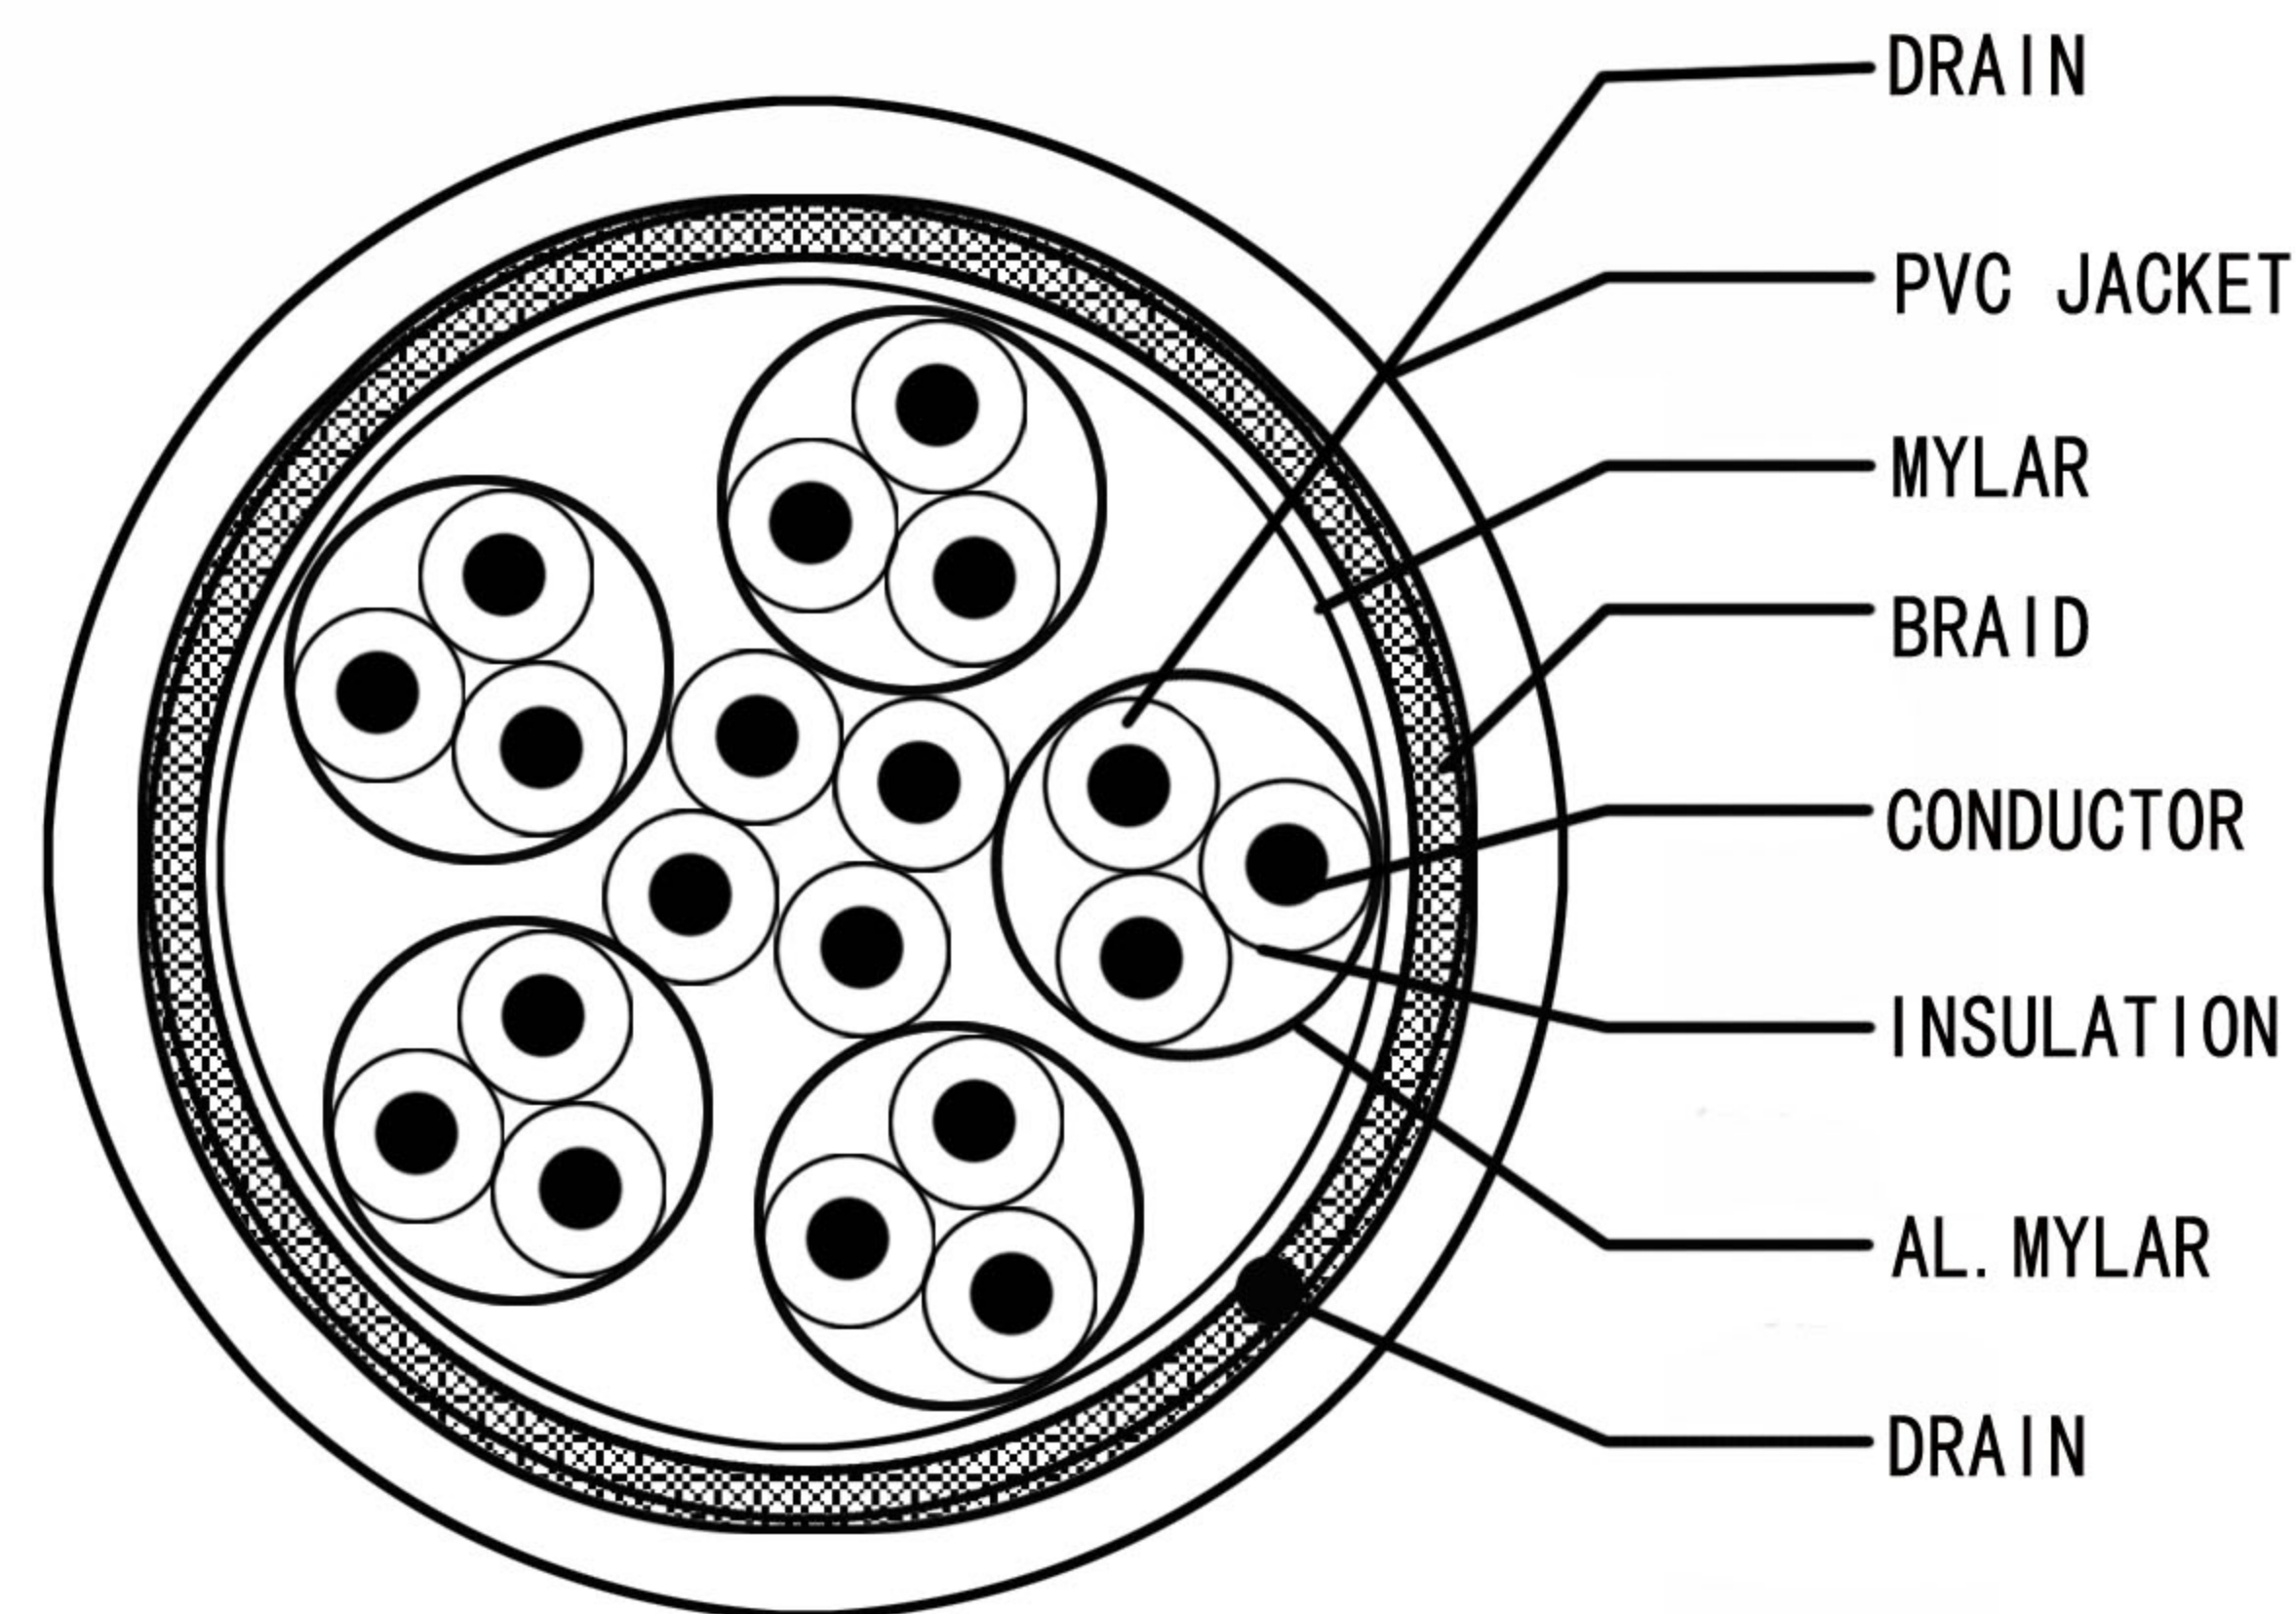

ELECTRICAL:HDTV-DVD TEST:1080P

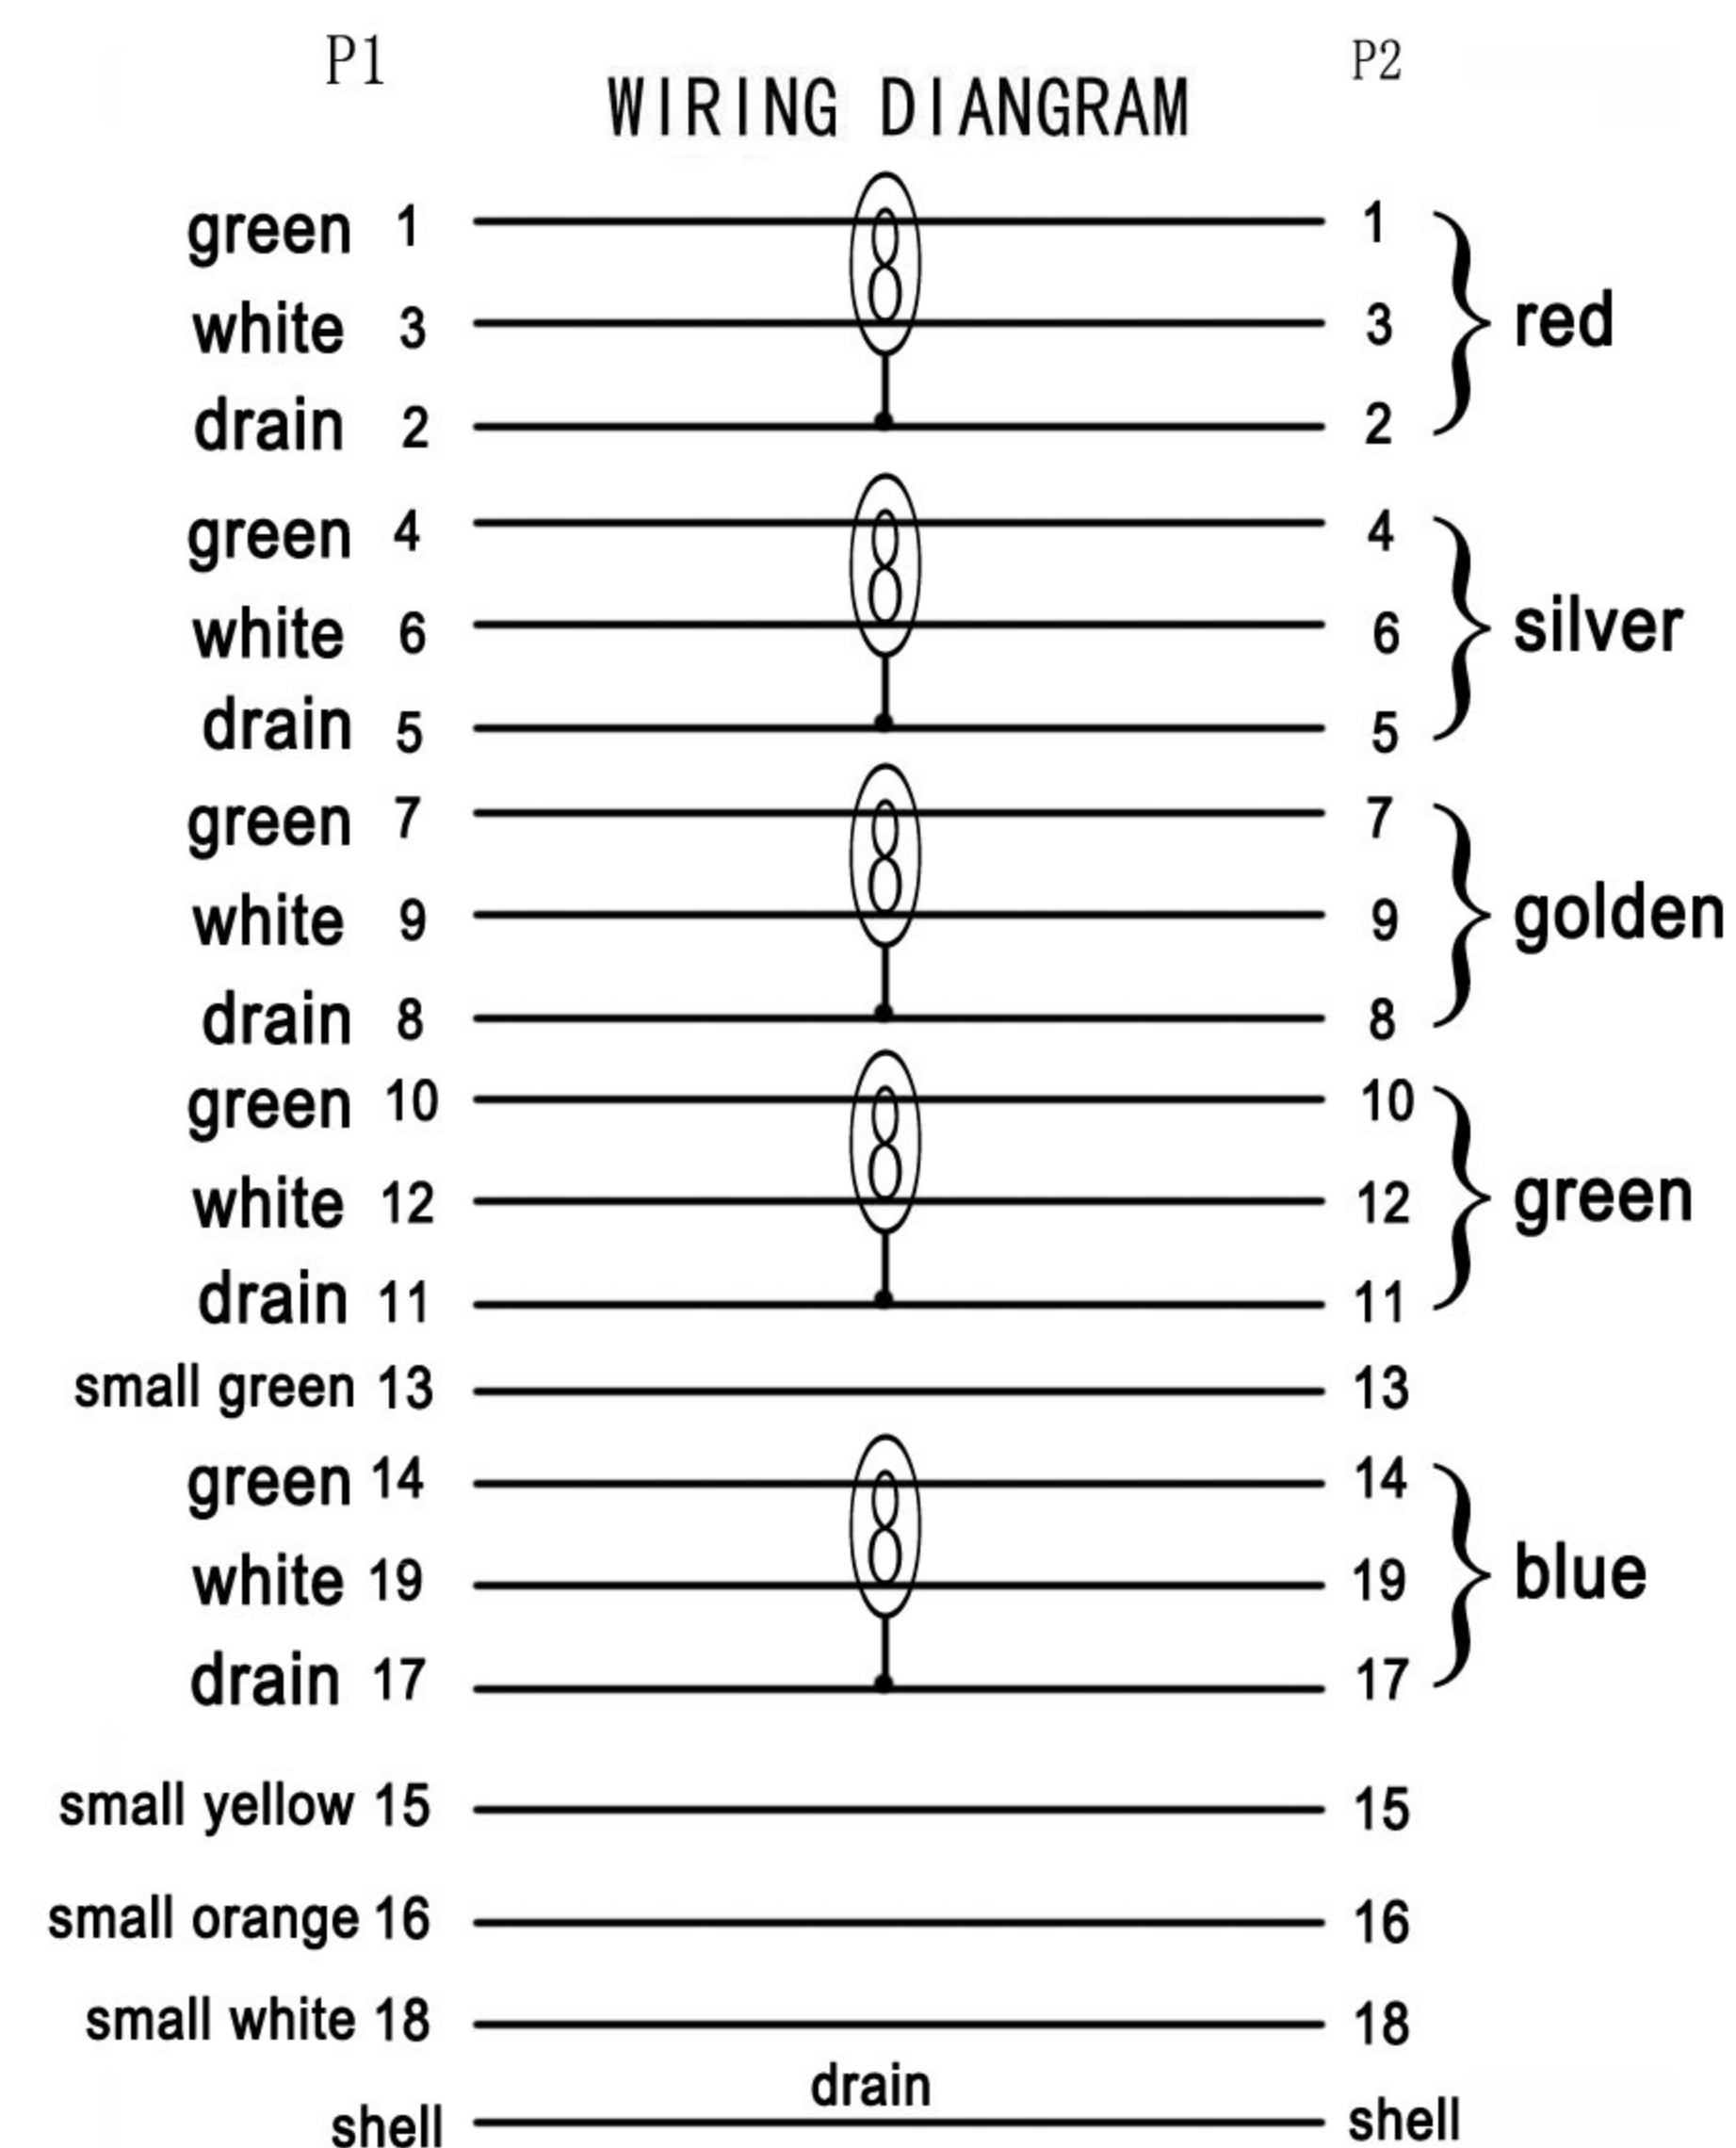

**SECOMP**

VALUE HDMI High Speed Cable with Ethernet, M - M

CHECKED: Zhang Guo Yu

CUSTOMER:

MODEL NO. : 11.99.5541 (1M)  
 11.99.5531 (1.5M)  
 11.99.5542 (2M)  
 11.99.5543 (3M)  
 11.99.5545 (5M)

APPROVED: Liu Wen Jun

DESIGN: Liu Ting Feng

DRAWING: Zhuang Qing Yan

DATE: 2017.11.22